

# VD1

WiFi & RF

## WiFi & RF 3-Button LED Dimmer

- WiFi & RF 1 channel constant voltage single color LED dimmer.
- 5A output, connect with 5 meters single color LED strip.
- Tuya smart APP cloud control, support on/off, brightness adjust, delay turn on/off light, timer run, scene edit function.
- Voice control, support for Amazon Alexa, Google Assistant, Tmall Genie and Xiaodu voice assistant.
- 3 button operation with on/off and dimming.
- Match with 2.4G single zone or multiple zone single color remote control optional.
- 4096 levels 0-100% dimming smoothly without any flash.




CE RoHS


### Technical Parameters

Input and Output		Dimming data		Safety and EMC	
Input voltage	5-24VDC	Input signal	WiFi + RF 2.4GHz + 3 button	EMC standard	EN IEC 55015/EN IEC 61547 ETSI EN 301 489-1/-3/-17
Output voltage	5-24VDC	Control distance	30m(Barrier-free space)	Safety standard	EN 61347-1/-2
Output current	Max. 5A	Dimming level	4096 (2 <sup>12</sup> ) levels	Radio Equipment	ETSI EN 300 440 ETSI EN 300 328
Output power	25W@5V 60W@12V 120W@24V	Dimming range	0-100%	Certification	CE RoHS
<b>Environment</b>		PWM Frequency	2KHz (default)	<b>Package</b>	
Operation temperature	Ta: -30°C ~ +50°C	Warranty	5 years	Size	L120 x W43 x H27mm
Case temperature (Max.)	Tc: +85°C	Protection	Over-heat, Short circuit	Gross weight	0.013kg


### Dimension

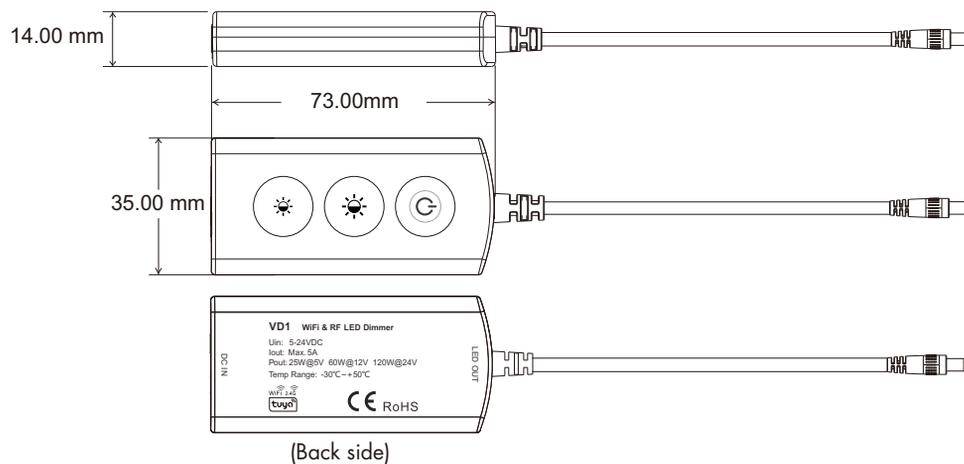

### Wiring Diagram

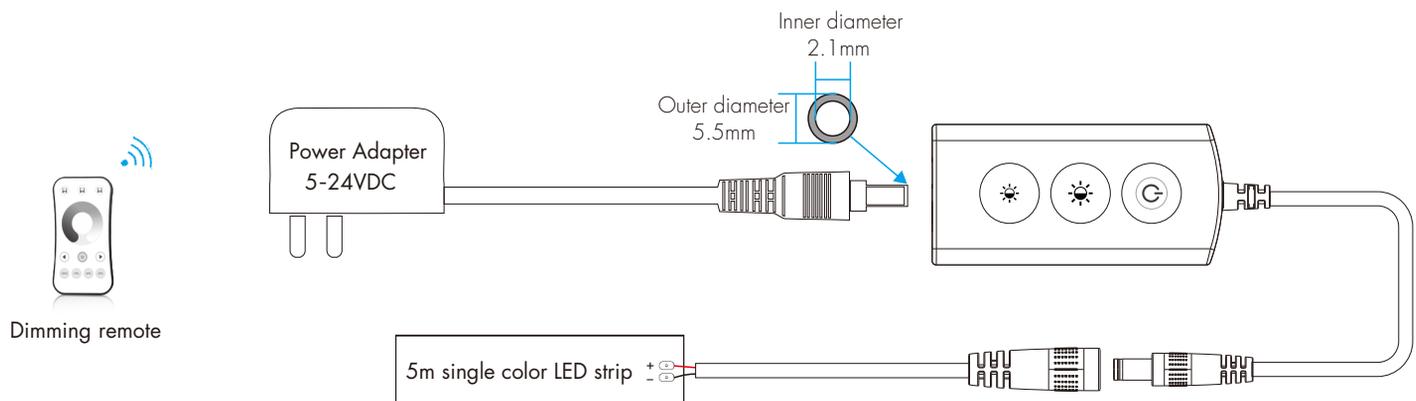

**Note:** Press and hold the and (Brightness-) button for 2s, output LED flashes 3 times, the light on/off fade time will change between 3s and 0.5s.

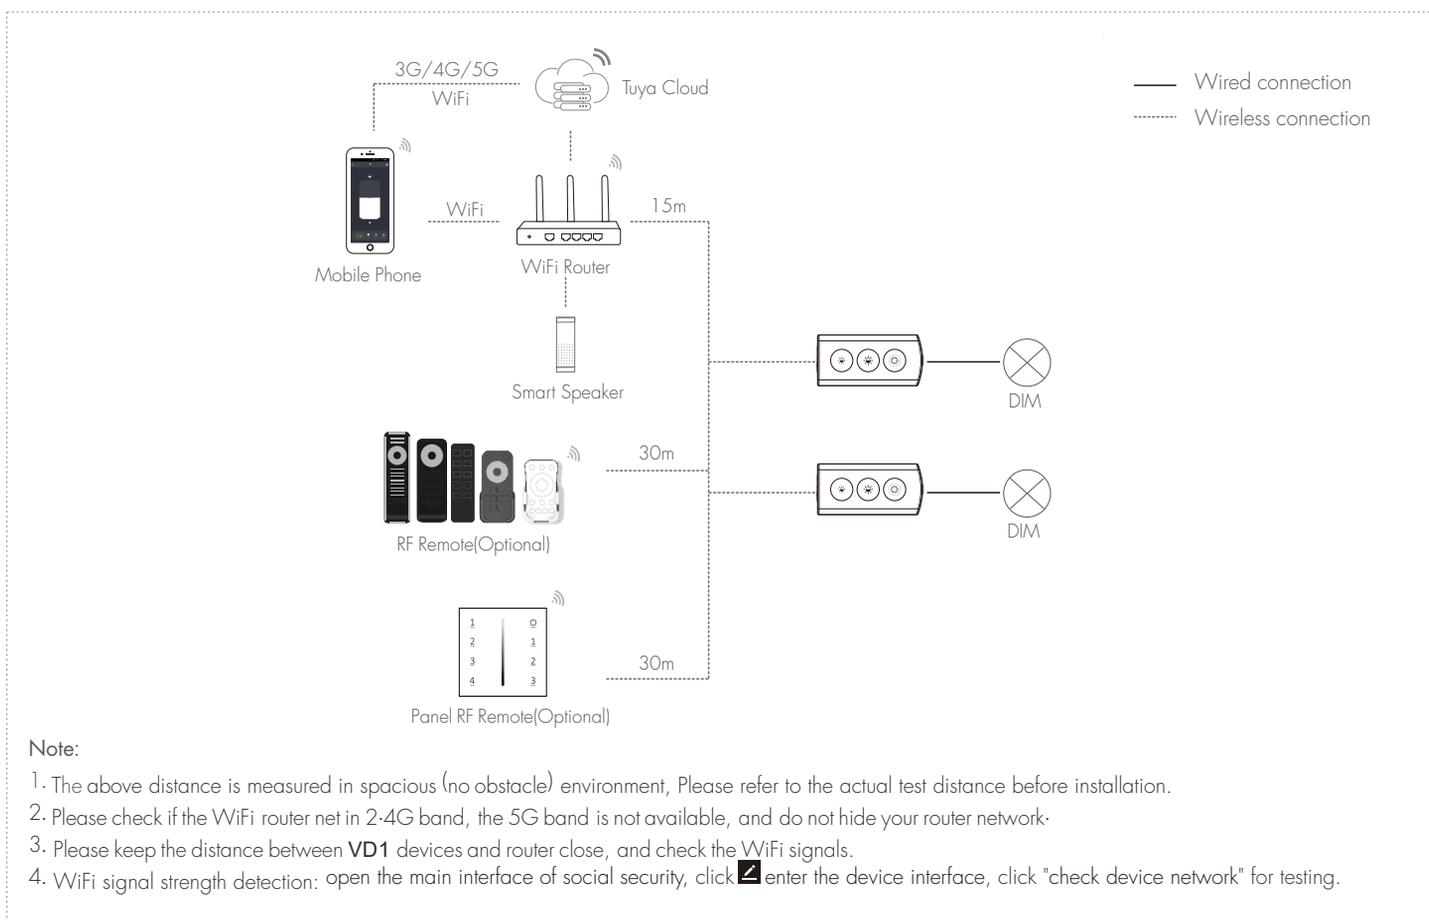

## Button Function



: Turn on or off light.



: Brightness +, short press 10 levels, long press 1-6s for continuous 256 levels adjustment.



: Brightness -, short press 10 levels, long press 1-6s for continuous 256 levels adjustment.

## Tuya Smart APP Network Connection

### • Download and open APP

Search for "Tuya Smart/Smart Life APP" in the app store, or scan the QR code on the right to download the APP. Register and login after installation.

### • APP Pairing Network

Press and hold and (Brightness+) button for 5s: clear previous network connection, enter WiFi config mode, the output LED will flash 10 times.

Repeat power on and off for 5 consecutive times, also clear previous network connection, enter WiFi config mode, the output LED will flash 10 times.

If Tuya Smart APP network connection succeed, the output LED will stop flash, and in Tuya Smart APP, you can find DIMc device.

When controlling the light with Tuya Smart/Smart Life APP, if the network connection is poor, you can control the light with Bluetooth connection within the Bluetooth control range.

Note: The light can not be directly controlled by Bluetooth without WiFi configuration.




Smart Life




Tuya Smart



**White interface**  
Touch brightness slide to adjust brightness.

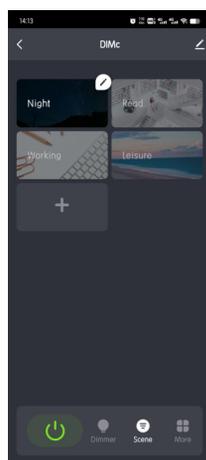

**Scene interface**  
The 1-4 scene is static color.  
the inner color of these scene can be editable.

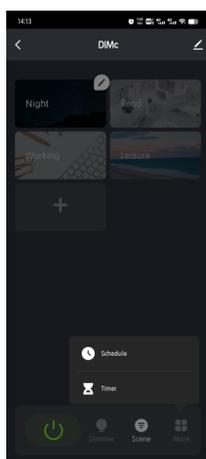

**Timer, Schedule**  
The Schedule key can add multiple timers to turn on or turn off light according to different time periods.  
The Timer key can turn on or turn off light in the next 24 hours.

## Match Remote Control (Optional)

End user can choose the suitable match/delete ways. Two options are offered for selection:

### Use and button

**Match:**  
Long press and button 2s, the output LED blinks 2 times, immediately press on/off key (single zone remote) or zone key (multiple zone remote) of the remote. The output LED blinks 3 times means match is successful.


**Delete:**  
Press and hold and button for 5s to delete all match, The output LED blinks 5 times means all matched remotes were deleted.

### Use Power Restart

**Match:**  
Switch off the power, then switch on power again, immediately short press on/off key (single zone remote) or zone key (multiple zone remote) 3 times on the remote. The output LED blinks 3 times means match is successful.

**Delete:**  
Switch off the power, then switch on power again, immediately short press on/off key (single zone remote) or zone key (multiple zone remote) 5 times on the remote. The output LED blinks 5 times means all matched remotes were deleted.


## Dimming Curve

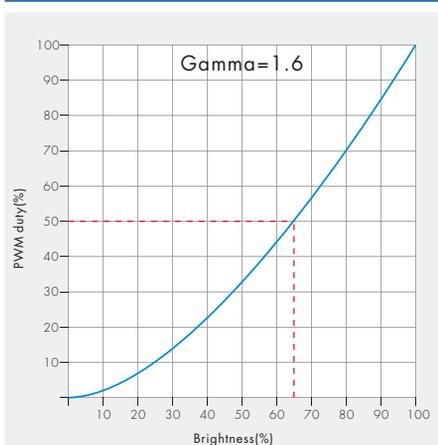

## Packing List



LED Dimmer  
1 pcs



User Manual  
1 pcs



DC Extension Cable  
(12cm)  
1 pcs