



Simple and beautiful

SPOTLIGHT

WAFER Series

LED SPOT LIGHT

Angle adjustable, color optional



ART FOR A NEW HOME

SIMPLICITY



NEW&HOT!

HERO Series

LED SPOT LIGHT

Angle adjustable, color optional

Product series

AP-KD-0010A-7W



RECESSED LED SPOT LIGHT

TECHNICAL SPECIFICATIONS

Input (Optional)	220-240V~50/60 Hz
Maximum Wattage	7W±10% Max


Number of LEDs
1 LED COB

Luminous Flux
476LM (3000K)

Main Material
Aluminum & PC Lens Diffuser

Color Temperature
3000K / 4000K / 6500K

CRI	≥90
Power Factor	≥0.8
Working Temperature	-10°C~45°C
Beam Angle (Optional)	45°
Fixture Dimmable	Non-dimmable
Electrical	- External Driver
Protection class	IP20



Especially designed for:

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.




Product Model No.	AP-KD-0010A-7W	
Packaging Detail 	39.5×26.5×30cm	
	STD PKG	12pcs
	N.W	5.28kgs
	G.W	6.2kgs

AP-KD-0010A-7W

DC30-42VDC7W LED 3000K/ PRI:476lm220-240/ incl. -V~ 50/60 Hz 0.050A

Driver SEC: Constant Current: DC170mA



Warm White 3000K ∠ 45°

	1m	739.88lx	76.77cm
	2m	184.97lx	153.55cm
	3m	82.21lx	230.32cm
	4m	46.24lx	307.09cm
	5m	29.60lx	383.86cm
	cd	Height	illuminance
		Diameter	

Option colors



Various Brand of COB LED Light Source:



Product series

AP-KD-0050A-7W



RECESSED LED SPOT LIGHT

TECHNICAL SPECIFICATIONS

Input (Optional) 220-240V~50/60 Hz

Maximum Wattage 7W±10% Max

Number of LEDs

1 LED COB

Luminous Flux

528LM (3000K)

Main Material

Aluminum & PC Lens Diffuser

Color Temperature

3000K / 4000K / 6500K

CRI ≥90

Power Factor ≥0.8


Working Temperature -10°C~45°C

Beam Angle (Optional) 24°

Fixture Dimmable Non-dimmable

Electrical ~ External Driver

Protection class IP20



Especially designed for:

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.



Product Model No. AP-KD-0050A-7W

Packaging Detail



STD PKG 30pcs

N.W 6.72kgs

G.W 9.72kgs


AP-KD-0050A-7W

DC30-42VDC7W LED 3000K/ PRI:528lm220-240/ incl. -V~ 50/60 Hz 0.050A

Driver SEC: Constant Current: DC170mA



Warm White 3000K ∠ 24°

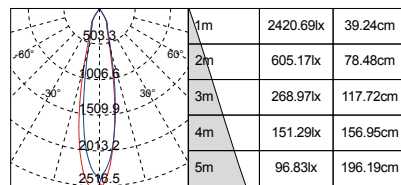

cd Height illuminance Diameter

Option colors



Various Brand of COB LED Light Source:



Product series

AP-KD-0060A-7W



RECESSED LED SPOT LIGHT

TECHNICAL SPECIFICATIONS

Input (Optional) 220-240V~50/60 Hz

Maximum Wattage 7W±10% Max

Number of LEDs

1 LED COB

Luminous Flux

476LM (3000K)

Main Material

Aluminum & PC Lens Diffuser

Color Temperature

3000K / 4000K / 6500K

CRI ≥90

Power Factor ≥0.8

Working Temperature -10°C~45°C


Beam Angle (Optional) 24°

Fixture Dimmable Non-dimmable

Electrical ~ External Driver

Protection class IP20

Cut out Ø48



Especially designed for:

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.



Product Model No. AP-KD-0060A-7W

Packaging Detail



34×25.5×28cm

STD PKG 32pcs


N.W 11.65kgs

G.W 13.6kgs


AP-KD-0060A-7W

DC30-42VDC7W LED 3000K/ PRI:476lm220-240/ incl. -V~ 50/60 Hz 0.050A

Driver SEC: Constant Current: DC170mA



Warm White 3000K ∠ 24°

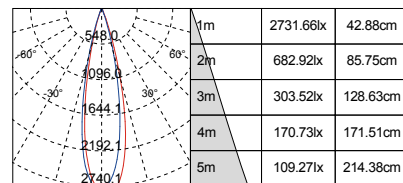

cd Height illuminance Diameter

Option colors



Various Brand of COB LED Light Source:



RECESSED LED SPOT LIGHT

TECHNICAL SPECIFICATIONS	
Input (Optional)	220-240V~50/60 Hz
Maximum Wattage	15W±10% Max


Number of LEDs	1 LED COB
----------------	-----------

Luminous Flux	867LM (3000K)
---------------	---------------

Main Material	Aluminum & PC Lens Diffuser
---------------	-----------------------------

Color Temperature	3000K / 4000K / 6500K
-------------------	-----------------------

CRI	≥90
Power Factor	≥0.92
Working Temperature	-10°C~45°C
Beam Angle (Optional)	24°
Fixture Dimmable	Non-dimmable
Electrical	- External Driver
Protection class	IP20

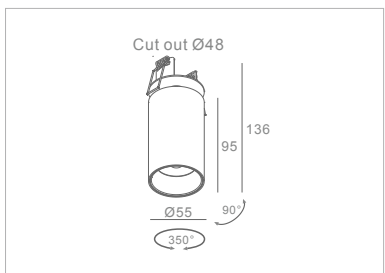

Especially designed for:

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.



Product Model No.	AP-KD-0061A-15W	
Packaging Detail	31×29×28.5cm	
	STD PKG	24pcs
	N.W	7.86kgs
	G.W	9.86kgs

AP-KD-0061A-15W

DC360mA/450mA15W LED 3000K 867lmDC30-42VDC/ incl.

-/ PRI: 220-240 V~ 50/60 Hz 0.088A



Warm White 3000K ∠ 24°

1m	5517.56lx	35.09cm
2m	1379.39lx	70.17cm
3m	613.06lx	105.26cm
4m	344.85lx	140.34cm
5m	220.70lx	175.43cm

cd Height illuminance Diameter

Option colors



Various Brand of COB LED Light Source:



Product series


AP-KD-0080A-15W



LED CANDLE LIGHT

TECHNICAL SPECIFICATIONS	
Input (Optional)	220-240V~50/60 Hz
Maximum Wattage	15W±10% Max
Number of LEDs	
1 LEDs COB	
Luminous Flux	
1275LM (3000K)	
Main Material	
Iron & PMMA	
Color Temperature	
3000K / 4000K / 6500K	

CRI	≥90
Power Factor	≥0.92
Working Temperature	-10°C~45°C
Beam Angle (Optional)	65°
Fixture Dimmable	Non-dimmable
Electrical	External Driver
Protection class	IP44

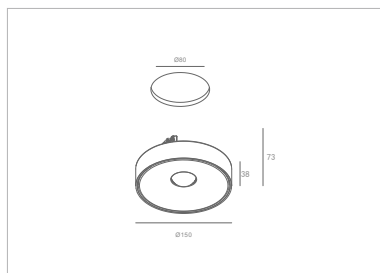

Especially designed for:

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.



Product Model No.	AP-KD-0080A-15W	
Packaging Detail	56×38×39.5cm	
	STD PKG	18pcs
	N.W	11.88kgs
	G.W	13.88kgs

AP-KD-0080A-15W

DC30-42VDC15W LED 3000K/ PRI:1275lm220-240/ incl.V~50/60 Hz 0.088A



Warm White 3000K ∠65°

Height	1m	2m	3m	4m	5m
illuminance	1325.02lx	331.25lx	147.22lx	82.81lx	53.00lx
Diameter	100.37cm	200.74cm	301.11cm	401.48cm	501.85cm

Various Brand of COB LED Light Source:



LED CANDLE LIGHT

TECHNICAL SPECIFICATIONS	
Input (Optional)	220-240V~50/60 Hz
Maximum Wattage	24W±10% Max


Number of LEDs
1 LEDs COB

Luminous Flux
2040LM (3000K)

Main Material
Iron & PMMA

Color Temperature
3000K / 4000K / 6500K

CRI	≥90
Power Factor	≥0.92
Working Temperature	-10°C~45°C
Beam Angle (Optional)	65°
Fixture Dimmable	Non-dimmable
Electrical	External Driver
Protection class	IP44

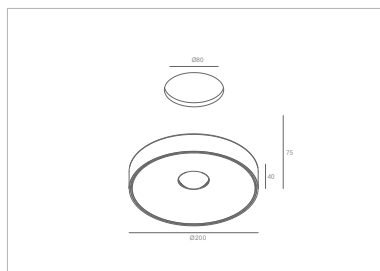

Especially designed for:

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.



Product Model No.	AP-KD-0081A-24W	
Packaging Detail	48×48×39.5cm	
	STD PKG	12pcs
	N.W	11.52kgs
	G.W	13.52kgs

AP-KD-0081A-24W

DC27-40VDC30W LED 3000K/ PRI:2040lm220-240/ incl.V~50/60 Hz 0.135A

Driver SEC: Constant Current: DC600mA



Warm White 3000K ∠65°

1m	1056.64lx	252.79cm
2m	264.16lx	505.58cm
3m	117.40lx	758.37cm
4m	66.04lx	1011.16cm
5m	42.27lx	1263.95cm
cd	Height	illuminance
		Diameter

Various Brand of COB LED Light Source:



LED CANDLE LIGHT

TECHNICAL SPECIFICATIONS	
Input (Optional)	220-240V~50/60 Hz
Maximum Wattage	30W±10% Max


Number of LEDs
1 LEDs COB

Luminous Flux
2550LM (3000K)

Main Material
Iron & PMMA

Color Temperature
3000K / 4000K / 6500K

CRI	≥90
Power Factor	≥0.92
Working Temperature	-10°C~45°C
Beam Angle (Optional)	65°
Fixture Dimmable	Non-dimmable
Electrical	External Driver
Protection class	IP44

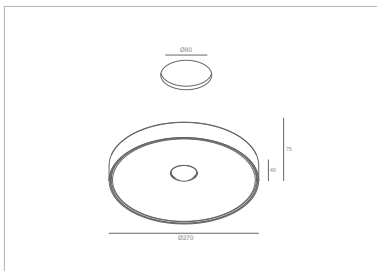

Especially designed for:

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.



Product Model No.	AP-KD-0082A-30W	
Packaging Detail	62×62×28cm	
	STD PKG	8pcs
	N.W	11.12kgs
	G.W	13.12kgs

AP-KD-0082A-30W

DC30-42VDC30W LED 3000K/

PRI:2550lm220-240/ incl.V~50/60 Hz 0.170A

Driver SEC: Constant Current: DC750mA



Warm White 3000K ∠65°

1m	2452.31lx	140.04cm
2m	613.08lx	280.08cm
3m	272.48lx	420.12cm
4m	153.27lx	560.17cm
5m	98.09lx	700.21cm

cd	Height	illuminance	Diameter
----	--------	-------------	----------

Various Brand of COB LED Light Source:



Product series

AP-KD-0090A-8W



LED CANDLE LIGHT

TECHNICAL SPECIFICATIONS	
Input (Optional)	220-240V~50/60 Hz
Maximum Wattage	8W±10% Max


Number of LEDs	
1 LEDs COB	

Luminous Flux	
610LM (3000K)	

Main Material	
Aluminum & PC Lens Diffuser	

Color Temperature	
3000K / 4000K / 6500K	

CRI	≥90
Power Factor	≥0.55
Working Temperature	-10°C~45°C
Beam Angle (Optional)	45°
Fixture Dimmable	Non-dimmable
Electrical	External Driver
Protection class	IP54

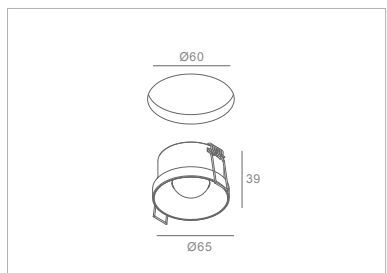

Especially designed for:

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.



Product Model No.	AP-KD-0090A-8W	
Packaging Detail	34×34×28cm	
	STD PKG	48pcs
	N.W	10.08kgs
	G.W	12.08kgs

AP-KD-0090A-8W

DC200mA8W LED 3000KDC28-42VDC610lm / incl./ PRI:-220-240 V~ 50/60 Hz 0.12A

ELECTRONIC Driver SEC: Constant Current:



Warm White 3000K ∠ 45°

	1m	1182.33lx	76.37cm
	2m	295.58lx	152.75cm
	3m	131.37lx	229.12cm
	4m	73.90lx	305.49cm
	5m	47.29lx	381.86cm

cd Height illuminance Diameter

Option colors



Various Brand of COB LED Light Source:



LED CANDLE LIGHT

TECHNICAL SPECIFICATIONS

Input (Optional) 220-240V~50/60 Hz

Maximum Wattage 12W±10% Max

Number of LEDs

1 LEDs COB

Luminous Flux

939LM (3000K)

Main Material

Aluminum & PC Lens Diffuser

Color Temperature

3000K / 4000K / 6500K

CRI ≥90

Power Factor ≥0.55


Working Temperature -10°C~45°C

Beam Angle (Optional) 45°

Fixture Dimmable Non-dimmable

Electrical

Protection class IP54



Especially designed for:

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.



Product Model No. AP-KD-0091A-12W

Packaging Detail 30.5×30.5×36.5cm



STD PKG 36pcs

N.W 7.2kgs


G.W 9.2kgs

AP-KD-0091A-12W

12WDC300mALED 3000KDC28-42VDC939lm / /incl.PR:-
ELECTRONIC220-240 V~ 50/60DriverHz SEC:0.18A
Constant Current



Warm White 3000K ∠ 45°

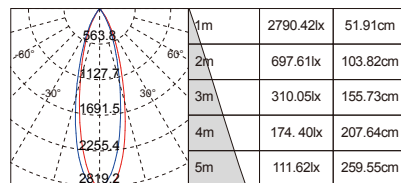

cd Height illuminance Diameter

Option colors



Various Brand of COB LED Light Source:



LED CANDLE LIGHT

TECHNICAL SPECIFICATIONS	
Input (Optional)	220-240V~50/60 Hz
Maximum Wattage	16W±10% Max


Number of LEDs	
1 LEDs COB	

Luminous Flux	
1387LM (3000K)	

Main Material	
Aluminum & PC Lens Diffuser	

Color Temperature	
3000K / 4000K / 6500K	

CRI	≥90
Power Factor	≥0.55
Working Temperature	-10°C~45°C
Beam Angle (Optional)	45°
Fixture Dimmable	Non-dimmable
Electrical	External Driver
Protection class	IP54

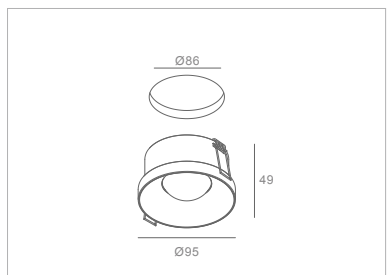

Especially designed for:

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.



Product Model No.	AP-KD-0092A-16W	
Packaging Detail	38×38×30.5cm	
	STD PKG	27pcs
	N.W	8.56kgs
	G.W	10.56kgs

AP-KD-0092A-16W

DC400mA16W LED 3000KDC28-40VDC1387lm // PRL:incl. 220-240-V~ 50/60 Hz 0.23A

ELECTRONIC Driver SEC: Constant Current:



Warm White 3000K ∠ 45°

	1m	1641.02lx	121.60cm
	2m	410.26lx	243.20cm
	3m	182.34lx	364.81cm
	4m	102.56lx	486.41cm
	5m	65.64lx	608.01cm
cd	Height	illuminance	Diameter

Option colors



Various Brand of COB LED Light Source:



Product series

AP-KD-0093A-8W



LED CANDLE LIGHT

TECHNICAL SPECIFICATIONS

Input (Optional)	220-240V~50/60 Hz
Maximum Wattage	8W±10% Max

Number of LEDs

1 LEDs COB

Luminous Flux

610LM (3000K)


Main Material

Aluminum & PC Lens Diffuser

Color Temperature

3000K / 4000K / 6500K

CRI	≥90
Power Factor	≥0.55
Working Temperature	-10°C~45°C
Beam Angle (Optional)	45°
Fixture Dimmable	Non-dimmable
Electrical	External Driver
Protection class	IP54



Especially designed for:

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.



Product Model No.	AP-KD-0093A-8W	
Packaging Detail	34×34×28cm	
	STD PKG	48pcs
	N.W	12kgs
	G.W	14kgs

AP-KD-0093A-8W

DC200mA8W LED 3000KDC28-42VDC610lm / incl./

PRI:-220-240 V~ 50/60 Hz 0.12
ELECTRONIC Driver SEC: Constant Current:



Warm White 3000K ∠ 45°

1m	1182.33lx	76.37cm
2m	295.58lx	152.75cm
3m	131.37lx	229.12cm
4m	73.90lx	305.49cm
5m	47.29lx	381.86cm

cd	Height	illuminance	Diameter
----	--------	-------------	----------

Option colors




Various Brand of COB LED Light Source:



LED CANDLE
LIGHT

TECHNICAL SPECIFICATIONS	
Input (Optional)	220-240V~50/60 Hz
Maximum Wattage	12W±10% Max
Number of LEDs	
1 LEDs COB	
Luminous Flux	
939LM (3000K)	
Main Material	
Aluminum & PC Lens Diffuser	
Color Temperature	
3000K / 4000K / 6500K	

CRI	≥90
Power Factor	≥0.55
Working Temperature	-10°C~45°C
Beam Angle (Optional)	45°
Fixture Dimmable	Non-dimmable
Electrical	External Driver
Protection class	IP54

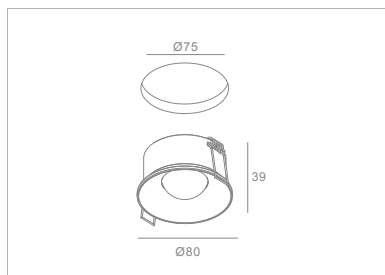

Especially designed for:

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.



Product Model No.	AP-KD-0094A-12W	
Packaging Detail	30.5×30.5×36.5cm	
	STD PKG	36pcs
	N.W	14.76kgs
	G.W	16.76kgs

AP-KD-0094A-12W

12WDC300mALED 3000KDC28-42VDC939lm / /incl.PRI:-
ELECTRONIC220-240 V~ 50/60DriverHz SEC:0.18AC
onstant Current:



Warm White 3000K ∠ 45°

1m	2790.42lx	51.91cm
2m	697.61lx	103.82cm
3m	310.05lx	155.73cm
4m	174.40lx	207.64cm
5m	111.62lx	259.55cm

cd	Height	illuminance	Diameter
----	--------	-------------	----------

Option colors



Various Brand of COB LED Light Source:



LED CANDLE LIGHT

TECHNICAL SPECIFICATIONS	
Input (Optional)	220-240V~50/60 Hz
Maximum Wattage	16W±10% Max


Number of LEDs	
1 LEDs COB	

Luminous Flux	
1387LM (3000K)	

Main Material	
Aluminum & PC Lens Diffuser	

Color Temperature	
3000K / 4000K / 6500K	

CRI	≥90
Power Factor	≥0.55
Working Temperature	-10°C~45°C
Beam Angle (Optional)	45°
Fixture Dimmable	Non-dimmable
Electrical	External Driver
Protection class	IP54

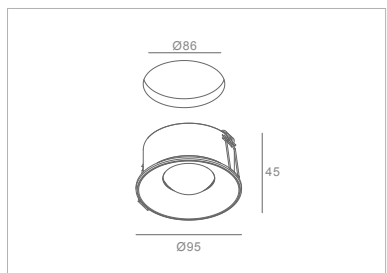

Especially designed for:

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.



Product Model No.	AP-KD-0095A-16W	
Packaging Detail	38×38×30.5cm	
	STD PKG	27pcs
	N.W	8.56kgs
	G.W	10.56kgs

AP-KD-0095A-16W

DC400mA16W LED 3000KDC28-40VDC1387lm / /PRI:incl. 220-240-V~ 50/60 Hz 0.23A

ELECTRONIC Driver SEC: Constant Current:



Warm White 3000K ∠ 45°

	1m	1641.02lx	121.60cm
	2m	410.26lx	243.20cm
	3m	182.34lx	364.81cm
	4m	102.56lx	486.41cm
	5m	65.64lx	608.01cm
	cd	Height	illuminance
		illuminance	Diameter

Option colors



Various Brand of COB LED Light Source:



Product series

AP-KD-0101A-6W



RECESSED LED SPOT LIGHT

TECHNICAL SPECIFICATIONS

Input (Optional)	220-240V~50/60 Hz
Maximum Wattage	6W±10% Max

Number of LEDs

1 LEDs COB

Luminous Flux

600LM (3000K)


Main Material

Aluminum & Frosted Plastic Diffuser

Color Temperature

3000K / 4000K / 6500K

CRI	≥90
Power Factor	≥0.92
Working Temperature	-10°C~45°C
Beam Angle (Optional)	13°
Fixture Dimmable	Non-dimmable
Electrical	External Driver
Protection class	IP20



Especially designed for:

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.



Product Model No.	AP-KD-0101A-6W	
Packaging Detail	52×41.2×40cm	
	STD PKG	80pcs
	N.W	15.9kgs
	G.W	17.4kgs

AP-KD-0101A-6W

DC2000mA6W CREE LED(COB)DC2.5-5VDC3000K/

PRI:600lm220-240/ incl.V~50/60 Hz 0.1A

Driver SEC: Constant Current:



Warm White 3000K ∠ 13°

1m	5989.06lx	22.79cm
2m	1497.27lx	45.57cm
3m	665.45lx	68.36cm
4m	374.32lx	91.15cm
5m	239.56lx	113.94cm

cd Height illuminance Diameter

Option colors



Various Brand of COB LED Light Source:



Product series

AP-KD-0102A-6W



RECESSED LED SPOT LIGHT

TECHNICAL SPECIFICATIONS	
Input (Optional)	220-240V~50/60 Hz
Maximum Wattage	6W±10% Max


Number of LEDs	
1 LEDs COB	

Luminous Flux	
600LM (3000K)	

Main Material	
Aluminum & PC Lens Diffuser	

Color Temperature	
3000K / 4000K / 6500K	

CRI	≥90
Power Factor	≥0.92
Working Temperature	-10°C~45°C
Beam Angle (Optional)	13°
Fixture Dimmable	Non-dimmable
Electrical	External Driver
Protection class	IP20

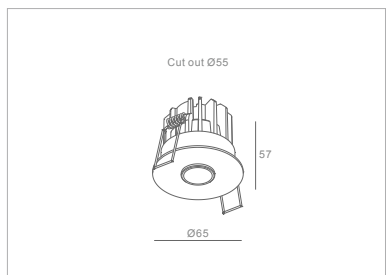

Especially designed for:

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.




Product Model No.	AP-KD-0102A-6W	
Packaging Detail	52×41.2×40cm	
	STD PKG	80pcs
	N.W	15.9kgs
	G.W	17.4kgs

AP-KD-0102A-6W

DC2000mA6W CREE LED(COB)DC2.5-5VDC3000K/

PRI:600lm220-240/ incl.V~50/60 Hz 0.1A

Driver SEC: Constant Current:



Warm White 3000K ∠ 13°

	1m	5989.06lx	22.79cm
	2m	1497.27lx	45.57cm
	3m	665.45lx	68.36cm
	4m	374.32lx	91.15cm
	5m	239.56lx	113.94cm
cd	Height	illuminance	Diameter

Option colors



Various Brand of COB LED Light Source:



Product series

AP-KD-0100A-6W



RECESSED LED SPOT LIGHT

TECHNICAL SPECIFICATIONS

Input (Optional)	220-240V~50/60 Hz
Maximum Wattage	6W±10% Max

Number of LEDs

1 LEDs COB

Luminous Flux

600LM (3000K)

Main Material

Aluminum & Frosted Plastic Diffuser

Color Temperature

3000K / 4000K / 6500K

CRI ≥90

Power Factor ≥0.92


Working Temperature -10°C~45°C

Beam Angle (Optional) 16°

Fixture Dimmable Non-dimmable

Electrical

Protection class IP20

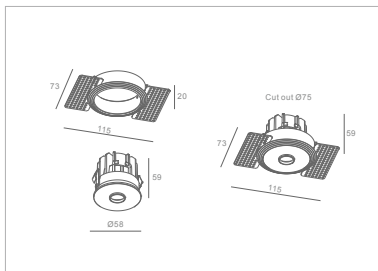

Especially designed for:

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.



Product Model No.	AP-KD-0100A-6W	
Packaging Detail	52×41.2×40cm	
	STD PKG	80pcs
	N.W	15.9kgs
	G.W	17.4kgs

AP-KD-0100A-6W

DC2000mA6W CREE LED(COB)DC2.5-5VDC3000K/

PRI:600lm220-240/ incl.V~50/60 Hz 0.1A

Driver SEC: Constant Current:



Warm White 3000K ∠ 16°

1m	3635.05lx	28.64cm
2m	908.76lx	57.28cm
3m	403.89lx	85.93cm
4m	227.19lx	114.57cm
5m	145.40lx	143.21cm

cd Height illuminance Diameter

Option colors



Various Brand of COB LED Light Source:



Product series

AP-KD-0110A-12W



RECESSED LED SPOT LIGHT

TECHNICAL SPECIFICATIONS

Input (Optional)	220-240V~50/60 Hz
Maximum Wattage	12W±10% Max


Number of LEDs
1 LEDs COB

Luminous Flux
822LM (3000K)

Main Material
Aluminum & PC Lens Diffuser

Color Temperature
3000K / 4000K / 6500K

CRI	≥90
Power Factor	≥0.8
Working Temperature	-10°C~45°C
Beam Angle (Optional)	24°
Fixture Dimmable	Non-dimmable
Electrical	External Driver
Protection class	IP20



Especially designed for:

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.



Product Model No.	AP-KD-0110A-12W	
Packaging Detail	44×41×34.5cm	
	STD PKG	24pcs
	N.W	7.32kgs
	G.W	9.32kgs

AP-KD-0110A-12W

DC30-50VDC12W LED 3000K/


PRI:822lm220-240/ incl.V~50/60 Hz 0.88A

Driver SEC: Constant Current: DC300mA



	1m	3334.36lx	47.28cm
	2m	833.59lx	94.56cm
	3m	370.48lx	141.83cm
	4m	208.40lx	189.11cm
	5m	133.37lx	236.39cm
cd	Height	illuminance	Diameter

Option colors



Various Brand of COB LED Light Source:



Product series

AP-KD-0120A-10W



RECESSED LED SPOT LIGHT

TECHNICAL SPECIFICATIONS	
Input (Optional)	220-240V~50/60 Hz
Maximum Wattage	10W±10% Max


Number of LEDs	
1 LEDs COB	

Luminous Flux	
680LM (3000K)	

Main Material	
Aluminum & PC	

Color Temperature	
3000K / 4000K / 6500K	

CRI	≥90
Power Factor	≥0.55
Working Temperature	-10°C~45°C
Zoom Angle:	15°-60°
Fixture Dimmable	Non-dimmable
Electrical	External Driver
Protection class	IP20

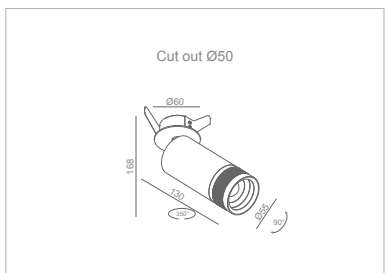

Especially designed for:

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.



Product Model No.	AP-KD-0120A-10W	
Packaging Detail	44×41×34.5cm	
	STD PKG	24pcs
	N.W	10.73kgs
	G.W	13.52kgs

AP-KD-0120A-10W

DC28-42VDC10W LED 3000K/

PRI:680lm220-240/ incl.V~50/60 Hz 0.15A

Driver SEC: Constant Current: DC250mA



Warm White 3000K 15°

1m	7649.07lx	24.03cm
2m	1912.27lx	48.05cm
3m	849.90lx	72.08cm
4m	478.07lx	96.10cm
5m	305.96lx	120.13cm

cd Height illuminance Diameter

Option colors



Various Brand of COB LED Light Source:



Product series

AP-KD-0130A-5W



RECESSED LED SPOT LIGHT

TECHNICAL SPECIFICATIONS

Input (Optional) 220-240V~50/60 Hz

Maximum Wattage 5W±10% Max

Number of LEDs

1 LEDs COB

Luminous Flux

229LM (3000K)

Main Material

Aluminum & Glass

Color Temperature

3000K / 4000K / 6500K

CRI ≥90

Power Factor ≥0.55

Working Temperature -10°C~45°C

Beam Angle (Optional) 110°

Fixture Dimmable Non-dimmable

Electrical

Protection class IP20



Product Model No. AP-KD-0130A-5W

Packaging Detail 35×35×46.5cm



STD PKG 36pcs

N.W 9.9kgs


G.W 13.8kgs

AP-KD-0130A-5W


5WDC150mALED 3000KDC8.5-40VDC229lm / incl./ PRI:- ELECTRONIC220-240 V~50/60HzSEC:0.11AConstant Current:



Warm White 3000K ∠ 110°

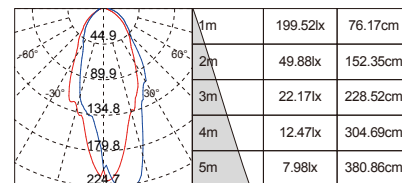

cd Height illuminance Diameter

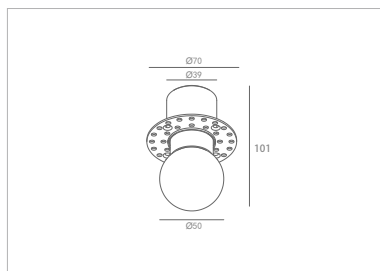

Especially designed for:

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.



Various Brand of COB LED Light Source:



Product series

AP-SPT551-7W



RECESSED LED SPOT LIGHT

TECHNICAL SPECIFICATIONS

Input (Optional) 220-240V~50/60 Hz

Maximum Wattage 7W±10% Max

Number of LEDs

1 LEDs COB

Luminous Flux

550LM (3000K)

Main Material

Die-casting Aluminum

Color Temperature

3000K / 4000K / 6500K

CRI ≥80

Power Factor ≥0.5

Working Temperature -10°C~45°C

Beam Angle (Optional) 18°

Fixture Dimmable Non-dimmable

Electrical

Protection class IP20



Product Model No. AP-SPT551-7W

Packaging Detail 52×41.2×40cm



STD PKG 80pcs

N.W 15.9kgs

G.W 17.4kgs

AP-SPT551-7W


DC120mA7W BridgeluxDC30-42VLED(COB)DC

3000K/ PRI: 220-240V50/60-Hz 0.06A


Driver SEC: Constant Current:



Warm White 3000K ∠ 18°

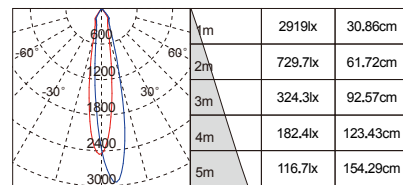

cd Height illuminance Diameter



Especially designed for:

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.



Various Brand of COB LED Light Source:



RECESSED LED SPOT LIGHT

TECHNICAL SPECIFICATIONS	
Input (Optional)	220-240V~50/60 Hz
Maximum Wattage	10W±10% Max


Number of LEDs
1 LEDs COB

Luminous Flux
900LM (3000K)

Main Material
Die-casting Aluminum

Color Temperature
3000K / 4000K / 6500K

CRI	≥80
Power Factor	≥0.9
Working Temperature	-10°C~45°C
Beam Angle (Optional)	25°
Fixture Dimmable	Non-dimmable
Electrical	External Driver
Protection class	IP20

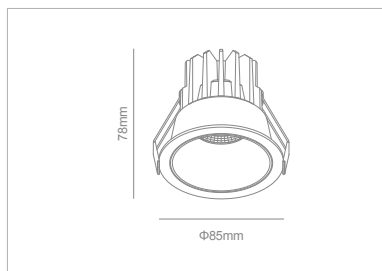

Especially designed for:

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.



Product Model No.	AP-SPT551-10W	
Packaging Detail	54.5×33.5×44cm	
	STD PKG	60pcs
	N.W	17.4kgs
	G.W	18.9kgs

AP-SPT551-10W

DC250mA10W BridgeluxDC30-42VLED(COB)DC /

3000KPRI: 220-240V0.12A

Driver SEC: Constant Current:



Warm White 3000K ∠ 25°

	1m	2347lx	44.11cm
	2m	586.7lx	88.22cm
	3m	260.8lx	132.32cm
	4m	146.7lx	176.43cm
	5m	93.87lx	220.54cm
	cd	Height	illuminance Diameter

Various Brand of COB LED Light Source:





Product series

AP-SPT553-7W



RECESSED LED SPOT LIGHT

TECHNICAL SPECIFICATIONS

Input (Optional) 220-240V~50/60 Hz

Maximum Wattage 7W±10% Max

Number of LEDs

1 LEDs COB

Luminous Flux

600LM (3000K)

Main Material

Die-casting Aluminum

Color Temperature

3000K / 4000K / 6500K

CRI ≥80

Power Factor ≥0.5

Working Temperature -10°C~45°C

Beam Angle (Optional) 17°

Fixture Dimmable Non-dimmable

Electrical

Protection class IP20



Product Model No. AP-SPT553-7W

Packaging Detail 52×41.2×40cm



STD PKG 80pcs

N.W 15.9kgs

G.W 17.4kgs

AP-SPT553-7W


DC120mA7W BridgeluxDC30-42VDCLED(COB)

/3000KPRI: 220-240V600lm /V~incl.50/60-Hz 0.06A


Driver SEC: Constant Current:



Warm White 3000K ∠ 17°

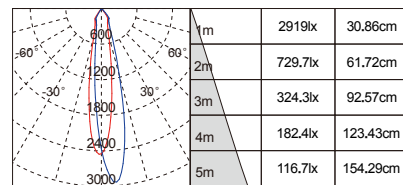

cd Height illuminance Diameter



Especially designed for:

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.



Option colors



Various Brand of COB LED Light Source:



RECESSED LED SPOT LIGHT

TECHNICAL SPECIFICATIONS

Input (Optional)	220-240V~50/60 Hz
Maximum Wattage	10W±10% Max


Number of LEDs
1 LEDs COB

Luminous Flux
950LM (3000K)

Main Material
Die-casting Aluminum

Color Temperature
3000K / 4000K / 6500K

CRI	≥80
Power Factor	≥0.9
Working Temperature	-10°C~45°C
Beam Angle (Optional)	24°
Fixture Dimmable	Non-dimmable
Electrical	External Driver
Protection class	IP20

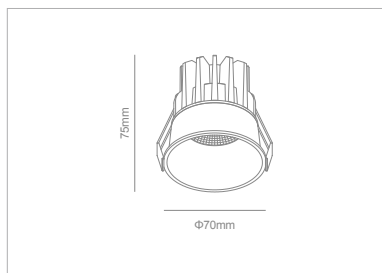

Especially designed for:

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.



Product Model No.	AP-SPT553-10W	
Packaging Detail	54.5×33.5×44cm	
	STD PKG	60pcs
	N.W	17.4kgs
	G.W	18.9kgs

AP-SPT553-10W

DC250mA10W BridgeluxDC30-42VLED(COB)DC /

3000KPRI: 220-240V50Hz V~/ incl.50/60-Hz 0.12A

Driver SEC: Constant Current:




Warm White 3000K ∠ 24°

1m	2347lx	44.11cm
2m	586.7lx	88.22cm
3m	260.8lx	132.32cm
4m	146.7lx	176.43cm
5m	93.87lx	220.54cm

cd	Height	illuminance	Diameter
----	--------	-------------	----------

Option colors



Various Brand of COB LED Light Source:



Product series

AP-SPT554-7W



RECESSED LED SPOT LIGHT

TECHNICAL SPECIFICATIONS

Input (Optional) 220-240V~50/60 Hz

Maximum Wattage 7W±10% Max

Number of LEDs

1 LEDs COB

Luminous Flux

550LM (3000K)

Main Material

Die-casting Aluminum

Color Temperature

3000K / 4000K / 6500K

CRI ≥80

Power Factor ≥0.5


Working Temperature -10°C~45°C

Beam Angle (Optional) 18°

Fixture Dimmable Non-dimmable

Electrical

Protection class IP20



Product Model No. AP-SPT554-7W

Packaging Detail 52×41.2×40cm



STD PKG 80pcs

N.W 13.95kgs

G.W 18kgs

AP-SPT554-7W


DC120mA7W BridgeluxDC30-42VDCLED(COB)

/3000KPRI: 220-240550lm /V~incl.50/60-Hz 0.06A

Driver SEC: Constant Current:



Warm White 3000K ∠ 18°

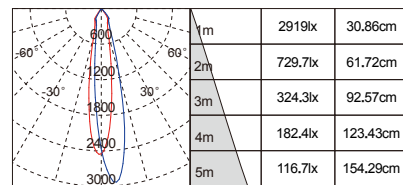

cd Height illuminance Diameter

Especially designed for:

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.



Various Brand of COB LED Light Source:



RECESSED LED SPOT LIGHT

TECHNICAL SPECIFICATIONS

Input (Optional) 220-240V~50/60 Hz

Maximum Wattage 10W±10% Max

Number of LEDs

1 LEDs COB

Luminous Flux

900LM (3000K)

Main Material

Die-casting Aluminum

Color Temperature

3000K / 4000K / 6500K

CRI ≥80

Power Factor ≥0.9


Working Temperature -10°C~45°C

Beam Angle (Optional) 25°

Fixture Dimmable Non-dimmable

Electrical

Protection class IP20



Product Model No. AP-SPT554-10W

Packaging Detail 54.5×33.5×44cm



STD PKG 60pcs

N.W 15.45kgs

G.W 19kgs

AP-SPT554-7W


DC120mA7W BridgeluxDC30-42VDCLED(COB)

/3000KPRI: 220-240550lm /V~incl.50/60-Hz 0.06A

Driver SEC: Constant Current:



Warm White 3000K ∠ 25°

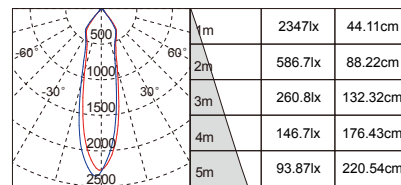

cd Height illuminance Diameter

Especially designed for:

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.



Various Brand of COB LED Light Source:



RECESSED LED SPOT LIGHT

TECHNICAL SPECIFICATIONS

Input (Optional) 220-240V~50/60 Hz

Maximum Wattage 12W±10% Max

Number of LEDs

1 LEDs COB

Luminous Flux

1300LM (3000K)

Main Material

Die-casting Aluminum

Color Temperature

3000K / 4000K / 6500K

CRI ≥80

Power Factor ≥0.9


Working Temperature -10°C~45°C

Beam Angle (Optional) 18°

Fixture Dimmable Non-dimmable

Electrical

Protection class IP20



Product Model No. AP-SPT554-12W

Packaging Detail 57×25×44cm



STD PKG 40pcs

N.W 15.2kgs

G.W 18.3kgs


AP-SPT554-12W

12W Current: Bridgelux DC300mA LED (COB) DC30-42V DC3000K

/1300lm PFI: 220-240/ incl. -V~ 50/60 Hz 0.07A



Warm White 3000K ∠18°

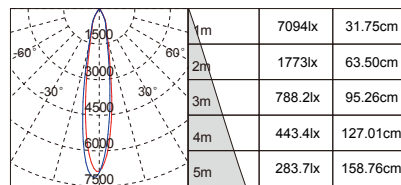

cd Height illuminance Diameter

Especially designed for:

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.



Various Brand of COB LED Light Source:



Product series

AP-SPT555-7W



RECESSED LED SPOT LIGHT

TECHNICAL SPECIFICATIONS

Input (Optional) 220-240V~50/60 Hz

Maximum Wattage 7W±10% Max

Number of LEDs

1 LEDs COB

Luminous Flux

550LM (3000K)

Main Material

Die-casting Aluminum

Color Temperature

3000K / 4000K / 6500K

CRI ≥80

Power Factor ≥0.5


Working Temperature -10°C~45°C

Beam Angle (Optional) 18°

Fixture Dimmable Non-dimmable

Electrical

Protection class IP20



Especially designed for:

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.



Product Model No. AP-SPT555-7W

Packaging Detail 52×41.2×40cm



STD PKG 80pcs

N.W 12.85kgs


G.W 17.5kgs

AP-SPT554-7W

DC120mA7W BridgeluxDC30-42VDCLED(COB) /3000KPRI: 220-240550lm
V~incl.50/60-Hz 0.06A



Warm White 3000K ∠ 18°

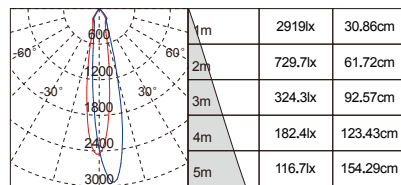

cd Height illuminance Diameter

Option colors



Various Brand of COB LED Light Source:



RECESSED LED SPOT LIGHT

TECHNICAL SPECIFICATIONS

Input (Optional)	220-240V~50/60 Hz
Maximum Wattage	10W±10% Max


Number of LEDs
1 LEDs COB

Luminous Flux
950LM (3000K)

Main Material
Die-casting Aluminum

Color Temperature
3000K / 4000K / 6500K

CRI	≥80
Power Factor	≥0.9
Working Temperature	-10°C~45°C
Beam Angle (Optional)	25°
Fixture Dimmable	Non-dimmable
Electrical	External Driver
Protection class	IP20

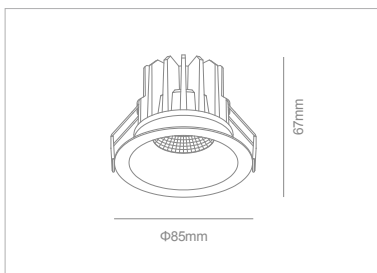

Especially designed for:

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.



Product Model No.	AP-SPT555-10W	
Packaging Detail	54.5×33.5×44cm	
	STD PKG	60pcs
	N.W	14.1kgs
	G.W	17.7kgs

AP-SPT555-10W

DC250mA10W BridgeluxDC30-42VDCLED(COB)/

PRI:3000K220-240V50lmV~/ incl.50/60-Hz 0.12A


Driver SEC: Constant Current:



Warm White 3000K ∠ 25°

	1m	2347lx	44.11cm
	2m	586.7lx	88.22cm
	3m	260.8lx	132.32cm
	4m	146.7lx	176.43cm
	5m	93.87lx	220.54cm
cd	Height	illuminance	Diameter

Option colors



Various Brand of COB LED Light Source:



RECESSED LED SPOT LIGHT

TECHNICAL SPECIFICATIONS

Input (Optional)	220-240V~50/60 Hz
Maximum Wattage	12W±10% Max

Number of LEDs

1 LEDs COB

Luminous Flux

1300LM (3000K)

Main Material

Die-casting Aluminum

Color Temperature

3000K / 4000K / 6500K

CRI ≥80

Power Factor ≥0.9


Working Temperature -10°C~45°C

Beam Angle (Optional) 18°

Fixture Dimmable Non-dimmable

Electrical External Driver

Protection class IP20



Product Model No.	AP-SPT555-12W	
Packaging Detail	57×25×44cm	
	STD PKG	40pcs
	N.W	14.55kgs
	G.W	17.6kgs

AP-SPT555-12W


12W Current: Bridgelux DC300mA LED(COB) DC30-42VDC 3000K / 1300lm PRI: 220-240/ incl. -V~ 50/60 Hz 0.07A



Warm White 3000K ∠18°

	1m	7094lx	31.75cm
	2m	1773lx	63.50cm
	3m	788.2lx	95.26cm
	4m	443.4lx	127.01cm
	5m	283.7lx	158.76cm
	cd	Height	illuminance Diameter

Option colors



Especially designed for:

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.



Various Brand of COB LED Light Source:



Product series

AP-SPT556-7W



RECESSED LED SPOT LIGHT

TECHNICAL SPECIFICATIONS	
Input (Optional)	220-240V~50/60 Hz
Maximum Wattage	7W±10% Max


Number of LEDs	
1 LEDs COB	

Luminous Flux	
550LM (3000K)	

Main Material	
Die-casting Aluminum	

Color Temperature	
3000K / 4000K / 6500K	

CRI	≥80
Power Factor	≥0.5
Working Temperature	-10°C~45°C
Beam Angle (Optional)	18°
Fixture Dimmable	Non-dimmable
Electrical	External Driver
Protection class	IP20

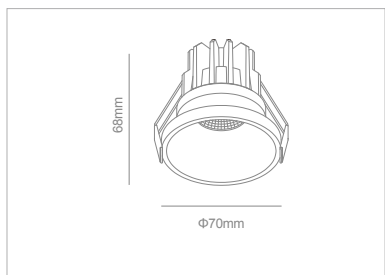

Product Model No.	AP-SPT556-7W	
Packaging Detail	52×41.2×40cm	
	STD PKG	80pcs
	N.W	15.35kgs
	G.W	19.5kgs

AP-SPT556-7W

7W Bridgelux LED(COB) 3000K 550lm / incl. - Driver SEC: Constant Current:
DC170mA DC30-42VDC / PRI: 220-240 V~ 50/60 Hz 0.08A



Warm White 3000K ∠ 18°

	1m	2919lx	30.86cm
	2m	729.7lx	61.72cm
	3m	324.3lx	92.57cm
	4m	182.4lx	123.43cm
	5m	116.7lx	154.29cm
cd	Height	illuminance	Diameter

Especially designed for:

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.



Various Brand of COB LED Light Source:

OSRAM	PHILIPS	LUMENS	EPISTAR	CITIZEN	LUMINUS	DISON	SAMSUNG	BRIDGELUX	LG
-------	---------	--------	---------	---------	---------	-------	---------	-----------	----

RECESSED LED SPOT LIGHT

TECHNICAL SPECIFICATIONS	
Input (Optional)	220-240V~50/60 Hz
Maximum Wattage	10W±10% Max


Number of LEDs
1 LEDs COB

Luminous Flux
950LM (3000K)

Main Material
Die-casting Aluminum

Color Temperature
3000K / 4000K / 6500K

CRI	≥80
Power Factor	≥0.9
Working Temperature	-10°C~45°C
Beam Angle (Optional)	25°
Fixture Dimmable	Non-dimmable
Electrical	External Driver
Protection class	IP20

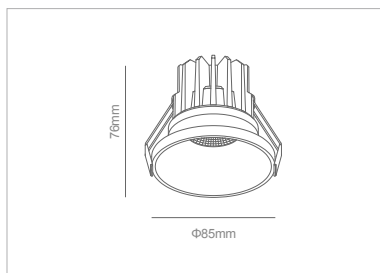

Especially designed for:

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.



Product Model No.	AP-SPT556-10W	
Packaging Detail	54.5×33.5×44cm	
	STD PKG	60pcs
	N.W	15.2kgs
	G.W	18.8kgs

AP-SPT556-10W

DC250mA10W BridgeluxDC30-42VDCLED(COB)/

PRI:3000K220-240V50/60-Hz 0.12A

Driver SEC: Constant Current:



Warm White 3000K ∠ 25°

	1m	2347lx	44.11cm
	2m	586.7lx	88.22cm
	3m	260.8lx	132.32cm
	4m	146.7lx	176.43cm
	5m	93.87lx	220.54cm
	cd	Height	illuminance Diameter


Various Brand of COB LED Light Source:



RECESSED LED SPOT LIGHT

TECHNICAL SPECIFICATIONS	
Input (Optional)	220-240V~50/60 Hz
Maximum Wattage	12W±10% Max
Number of LEDs	
1 LEDs COB	
Luminous Flux	
1300LM (3000K)	
Main Material	
Die-casting Aluminum	
Color Temperature	
3000K / 4000K / 6500K	

CRI	≥80
Power Factor	≥0.9
Working Temperature	-10°C~45°C
Beam Angle (Optional)	18°
Fixture Dimmable	Non-dimmable
Electrical	External Driver
Protection class	IP20

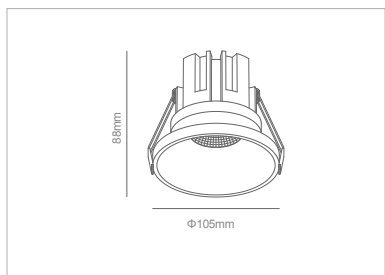

Especially designed for:

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.



Product Model No.	AP-SPT556-12W	
Packaging Detail	57×25×44cm	
	STD PKG	40pcs
	N.W	16kgs
	G.W	19kgs

AP-SPT556-12W

12WCurrent:BridgeluxDC300mALED(COB)DC30-42VDC3000K /1300lmPRI: 220-240/ incl. -V~50/60 Hz 0.07A



Warm White 3000K ∠18°

	1m	7094lx	31.75cm
	2m	1773lx	63.50cm
	3m	788.2lx	95.26cm
	4m	443.4lx	127.01cm
	5m	283.7lx	158.76cm
cd	Height	illuminance	Diameter

Various Brand of COB LED Light Source:



Product series

AP-SPT557-7W



RECESSED LED
SPOT LIGHT

TECHNICAL SPECIFICATIONS

Input (Optional)	220-240V~50/60 Hz
Maximum Wattage	7W±10% Max

Number of LEDs

1 LEDs COB

Luminous Flux

550LM (3000K)

Main Material

Die-casting Aluminum

Color Temperature

3000K / 4000K / 6500K

CRI ≥80

Power Factor ≥0.5


Working Temperature -10°C~45°C

Beam Angle (Optional) 18°

Fixture Dimmable Non-dimmable


Electrical

Protection class IP20



Especially designed for:

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.

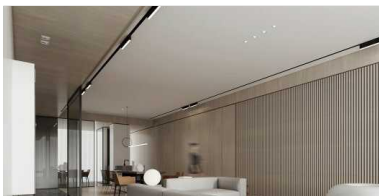

Product Model No.	AP-SPT556-7W	
Packaging Detail	52×41.2×40cm	
	STD PKG	80pcs
	N.W	13.9kgs
	G.W	18kgs

AP-SPT556-7W

7W Bridgelux LED(COB) 3000K 550lm / incl. - Driver SEC: Constant Current:
DC170mA DC30-42VDC / PRI: 220-240 V~ 50/60 Hz 0.08A




Warm White 3000K ∠ 18°

1m	2919lx	30.86cm
2m	729.7lx	61.72cm
3m	324.3lx	92.57cm
4m	182.4lx	123.43cm
5m	116.7lx	154.29cm

cd Height illuminance Diameter

Option colors



Various Brand of COB LED Light Source:



RECESSED LED SPOT LIGHT

TECHNICAL SPECIFICATIONS

Input (Optional)	220-240V~50/60 Hz
Maximum Wattage	10W±10% Max

Number of LEDs

1 LEDs COB

Luminous Flux

900LM (3000K)

Main Material

Die-casting Aluminum

Color Temperature

3000K / 4000K / 6500K

CRI ≥80

Power Factor ≥0.9


Working Temperature -10°C~45°C

Beam Angle (Optional) 25°

Fixture Dimmable Non-dimmable

Electrical External Driver

Protection class IP20



Especially designed for:

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.



Product Model No.	AP-SPT556-10W	
Packaging Detail	54.5×33.5×44cm	
	STD PKG	60pcs
	N.W	15.15kgs
	G.W	18.7kgs

AP-SPT556-10W

DC250mA10W BridgeluxDC30-42VDCLED(COB)/

PRI:3000K220-240V900lmV~/ incl.50/60-Hz 0.12A


Driver SEC: Constant Current:



Warm White 3000K ∠ 25°

	1m	2347lx	44.11cm
	2m	586.7lx	88.22cm
	3m	260.8lx	132.32cm
	4m	146.7lx	176.43cm
	5m	93.87lx	220.54cm
cd		Height	illuminance Diameter

Option colors



Various Brand of COB LED Light Source:



RECESSED LED SPOT LIGHT

TECHNICAL SPECIFICATIONS

Input (Optional)	220-240V~50/60 Hz
Maximum Wattage	12W±10% Max


Number of LEDs
1 LEDs COB

Luminous Flux
1300LM (3000K)

Main Material
Die-casting Aluminum

Color Temperature
3000K / 4000K / 6500K

CRI	≥80
Power Factor	≥0.9
Working Temperature	-10°C~45°C
Beam Angle (Optional)	18°
Fixture Dimmable	Non-dimmable
Electrical	External Driver
Protection class	IP20



Especially designed for:

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.



Product Model No.	AP-SPT556-12W	
Packaging Detail	58×30×44cm	
	STD PKG	40pcs
	N.W	12.95kgs
	G.W	16.3kgs

AP-SPT556-12W

12W Current: Bridgelux DC300mA LED (COB) DC30-42VDC 3000K


/1300lm PRI: 220-240/ incl. -V~ 50/60 Hz 0.07A



Warm White 3000K ∠18°

	1m	7094lx	31.75cm
	2m	1773lx	63.50cm
	3m	788.2lx	95.26cm
	4m	443.4lx	127.01cm
	5m	283.7lx	158.76cm
cd	Height	illuminance	Diameter

Option colors



Various Brand of COB LED Light Source:



Product series

AP-SPT559-7W



RECESSED LED SPOT LIGHT

TECHNICAL SPECIFICATIONS

Input (Optional) 220-240V~50/60 Hz

Maximum Wattage 7W±10% Max

Number of LEDs

1 LEDs COB

Luminous Flux

550LM (3000K)

Main Material

Die-casting Aluminum

Color Temperature

3000K / 4000K / 6500K

CRI ≥80

Power Factor ≥0.5

Working Temperature -10°C~45°C

Beam Angle (Optional) 18°

Fixture Dimmable Non-dimmable

Electrical Philips External Driver

Protection class IP20



Product Model No. AP-SPT559-7W

Packaging Detail 52×41.2×40cm



STD PKG 80pcs

N.W 15.35kgs


G.W 19.5kgs

AP-SPT559-7W


7W Bridgelux LED(COB) 3000K 550lm / incl. PHILIPS Driver 220-240 V~ 50/60 Hz



Warm White 3000K ∠ 18°

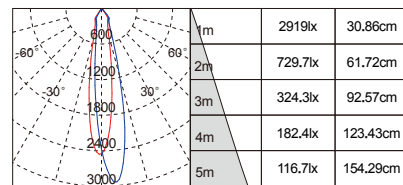

cd Height illuminance Diameter




Option colors



Especially designed for:

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.

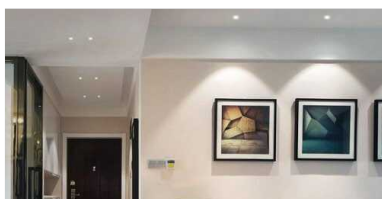

Various Brand of COB LED Light Source:



RECESSED LED SPOT LIGHT

TECHNICAL SPECIFICATIONS

Input (Optional) 220-240V~50/60 Hz

Maximum Wattage 10W±10% Max

Number of LEDs

1 LEDs COB

Luminous Flux

950LM (3000K)

Main Material

Die-casting Aluminum

Color Temperature

3000K / 4000K / 6500K

CRI ≥80

Power Factor ≥0.9


Working Temperature -10°C~45°C

Beam Angle (Optional) 25°

Fixture Dimmable Non-dimmable


Electrical Philips External Driver

Protection class IP20

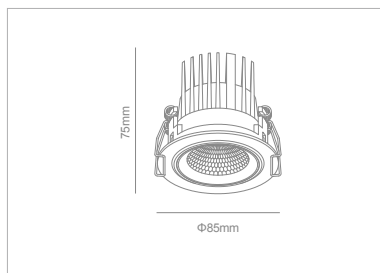

Especially designed for:

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.

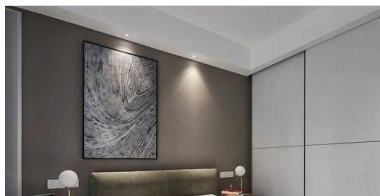

Product Model No. AP-SPT559-10W

Packaging Detail 54.5×33.5×44cm



STD PKG 60pcs

N.W 15.2kgs


G.W 18.8kgs

AP-SPT559-10W

10W Bridgelux LED(COB) 3000K 950lm / incl. PHILIPS Driver 220-240 V~ 50/60 Hz



Warm White 3000K ∠ 25°

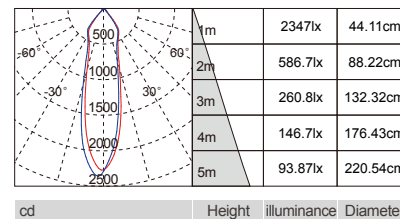

Option colors



Various Brand of COB LED Light Source:





Product series

AP-SPT560-7W



RECESSED LED SPOT LIGHT

TECHNICAL SPECIFICATIONS

Input (Optional) 220-240V~50/60 Hz

Maximum Wattage 7W±10% Max

Number of LEDs

1 LEDs COB

Luminous Flux

595LM (3000K)

Main Material

Die-casting Aluminum

Color Temperature

3000K / 4000K / 6500K

CRI ≥80

Power Factor ≥0.8


Working Temperature -10°C~45°C

Beam Angle (Optional) 36°

Fixture Dimmable Non-dimmable

Electrical

Protection class IP20



Product Model No. AP-SPT560-7W

Packaging Detail 54.5×40×32.6cm



STD PKG 60pcs

N.W 15.21kgs

G.W 18.4kgs

AP-SPT560-7W


DC170mA7W BridgeluxDC30-42VDCLED(COB)

/3000KPRI: 220-240V595lm /V~incl.50/60-Hz 0.05A


Driver SEC: Constant Current:



Warm White 3000K ∠ 36°

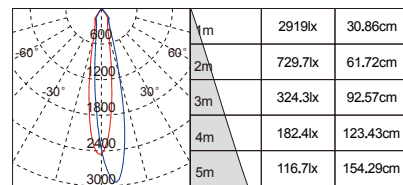

cd Height Illuminance Diameter

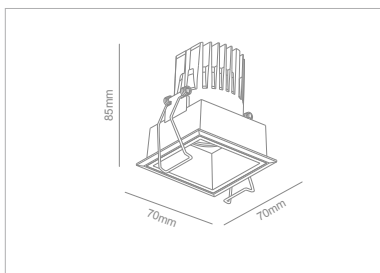

Especially designed for:

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.



Option colors



Various Brand of COB LED Light Source:



RECESSED LED SPOT LIGHT

TECHNICAL SPECIFICATIONS

Input (Optional) 220-240V~50/60 Hz

Maximum Wattage 2×7W±10% Max

Number of LEDs

2 LEDs COB

Luminous Flux

1120LM (3000K)

Main Material

Die-casting Aluminum

Color Temperature

3000K / 4000K / 6500K

CRI ≥80

Power Factor ≥0.9


Working Temperature -10°C~45°C

Beam Angle (Optional) 36°

Fixture Dimmable Non-dimmable

Electrical External Driver

Protection class IP20



Especially designed for:

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.



Product Model No. AP-SPT560-2×7W

Packaging Detail 44×33×43cm



STD PKG 32pcs

N.W 14kgs


G.W 17kgs

AP-SPT560-2×7W

2×7W Bridgelux LED(COB) 3000K 1120lm / incl. MEGALUX Driver SEC: Constant Current: DC170mA DC30-42VDC / PRI: 220-240 V~ 50/60 Hz 0.05A



Warm White 3000K ∠ 36°

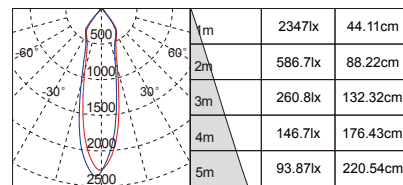

cd Height illuminance Diameter

Option colors



Various Brand of COB LED Light Source:



RECESSED LED SPOT LIGHT

TECHNICAL SPECIFICATIONS

Input (Optional)	220-240V~50/60 Hz
Maximum Wattage	3×7W±10% Max


Number of LEDs
3 LEDs COB

Luminous Flux
1680LM (3000K)

Main Material
Die-casting Aluminum

Color Temperature
3000K / 4000K / 6500K

CRI	≥80
Power Factor	≥0.9
Working Temperature	-10°C~45°C
Beam Angle (Optional)	36°
Fixture Dimmable	Non-dimmable
Electrical	External Driver
Protection class	IP20

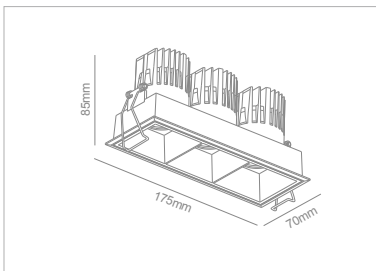

Especially designed for:

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.



Product Model No.	AP-SPT560-3×7W	
Packaging Detail	43×40×32.5cm	
	STD PKG	24pcs
	N.W	15.8kgs
	G.W	18.5kgs

AP-SPT560-3×7W

3×7W Current: Bridgelux DC170mA LED(COB) DC30-42VDC 3000K/ PRI: 1680lm 220-240/ incl. V~ Driver 50/60 SEC: Hz 0.05A Constant



Warm White 3000K ∠36°

	1m	7094lx	31.75cm
	2m	1773lx	63.50cm
	3m	788.2lx	95.26cm
	4m	443.4lx	127.01cm
	5m	283.7lx	158.76cm
	cd	Height	illuminance Diameter

Option colors



Various Brand of COB LED Light Source:





RECESSED LED SPOT LIGHT

TECHNICAL SPECIFICATIONS

Input (Optional)	220-240V~50/60 Hz
Maximum Wattage	10W±10% Max


Number of LEDs
1 LEDs COB

Luminous Flux
700LM (3000K)

Main Material
Die-casting Aluminum


Color Temperature
3000K / 4000K / 6500K

CRI	≥80
Power Factor	≥0.9
Working Temperature	-10°C~45°C
Beam Angle (Optional)	36°
Fixture Dimmable	Non-dimmable
Electrical	External Driver
Protection class	IP20



Especially designed for:

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.



Product Model No.	AP-SPT560-10W	
Packaging Detail	57×25×38cm	
	STD PKG	60pcs
	N.W	11.85kgs
	G.W	14.5kgs

AP-SPT560-10W


DC250mA10W BrigeluxDC30-42VDCLED(COB)/

PRI:3000K220-240V00lmV~/ incl.50/60-Hz 0.065A

Driver SEC: Constant Current:



Warm White 3000K ∠ 36°

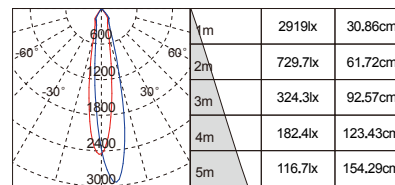

cd Height illuminance Diameter

Option colors



Various Brand of COB LED Light Source:



RECESSED LED SPOT LIGHT

TECHNICAL SPECIFICATIONS

Input (Optional)	220-240V~50/60 Hz
Maximum Wattage	2×10W±10% Max

Number of LEDs
2 LEDs COB

Luminous Flux
1600LM (3000K)

Main Material
Die-casting Aluminum

Color Temperature
3000K / 4000K / 6500K

CRI	≥80
------------	-----

Power Factor	≥0.9
---------------------	------


Working Temperature	-10°C~45°C
----------------------------	------------

Beam Angle (Optional)	36°
------------------------------	-----

Fixture Dimmable	Non-dimmable
-------------------------	--------------

Electrical	External Driver
-------------------	-----------------

Protection class	IP20
-------------------------	------

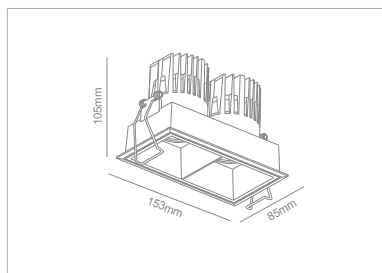

Especially designed for:

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.



Product Model No.	AP-SPT560-2×10W	
Packaging Detail 	44×33×43cm	
	STD PKG	32pcs
	N.W	14kgs
	G.W	17kgs

AP-SPT560-2×10W

Current:2×10W

BridgeluxDC250mALED(COB)DC30-42VDC3000K/

PRI:1600lm220-240/ incl.V~50/60 Hz 0.065A

Driver SEC: Constant



Warm White 3000K ∠ 36°

	1m	2347lx	44.11cm
	2m	586.7lx	88.22cm
	3m	260.8lx	132.32cm
	4m	146.7lx	176.43cm
	5m	93.87lx	220.54cm
	cd	Height	illuminance Diameter

Option colors



Various Brand of COB LED Light Source:



RECESSED LED SPOT LIGHT

TECHNICAL SPECIFICATIONS

Input (Optional)	220-240V~50/60 Hz
Maximum Wattage	3×7W±10% Max


Number of LEDs
3 LEDs COB

Luminous Flux
2400LM (3000K)

Main Material
Die-casting Aluminum

Color Temperature
3000K / 4000K / 6500K

CRI	≥80
Power Factor	≥0.9
Working Temperature	-10°C~45°C
Beam Angle (Optional)	36°
Fixture Dimmable	Non-dimmable
Electrical	External Driver
Protection class	IP20

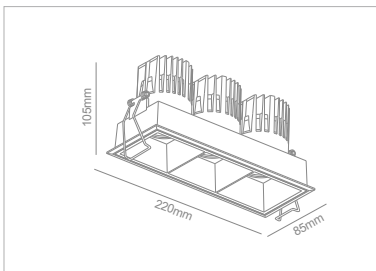

Especially designed for:

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.



Product Model No.	AP-SPT560-3×10W	
Packaging Detail	43×40×32.5cm	
	STD PKG	24pcs
	N.W	15.8kgs
	G.W	18.5kgs

AP-SPT560-3×10W

Current: 3×10W

BridgeluxDC250mALED(COB)DC30-42VDC3000K/

PRI:2400lm220-240/ incl.V~50/60 Hz 0.065A

Driver SEC: Constant



Warm White 3000K ∠36°

	1m	7094lx	31.75cm
	2m	1773lx	63.50cm
	3m	788.2lx	95.26cm
	4m	443.4lx	127.01cm
	5m	283.7lx	158.76cm
cd	Height	illuminance	Diameter

Option colors



Various Brand of COB LED Light Source:



Product series

AP-SPT563-7W



RECESSED LED SPOT LIGHT

TECHNICAL SPECIFICATIONS

Input (Optional) 220-240V~50/60 Hz

Maximum Wattage 7W±10% Max

Number of LEDs

1 LEDs COB

Luminous Flux

550LM (3000K)

Main Material

Die-casting Aluminum

Color Temperature

3000K / 4000K / 6500K

CRI ≥80

Power Factor ≥0.5


Working Temperature -10°C~45°C

Beam Angle (Optional) 18°

Fixture Dimmable Non-dimmable

Electrical

Protection class IP20



Especially designed for:

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.



Product Model No. AP-SPT563-7W

Packaging Detail 52×41.2×40cm



STD PKG 80pcs

N.W 14.4kgs

G.W 18.5kgs


AP-SPT563-7W

7W Bridgelux LED(COB) 3000K 550lm / incl. - Driver SEC: Constant Current:

DC170mA DC30-42VDC / PRI: 220-240 V~ 50/60 Hz 0.08A




Warm White 3000K ∠ 18°

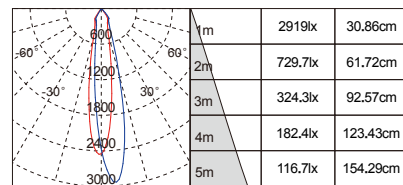

cd Height illuminance Diameter

Option colors



Various Brand of COB LED Light Source:



RECESSED LED SPOT LIGHT

TECHNICAL SPECIFICATIONS

Input (Optional)	220-240V~50/60 Hz
Maximum Wattage	10W±10% Max


Number of LEDs
1 LEDs COB

Luminous Flux
900LM (3000K)

Main Material
Die-casting Aluminum

Color Temperature
3000K / 4000K / 6500K

CRI	≥80
Power Factor	≥0.9
Working Temperature	-10°C~45°C
Beam Angle (Optional)	25°
Fixture Dimmable	Non-dimmable
Electrical	External Driver
Protection class	IP20

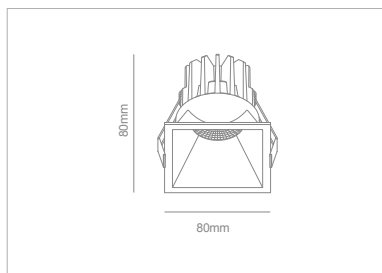

Especially designed for:

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.



Product Model No.	AP-SPT563-10W	
Packaging Detail	54.5×33.5×44cm	
	STD PKG	60pcs
	N.W	15.95kgs
	G.W	19.5kgs

AP-SPT563-10W

DC250mA10W BridgeluxDC30-42VDCLED(COB)/

PRI:3000K220-240V0.12A


Driver SEC: Constant Current:



Warm White 3000K ∠ 25°


	1m	2347lx	44.11cm
	2m	586.7lx	88.22cm
	3m	260.8lx	132.32cm
	4m	146.7lx	176.43cm
	5m	93.87lx	220.54cm
	cd	Height	illuminance Diameter

Option colors



Various Brand of COB LED Light Source:



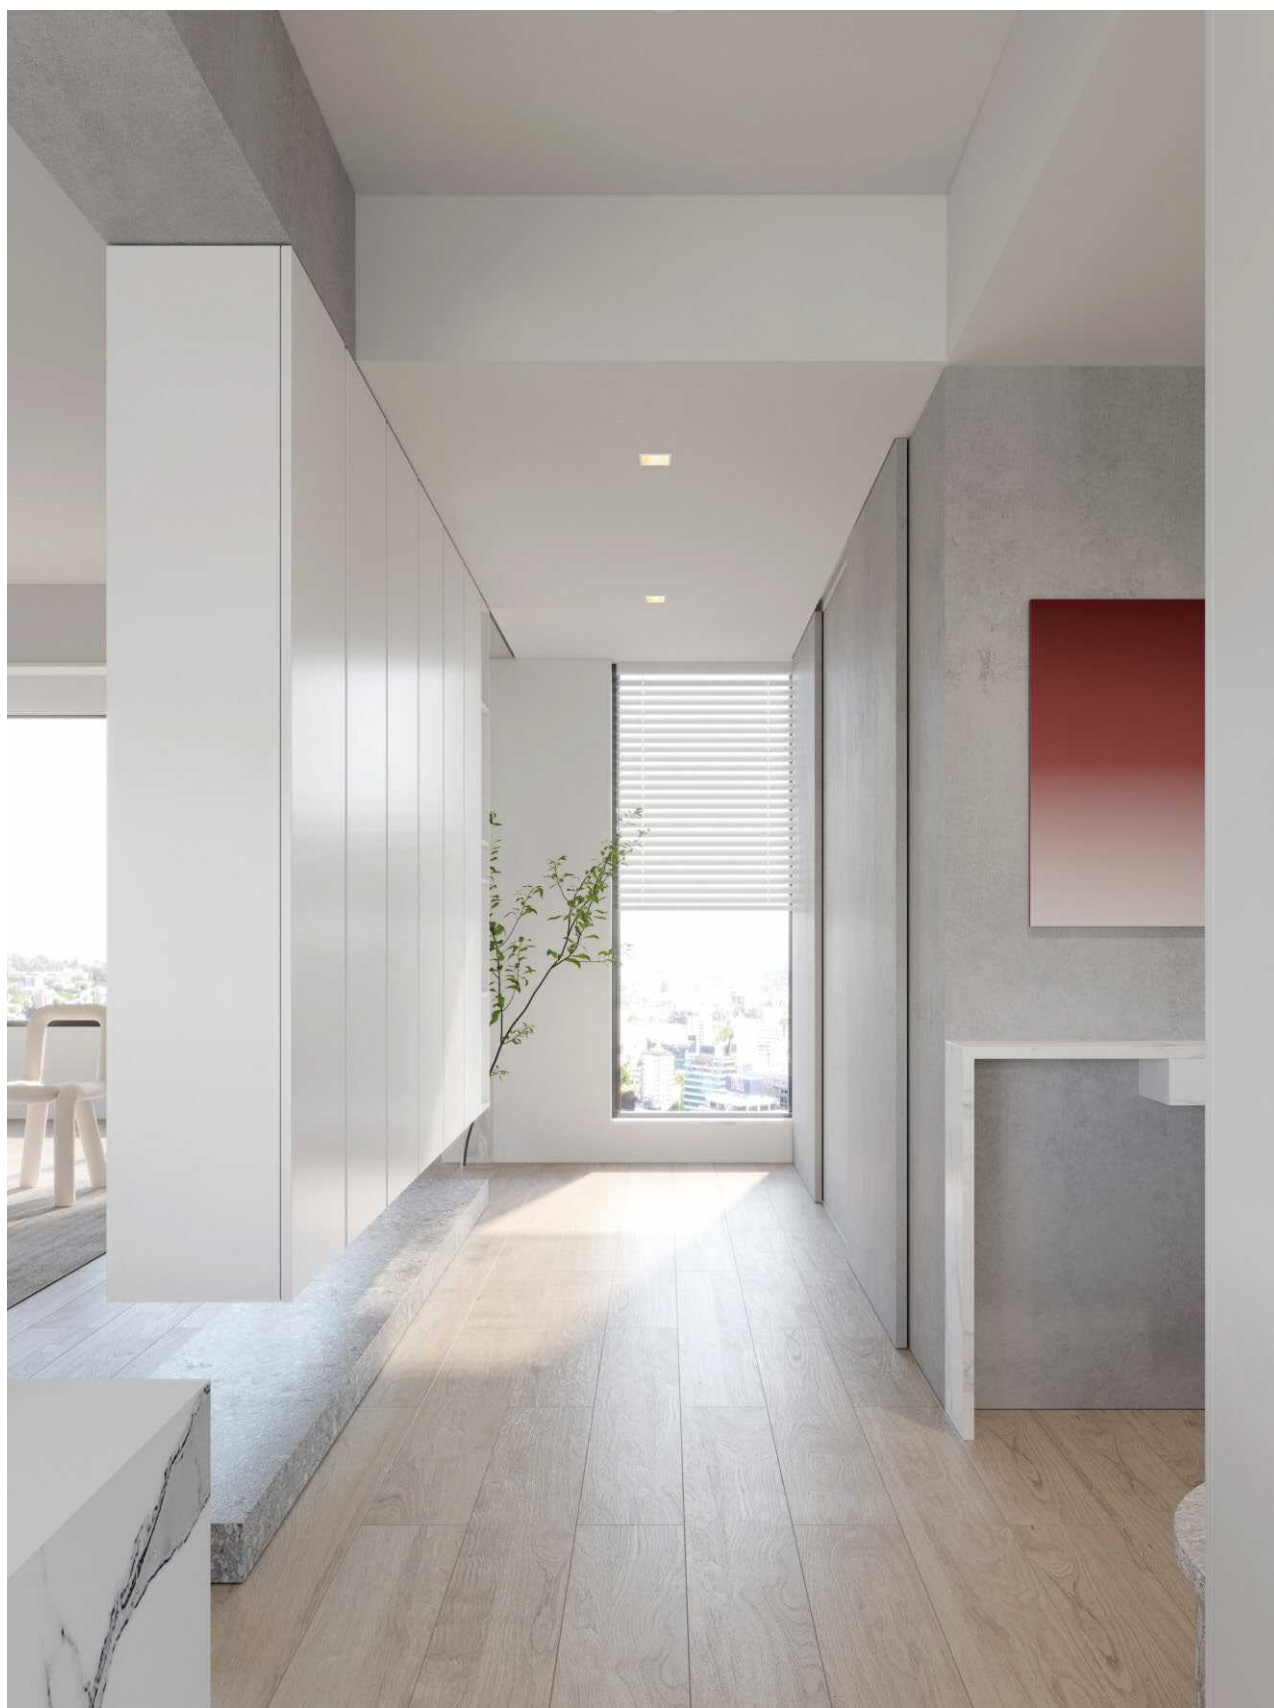

Product series

AP-SPT564-7W



RECESSED LED SPOT LIGHT

TECHNICAL SPECIFICATIONS

Input (Optional)	220-240V~50/60 Hz
Maximum Wattage	7W±10% Max

Number of LEDs

1 LEDs COB

Luminous Flux

550LM (3000K)

Main Material

Die-casting Aluminum

Color Temperature

3000K / 4000K / 6500K

CRI ≥80

Power Factor ≥0.5


Working Temperature -10°C~45°C

Beam Angle (Optional) 18°

Fixture Dimmable Non-dimmable

Electrical External Driver

Protection class IP20



Especially designed for:

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.



Product Model No.	AP-SPT564-7W	
Packaging Detail	52×41.2×40cm	
	STD PKG	80pcs
	N.W	12.6kgs
	G.W	16.5kgs


AP-SPT564-7W

7W Bridgelux LED(COB) 3000K 550lm / incl. - Driver SEC: Constant Current:

DC170mA DC30-42VDC / PRI: 220-240 V~ 50/60 Hz 0.08A



Warm White 3000K ∠ 18°

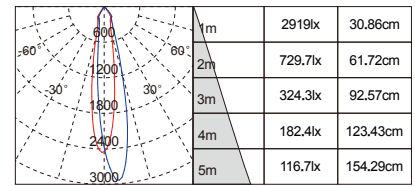

cd Height illuminance Diameter

Option colors

Outer Ring White & Many Colorful Inner Ring for Optional



Outer Ring Black & Many Colorful Inner Ring for Optional



Various Brand of COB LED Light Source:



RECESSED LED SPOT LIGHT

TECHNICAL SPECIFICATIONS

Input (Optional) 220-240V~50/60 Hz

Maximum Wattage 10W±10% Max

Number of LEDs

1 LEDs COB

Luminous Flux

900LM (3000K)

Main Material

Die-casting Aluminum

Color Temperature

3000K / 4000K / 6500K

CRI ≥80

Power Factor ≥0.9


Working Temperature -10°C~45°C

Beam Angle (Optional) 25°

Fixture Dimmable Non-dimmable

Electrical

Protection class IP20



Especially designed for:

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.




Product Model No.	AP-SPT564-10W	
Packaging Detail	54.5×33.5×44cm	
	STD PKG	60pcs
	N.W	17.4kgs
	G.W	20.6kgs

AP-SPT564-10W

DC250mA10W BridgeluxDC30-42VDCLED(COB)/

PRI:3000K220-240V0.12A

Driver SEC: Constant Current:



Warm White 3000K ∠ 25°

1m	2347lx	44.11cm
2m	586.7lx	88.22cm
3m	260.8lx	132.32cm
4m	146.7lx	176.43cm
5m	93.87lx	220.54cm

cd Height illuminance Diameter

Option colors

Outer Ring White & Many Colorful Inner Ring for Optional



Chrome Silver Rose Gold Matte Gold

Outer Ring Black & Many Colorful Inner Ring for Optional



Chrome Silver Rose Gold Matte Gold

Various Brand of COB LED Light Source:



RECESSED LED SPOT LIGHT

TECHNICAL SPECIFICATIONS

Input (Optional)	220-240V~50/60 Hz
Maximum Wattage	12W±10% Max

Number of LEDs

1 LEDs COB

Luminous Flux

1680LM (3000K)


Main Material

Die-casting Aluminum

Color Temperature

3000K / 4000K / 6500K

CRI	≥80
Power Factor	≥0.9
Working Temperature	-10°C~45°C
Beam Angle (Optional)	36°
Fixture Dimmable	Non-dimmable
Electrical	External Driver
Protection class	IP20

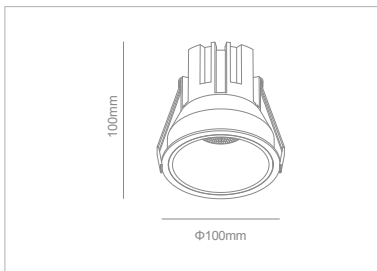

Especially designed for:

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.



Product Model No.	AP-SPT564-12W	
Packaging Detail	57×25×48.8cm	
	STD PKG	40pcs
	N.W	16.8kgs
	G.W	19.2kgs

AP-SPT564-12W

12W Current: Bridgelux DC300mA LED (COB) DC30-42VDC 3100K

/1300lm PRI: 220-240/ incl. -V~ 50/60 Hz 0.07A



Warm White 3000K ∠36°

	1m	7094lx	31.75cm
	2m	1773lx	63.50cm
	3m	788.2lx	95.26cm
	4m	443.4lx	127.01cm
	5m	283.7lx	158.76cm
cd	Height	illuminance	Diameter

Option colors

Outer Ring White & Many Colorful Inner Ring for Optional



Chrome Silver Rose Gold Matte Gold

Outer Ring Black & Many Colorful Inner Ring for Optional



Chrome Silver Rose Gold Matte Gold

Various Brand of COB LED Light Source:



Product series

AP-SPT701-7W



RECESSED LED SPOT LIGHT

TECHNICAL SPECIFICATIONS

Input (Optional) 220-240V~50/60 Hz

Maximum Wattage 7W±10% Max

Number of LEDs

1 LED COB

Luminous Flux

270LM (3000K)

Main Material

Aluminum & PC Lens Diffuser

Color Temperature

3000K / 4000K / 6500K

CRI ≥80

Power Factor ≥0.8

Working Temperature -10°C~45°C

Beam Angle (Optional) 18°

Fixture Dimmable Non-dimmable

Electrical

Protection class IP20



Product Model No. AP-SPT701-7W

Packaging Detail 62×62×30.5cm



STD PKG 25pcs

N.W 11kgs

G.W 13.5kgs

VAP-SPT701-7W


DC8-12VDC7W LED 3000K/

PRI:270lm220-240/ incl.V~50/60 Hz 0.050A


Driver SEC: Constant Current: DC600mA



Warm White 3000K ∠ 18°

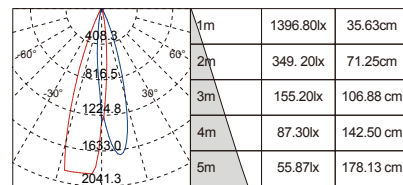

cd Height illuminance Diameter



Especially designed for:

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.



Various Brand of COB LED Light Source:



RECESSED LED SPOT LIGHT

TECHNICAL SPECIFICATIONS	
Input (Optional)	220-240V~50/60 Hz
Maximum Wattage	7W±10% Max


Number of LEDs	
1 LED COB	

Luminous Flux	
270LM (3000K)	

Main Material	
Aluminum & PC Lens Diffuser	

Color Temperature	
3000K / 4000K / 6500K	

CRI	≥80
Power Factor	≥0.8
Working Temperature	-10°C~45°C
Beam Angle (Optional)	18°
Fixture Dimmable	Non-dimmable
Electrical	External Driver
Protection class	IP20

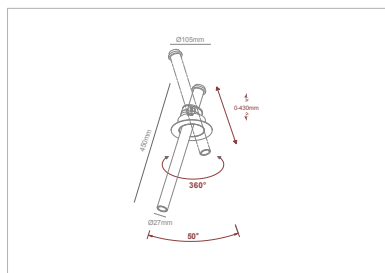

Especially designed for:

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.



Product Model No.	AP-SPT701-7W	
Packaging Detail	62×50×50.5cm	
	STD PKG	20pcs
	N.W	11kgs
	G.W	13.5kgs

AP-SPT701-7W

DC8-12VDC7W LED 3000K/

PRI:270lm220-240/ incl.V~50/60 Hz 0.050A

Driver SEC: Constant Current: DC600mA



Warm White 3000K ∠ 18°

	1m	1396.80lx	35.63cm
	2m	349.20lx	71.25cm
	3m	155.20lx	106.88 cm
	4m	87.30lx	142.50 cm
	5m	55.87lx	178.13 cm
cd	Height	illuminance	Diameter

Various Brand of COB LED Light Source:



RECESSED LED
SPOT LIGHT

TECHNICAL SPECIFICATIONS

Input (Optional)	220-240V~50/60 Hz
Maximum Wattage	7W±10% Max

Number of LEDs
1 LED COB

Luminous Flux
270LM (3000K)

Main Material
Aluminum & PC Lens Diffuser

Color Temperature
3000K / 4000K / 6500K

CRI	≥80
-----	-----

Power Factor	≥0.8
--------------	------


Working Temperature	-10°C~45°C
---------------------	------------

Beam Angle (Optional)	18°
-----------------------	-----

Fixture Dimmable	Non-dimmable
------------------	--------------

Electrical	External Driver
------------	-----------------

Protection class	IP20
------------------	------

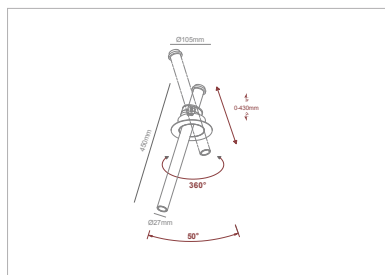

Especially designed for:

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.



Product Model No.	AP-SPT701-7W	
Packaging Detail	62×26×70.5cm	
	STD PKG	10pcs
	N.W	6.5kgs
	G.W	9kgs

AP-SPT701-7W

DC8-12VDC7W LED 3000K/

PRI:270lm220-240/ incl.V~50/60 Hz 0.050A

Driver SEC: Constant Current: DC600mA



Warm White 3000K ∠ 18°

	1m	1396.80lx	35.63cm
	2m	349.20lx	71.25cm
	3m	155.20lx	106.88 cm
	4m	87.30lx	142.50 cm
	5m	55.87lx	178.13 cm
	cd	Height	illuminance Diameter

Various Brand of COB LED Light Source:



RECESSED LED SPOT LIGHT

TECHNICAL SPECIFICATIONS

Input (Optional) 220-240V~50/60 Hz

Maximum Wattage 7W±10% Max

Number of LEDs

1 LED COB

Luminous Flux

270LM (3000K)

Main Material

Aluminum & PC Lens Diffuser

Color Temperature

3000K / 4000K / 6500K

CRI ≥80

Power Factor ≥0.8

Working Temperature -10°C~45°C

Beam Angle (Optional) 18°

Fixture Dimmable Non-dimmable

Electrical

Protection class IP20



Product Model No. AP-SPT701-7W

Packaging Detail 62×62×30.5cm



STD PKG 25pcs

N.W 13.4kgs

G.W 15.7kgs

AP-SPT701-7W


DC8-12VDC7W LED 3000K/

PRI:270lm220-240/ incl.V~50/60 Hz 0.050A


Driver SEC: Constant Current: DC600mA



Warm White 3000K ∠ 18°

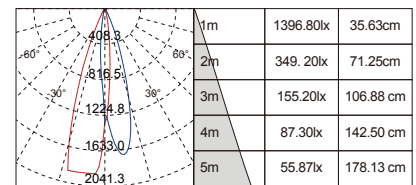

cd Height illuminance Diameter

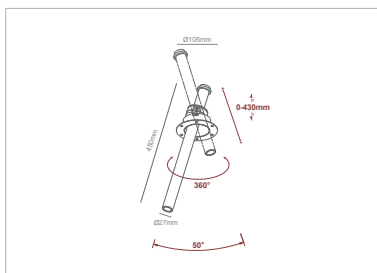

Especially designed for:

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.



Various Brand of COB LED Light Source:



RECESSED LED SPOT LIGHT

TECHNICAL SPECIFICATIONS

Input (Optional)	220-240V~50/60 Hz
Maximum Wattage	7W±10% Max


Number of LEDs
1 LED COB

Luminous Flux
270LM (3000K)

Main Material
Aluminum & PC Lens Diffuser

Color Temperature
3000K / 4000K / 6500K

CRI	≥80
Power Factor	≥0.8
Working Temperature	-10°C~45°C
Beam Angle (Optional)	18°
Fixture Dimmable	Non-dimmable
Electrical	External Driver
Protection class	IP20

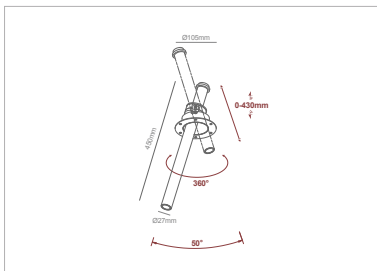

Especially designed for:

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.



Product Model No.	AP-SPT701-7W	
Packaging Detail	62×50×50.5cm	
	STD PKG	20pcs
	N.W	13.06kgs
	G.W	15.7kgs

AP-SPT701-7W

DC8-12VDC7W LED 3000K/

PRI:270lm220-240/ incl.V~50/60 Hz 0.050A

Driver SEC: Constant Current: DC600mA



Warm White 3000K ∠ 18°

1m	1396.80lx	35.63cm
2m	349.20lx	71.25cm
3m	155.20lx	106.88 cm
4m	87.30lx	142.50 cm
5m	55.87lx	178.13 cm

cd	Height	illuminance	Diameter
----	--------	-------------	----------

Various Brand of COB LED Light Source:





ADJUSTABLE ANGLE SPOTLIGHT

LIGHT IS THE SOUL OF A SPACE
NO MAIN LIGHT HAS BECOME THE MAINSTREAM

+
MODERN.

Simple classic
High appearance value

|||
SIX BIG ADVANTAGE

Deductive

**Nordic aesthetics
Modern**

**Taste of
choice**





**Taste of
choice**

**New
Vision**

**Nordic
aesthetics**




S P A C E S T Y L E

NO MAIN LIGHT

HERO SERIES

Draw the outline of lines
to create three-dimensional
sense, improve the space style



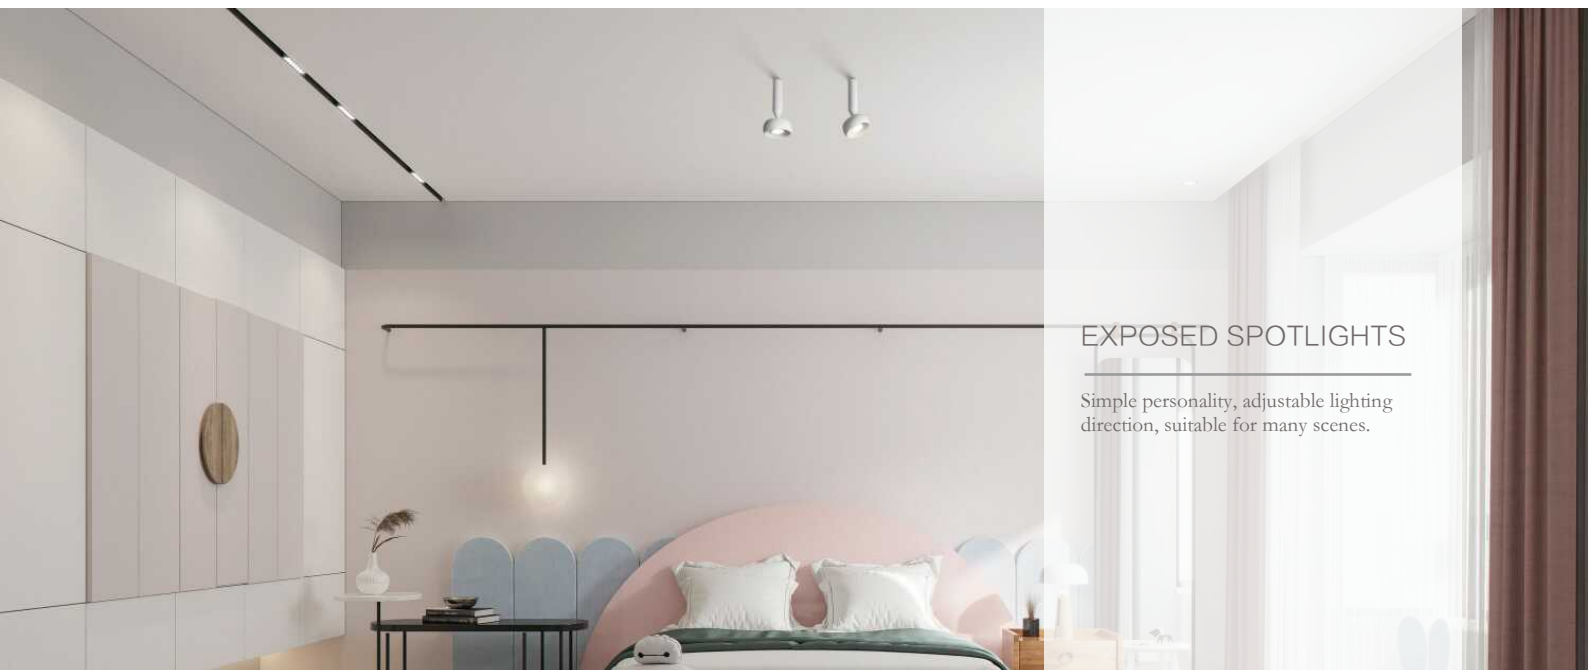

EXPOSED SPOTLIGHTS

Simple personality, adjustable lighting direction, suitable for many scenes.



Open folding spotlight



Creative spotlight



Patented product

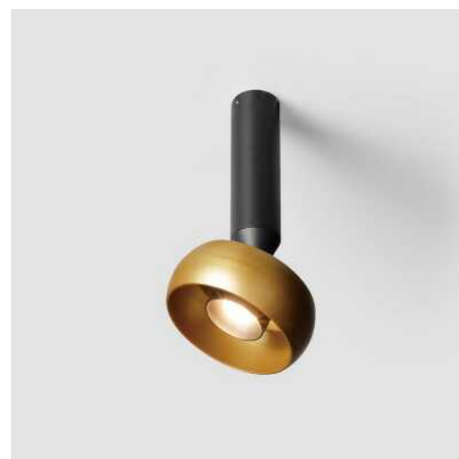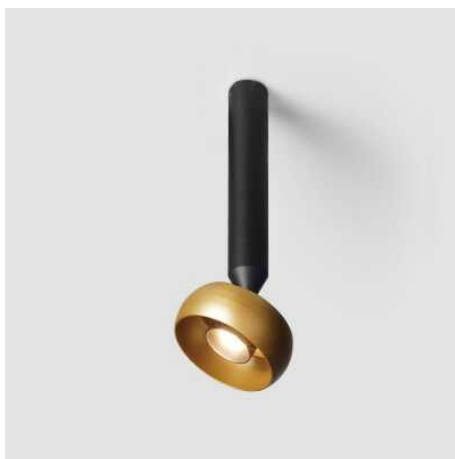

CLEAR MOUNTED LIGHT




Green, healthy and
energy saving

High color rendering > 90
No opening



True light and color, return to true life

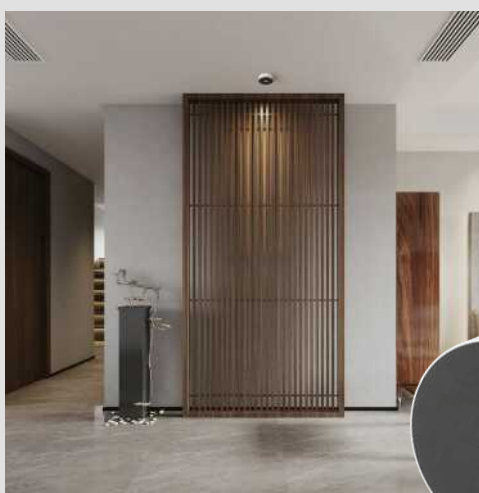

Easy to install



Durable and anodized



Product series

AP-MZ-0010A-7W



SURFACE LED
CEILING LIGHT

TECHNICAL SPECIFICATIONS

Input (Optional)	220-240V~50/60 Hz
Maximum Wattage	7W±10% Max


Number of LEDs
1 LED COB

Luminous Flux
476LM (3000K)

Main Material
Aluminum & PC Lens Diffuser

Color Temperature
3000K / 4000K / 6500K

CRI	≥90
Power Factor	≥0.8
Working Temperature	-10°C~45°C
Beam Angle (Optional)	45°
Fixture Dimmable	Non-dimmable
Electrical	Internal Driver
Protection class	IP20

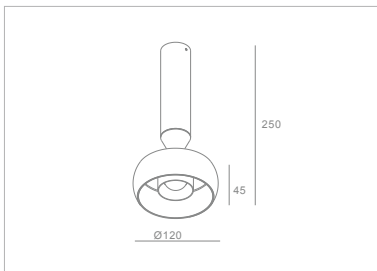

Especially designed for:

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.




Product Model No.	AP-MZ-0010A-7W	
Packaging Detail	64×48.5×31.5cm	
	STD PKG	12pcs
	N.W	6.12kgs
	G.W	8.8kgs

AP-MZ-0010A-7W

DC30-42VDC7W LED 3000K/

PRI:476lm220-240/ incl. -V~ 50/60 Hz 0.050A
Driver SEC: Constant Current: DC170mA



Warm White 3000K ∠45°

	1m	739.88lx	76.77cm
	2m	184.97lx	153.55cm
	3m	82.21lx	230.32cm
	4m	46.24lx	307.09cm
	5m	29.60lx	383.86cm
cd	Height	illuminance	Diameter

Option colors



Various Brand of COB LED Light Source:



SURFACE LED
CEILING LIGHT

TECHNICAL SPECIFICATIONS	
Input (Optional)	220-240V~50/60 Hz
Maximum Wattage	7W±10% Max


Number of LEDs	1 LED COB
----------------	-----------

Luminous Flux	476LM (3000K)
---------------	---------------

Main Material	Aluminum & PC Lens Diffuser
---------------	-----------------------------

Color Temperature	3000K / 4000K / 6500K
-------------------	-----------------------

CRI	≥90
Power Factor	≥0.8
Working Temperature	-10°C~45°C
Beam Angle (Optional)	45°
Fixture Dimmable	Non-dimmable
Electrical	Internal Driver
Protection class	IP20

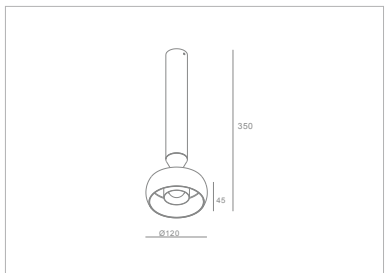

Especially designed for:

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.




Product Model No.	AP-MZ-0011A-7W	
Packaging Detail	64×48.5×41.5cm	
	STD PKG	12pcs
	N.W	7.08kgs
	G.W	10.51kgs

AP-MZ-0011A-7W

DC30-42V/DC7W LED 3000K/

PRI:476lm220-240/ incl. -V~ 50/60 Hz 0.050A


Driver SEC: Constant Current: DC170mA



Warm White 3000K ∠45°

	1m	739.88lx	76.77cm
	2m	184.97lx	153.55cm
	3m	82.21lx	230.32cm
	4m	46.24lx	307.09cm
	5m	29.60lx	383.86cm
cd	Height	illuminance	Diameter

Option colors



Various Brand of COB LED Light Source:



Product series

AP-MZ-0014A-7W



SURFACE LED
CEILING LIGHT

TECHNICAL SPECIFICATIONS

Input (Optional)	220-240V~50/60 Hz
Maximum Wattage	7W±10% Max


Number of LEDs
1 LEDs COB

Luminous Flux
476LM (3000K)

Main Material
Aluminum & PC Lens Diffuser

Color Temperature
3000K / 4000K / 6500K

CRI	≥90
Power Factor	≥0.8
Working Temperature	-10°C~45°C
Beam Angle (Optional)	45°
Fixture Dimmable	Non-dimmable
Electrical	Internal Driver
Protection class	IP20



Especially designed for:

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.



Product Model No.	AP-MZ-0014A-7W	
Packaging Detail	33×32.5×35cm	
	STD PKG	12pcs
	N.W	4.91kgs
	G.W	6.28kgs

AP-MZ-0014A-7W

DC170mA7W LED 3000KDC30-42VDC476lm / incl./

PRI:-220-240 V~ 50/60 Hz 0.050A

ELECTRONIC Driver SEC: Constant Current:



Warm White 3000K ∠ 45°

1m	739.88lx	76.77cm
2m	184.97lx	153.55cm
3m	82.21lx	230.32cm
4m	46.24lx	307.09cm
5m	29.60lx	383.86cm

cd Height illuminance Diameter

Option colors




Various Brand of COB LED Light Source:



Product series

AP-MZ-0020A-10W

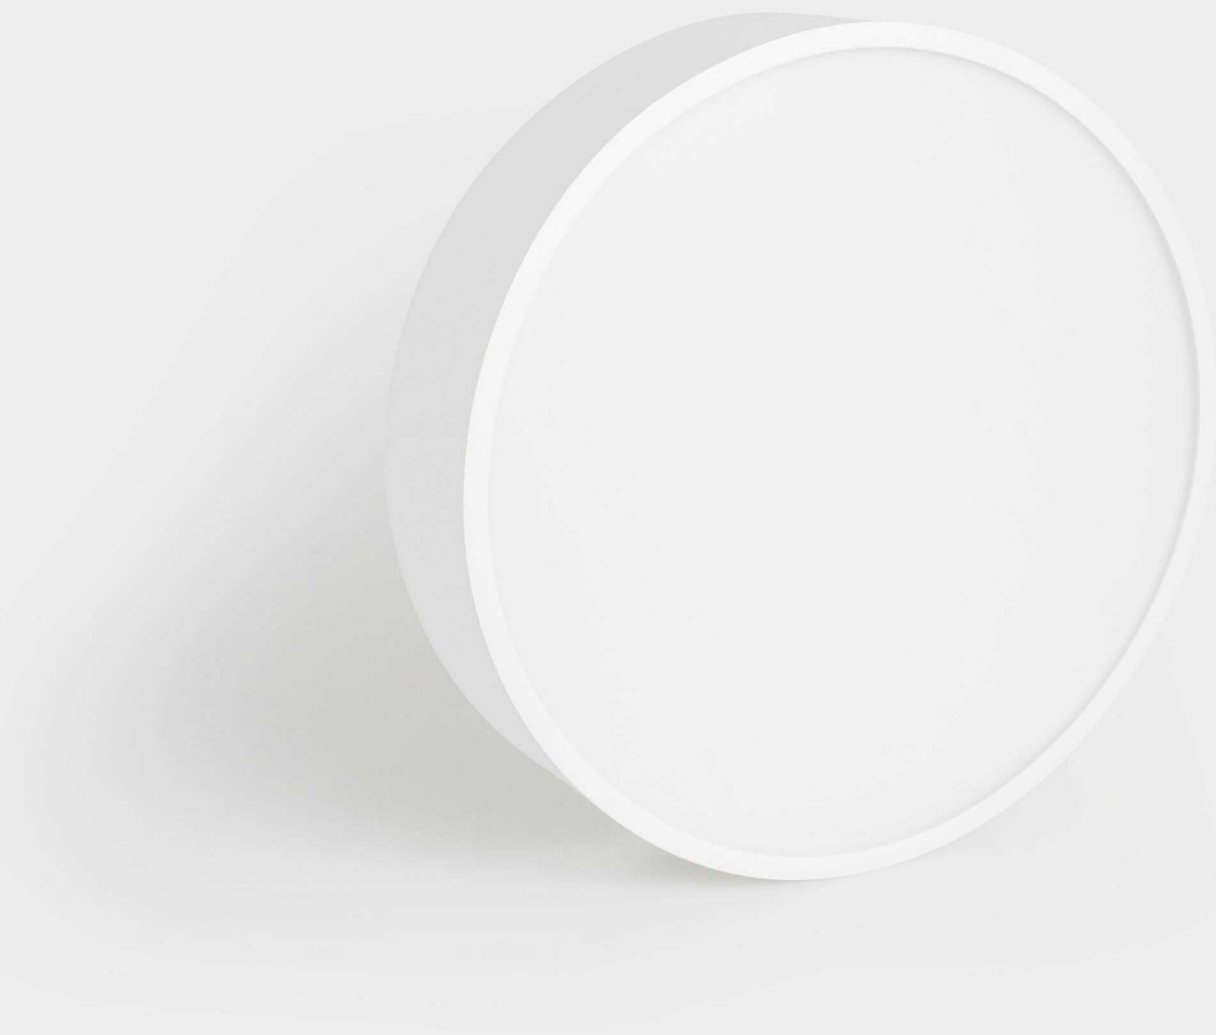

SURFACE LED
CEILING LIGHT

TECHNICAL SPECIFICATIONS	
Input (Optional)	220-240V~50/60 Hz
Maximum Wattage	10W±10% Max


Number of LEDs
120 LEDs SMD

Luminous Flux
883LM (3000K)

Main Material
Aluminum & PC


Color Temperature
3000K / 4000K / 6500K

CRI	≥90
Power Factor	≥0.92
Working Temperature	-10°C~45°C
Beam Angle (Optional)	110°
Fixture Dimmable	Non-dimmable
Electrical	Internal Driver
Protection class	IP20

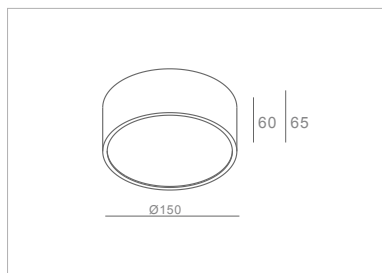

Especially designed for:

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.



Product Model No.	AP-MZ-0020A-10W	
Packaging Detail	62×62×30.5cm	
	STD PKG	25pcs
	N.W	11kgs
	G.W	13.5kgs

AP-MZ-0020A-10W

10W LED 3000K 883lm / incl. MEGALUX Driver SEC: Constant Current: DC250mA
DC30-42V DC / PRI: 220-240 V~ 50/60 Hz 0.065A



Warm White 3000K ∠110°

1m	393.97lx	209.29cm
2m	98.49lx	418.58cm
3m	43.77lx	627.86cm
4m	24.62lx	837.15cm
5m	15.76lx	1046.44cm

cd Height illuminance Diameter

Option colors



Various Brand of SMD LED Light Source:



SURFACE LED
CEILING LIGHT

TECHNICAL SPECIFICATIONS	
Input (Optional)	220-240V~50/60 Hz
Maximum Wattage	20W±10% Max


Number of LEDs
288 LEDs SMD

Luminous Flux
1982LM (3000K)

Main Material
Aluminum & PC

Color Temperature
3000K / 4000K / 6500K

CRI	≥90
Power Factor	≥0.92
Working Temperature	-10°C~45°C
Beam Angle (Optional)	110°
Fixture Dimmable	Non-dimmable
Electrical	Internal Driver
Protection class	IP20

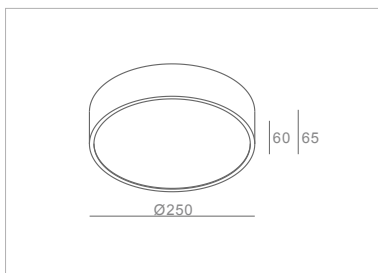

Especially designed for:

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.



Product Model No.	AP-MZ-0021A-20W	
Packaging Detail	62×62×30.5cm	
	STD PKG	25pcs
	N.W	11kgs
	G.W	13.5kgs

AP-MZ-0021A-20W

20W LED 3000K 1982lm / incl. MEGALUX Driver SEC: Constant Current: DC500mA
DC27-42V DC / PRI: 220-240 V~ 50/60 Hz 0.120A



Warm White 3000K ∠110°

	1m	851.89lx	217.88cm
	2m	212.97lx	435.76cm
	3m	94.65lx	653.64cm
	4m	53.24lx	871.52cm
	5m	34.08lx	1089.40cm
	cd	Height	illuminance Diameter

Option colors




Various Brand of SMD LED Light Source:



SURFACE LED
CEILING LIGHT

TECHNICAL SPECIFICATIONS	
Input (Optional)	220-240V~50/60 Hz
Maximum Wattage	30W±10% Max
Number of LEDs	
480 LEDs SMD	
Luminous Flux	
3735LM (3000K)	
Main Material	
Aluminum & PC	
Color Temperature	
3000K / 4000K / 6500K	

CRI	≥90
Power Factor	≥0.92
Working Temperature	-10°C~45°C
Beam Angle (Optional)	110°
Fixture Dimmable	Non-dimmable
Electrical	Internal Driver
Protection class	IP20

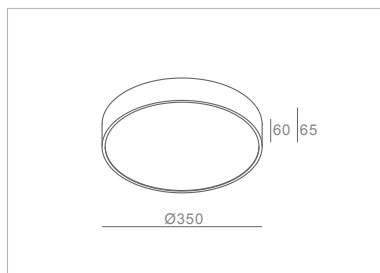

Especially designed for:

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.



Product Model No.	AP-MZ-0022A-30W	
Packaging Detail	62×62×30.5cm	
	STD PKG	25pcs
	N.W	11kgs
	G.W	13.5kgs

AP-MZ-0022A-30W

30W LED 3000K 3735lm / incl. MEGALUX Driver SEC: Constant Current: DC750mA
DC30-42V DC / PRI: 220-240 V~ 50/60 Hz 0.170A



Warm White 3000K ∠110°

	1m	1333.90lx	282.47cm
	2m	333.48lx	564.94cm
	3m	148.21lx	847.41cm
	4m	83.37lx	847.41cm
	5m	53.36lx	1412.35cm
	cd	Height	illuminance
		Diameter	

Option colors



Various Brand of SMD LED Light Source:



Product series

AP-MZ-0040A-10W



SURFACE LED
CEILING LIGHT

TECHNICAL SPECIFICATIONS	
Input (Optional)	220-240V~50/60 Hz
Maximum Wattage	10W±10% Max


Number of LEDs	
120 LEDs SMD	

Luminous Flux	
883LM (3000K)	

Main Material	
Aluminum & PC	

Color Temperature	
3000K / 4000K / 6500K	

CRI	≥90
Power Factor	≥0.92
Working Temperature	-10°C~45°C
Beam Angle (Optional)	110°
Fixture Dimmable	Non-dimmable
Electrical	Internal Driver
Protection class	IP20

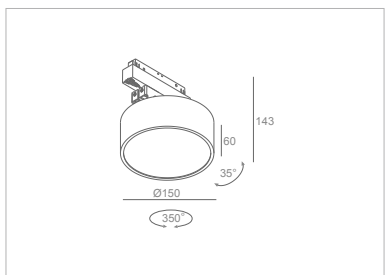

Especially designed for:

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.



Product Model No.	AP-MZ-0040A-10W	
Packaging Detail	40×40×32cm	
	STD PKG	8pcs
	N.W	4.37kgs
	G.W	6.37kgs

AP-MZ-0040A-10W

10W LED 3000K 883lm / incl. MEGALUX Driver SEC: Constant Current: DC250mA
DC30-42V DC / PRI: 220-240 V~ 50/60 Hz 0.065A



Warm White 3000K ∠110°

1m	393.97lx	209.29cm
2m	98.49lx	418.58cm
3m	43.77lx	627.86cm
4m	24.62lx	837.15cm
5m	15.76lx	1046.44cm

cd	Height	illuminance	Diameter
----	--------	-------------	----------

Option colors




Various Brand of SMD LED Light Source:



SURFACE LED
CEILING LIGHT

TECHNICAL SPECIFICATIONS	
Input (Optional)	220-240V~50/60 Hz
Maximum Wattage	20W±10% Max
Number of LEDs	
288 LEDs SMD	
Luminous Flux	
1982LM (3000K)	
Main Material	
Aluminum & PC	
Color Temperature	
3000K / 4000K / 6500K	

CRI	≥90
Power Factor	≥0.92
Working Temperature	-10°C~45°C
Beam Angle (Optional)	110°
Fixture Dimmable	Non-dimmable
Electrical	Internal Driver
Protection class	IP20

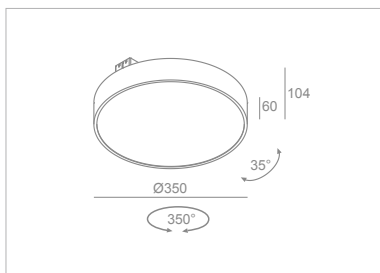

Especially designed for:

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.



Product Model No.	AP-MZ-0041A-20W	
Packaging Detail	31.5×31.5×41.5cm	
	STD PKG	3pcs
	N.W	11kgs
	G.W	13.5kgs

AP-MZ-0041A-20W

20W LED 3000K 1982lm / incl. MEGALUX Driver SEC: Constant Current: DC500mA
DC27-42V DC / PRI: 220-240 V~ 50/60 Hz 0.120A



Warm White 3000K ∠110°

	1m	851.89lx	217.88cm
	2m	212.97lx	435.76cm
	3m	94.65lx	653.64cm
	4m	53.24lx	871.52cm
	5m	34.08lx	1089.40cm
cd	Height	illuminance	Diameter

Option colors




Various Brand of SMD LED Light Source:



SURFACE LED
CEILING LIGHT

TECHNICAL SPECIFICATIONS	
Input (Optional)	220-240V~50/60 Hz
Maximum Wattage	30W±10% Max
Number of LEDs	
480 LEDs SMD	
Luminous Flux	
3735LM (3000K)	
Main Material	
Aluminum & PC	
Color Temperature	
3000K / 4000K / 6500K	

CRI	≥90
Power Factor	≥0.92
Working Temperature	-10°C~45°C
Beam Angle (Optional)	110°
Fixture Dimmable	Non-dimmable
Electrical	Internal Driver
Protection class	IP20

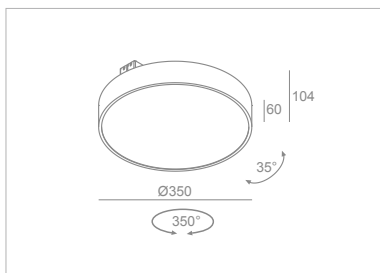

Especially designed for:

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.



Product Model No.	AP-MZ-0042A-30W	
Packaging Detail	41.5×41.5×41.5cm	
	STD PKG	3pcs
	N.W	11kgs
	G.W	13.5kgs

AP-MZ-0042A-30W

30W LED 3000K 3735lm / incl. MEGALUX Driver SEC: Constant Current: DC750mA
DC30-42V DC / PRI: 220-240 V~ 50/60 Hz 0.170A



Warm White 3000K ∠110°

1m	1333.90lx	282.47cm
2m	333.48lx	564.94cm
3m	148.21lx	847.41cm
4m	83.37lx	847.41cm
5m	53.36lx	1412.35cm
cd	Height	illuminance
		Diameter

Option colors



Various Brand of SMD LED Light Source:

OSRAM	PHILIPS	LUMENS	EPISTAR	CITIZEN	LUMENUS	DISON	SAMSUNG	BRIDGELUX	LG
-------	---------	--------	---------	---------	---------	-------	---------	-----------	----

Product series


AP-MZ-0060A-3W



SURFACE LED
CEILING LIGHT

TECHNICAL SPECIFICATIONS	
Input (Optional)	220-240V~50/60 Hz
Maximum Wattage	3W±10% Max
Number of LEDs	
1 LED COB	
Luminous Flux	
111LM (3000K)	
Main Material	
Aluminum & PC Lens Diffuser	
Color Temperature	
3000K	

CRI	≥90
Power Factor	≥0.8
Working Temperature	-10°C~45°C
Beam Angle (Optional)	8°
Fixture Dimmable	Non-dimmable
Electrical	Internal Driver
Protection class	IP20

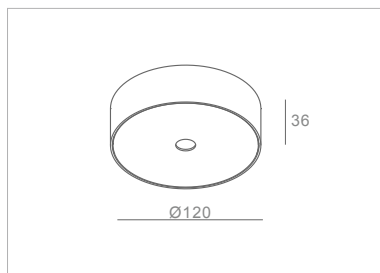

Especially designed for:

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.



Product Model No.	AP-MZ-0060A-3W	
Packaging Detail 	31×31×32.5cm	
	STD PKG	20pcs
	N.W	7.96kgs
	G.W	8.85kgs

AP-MZ-0060A-3W


DC3-6VDC3W LED 3000K/

PRI:111lm220-240/ incl.V~50/60 Hz 0.030A

Driver SEC: Constant Current: DC600mA



Warm White 3000K ∠8°

	1m	3477.50lx	15.21cm
	2m	869.37lx	30.43cm
	3m	386.39lx	45.64cm
	4m	217.34lx	60.85cm
	5m	139.10lx	76.07cm
	cd	Height	illuminance
Diameter			

Option colors



Various Brand of COB LED Light Source:



Product series

AP-MZ-0061A-7W



SURFACE LED
CEILING LIGHT

TECHNICAL SPECIFICATIONS	
Input (Optional)	220-240V~50/60 Hz
Maximum Wattage	7W±10% Max


Number of LEDs
3 LEDs COB

Luminous Flux
343LM (3000K)

Main Material
Aluminum & PC Lens Diffuser

Color Temperature
3000K

CRI	≥90
Power Factor	≥0.8
Working Temperature	-10°C~45°C
Beam Angle (Optional)	8°
Fixture Dimmable	Non-dimmable
Electrical	Internal Driver
Protection class	IP20

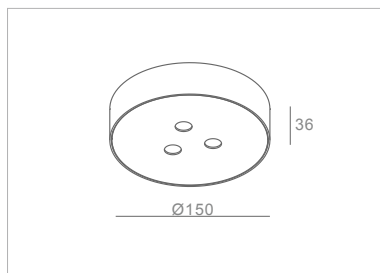

Especially designed for:

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.



Product Model No.	AP-MZ-0061A-7W	
Packaging Detail	37×37×32.5cm	
	STD PKG	20pcs
	N.W	12.24kgs
	G.W	14.16kgs

AP-MZ-0061A-7W

DC8-12VDC7W LED 3000K/

PRI:343lm220-240/ incl.V~50/60 Hz 0.050A

Driver SEC: Constant Current: DC600mA



Warm White 3000K ∠8°

	1m	8158.67lx	15.21cm
	2m	2039.67lx	30.43cm
	3m	906.52lx	45.64cm
	4m	509.92lx	60.85cm
	5m	326.35lx	76.07cm

cd	Height	illuminance	Diameter
----	--------	-------------	----------

Option colors



Various Brand of COB LED Light Source:



Product series

AP-MZ-0070A-7W



SURFACE LED
CEILING LIGHT

TECHNICAL SPECIFICATIONS	
Input (Optional)	220-240V~50/60 Hz
Maximum Wattage	7W±10% Max


Number of LEDs	
1 LED COB	

Luminous Flux	
528LM (3000K)	

Main Material	
Aluminum & PC Lens Diffuser	

Color Temperature	
3000K / 4000K / 6500K	

CRI	≥90
Power Factor	≥0.8
Working Temperature	-10°C~45°C
Beam Angle (Optional)	24°
Fixture Dimmable	Non-dimmable
Electrical	Internal Driver
Protection class	IP20

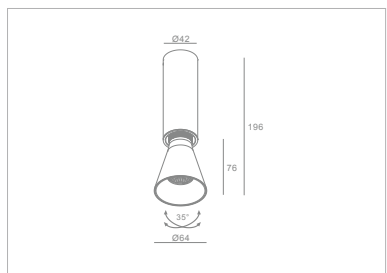

Especially designed for:

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.



Product Model No.	AP-MZ-0070A-7W	
Packaging Detail	55.5×33.5×51cm	
	STD PKG	30pcs
	N.W	8.31kgs
	G.W	11.31kgs

AP-MZ-0070A-7W

DC30-42VDC7W LED 3000K/

PRI:528lm220-240/ incl. -V~ 50/60 Hz 0.050A

Driver SEC: Constant Current: DC170mA



Warm White 3000K ∠ 24°

Height	1m	2m	3m	4m	5m
illuminance	2420.69lx	605.17lx	268.97lx	151.29lx	96.83lx
Diameter	39.24cm	78.48cm	117.72cm	156.95cm	196.19cm

Option colors



Various Brand of COB LED Light Source:



Product series

AP-MZ-0071A-7W



SURFACE LED
CEILING LIGHT

TECHNICAL SPECIFICATIONS	
Input (Optional)	220-240V~50/60 Hz
Maximum Wattage	7W±10% Max


Number of LEDs
1 LED COB

Luminous Flux
528LM (3000K)

Main Material
Aluminum & PC Lens Diffuser

Color Temperature
3000K / 4000K / 6500K

CRI	≥90
Power Factor	≥0.92
Working Temperature	-10°C~45°C
Beam Angle (Optional)	24°
Fixture Dimmable	Non-dimmable
Electrical	Internal Driver
Protection class	IP20

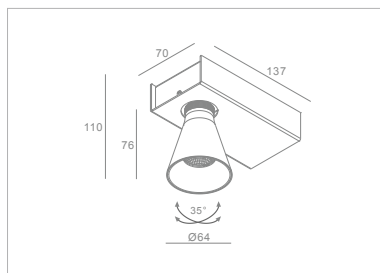

Especially designed for:

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.



Product Model No.	AP-MZ-0071A-7W	
Packaging Detail 	60×39.5×33cm	
	STD PKG	20pcs
	N.W	11.22kgs
	G.W	14.22kgs


AP-MZ-0070A-7W

DC30-42VDC7W LED 3000K/

PRI:528lm220-240/ incl. -V~ 50/60 Hz 0.050A



Warm White 3000K ∠ 24°

	1m	2420.69lx	39.24cm
	2m	605.17lx	78.48cm
	3m	268.97lx	117.72cm
	4m	151.29lx	156.95cm
	5m	96.83lx	196.19cm
	cd	Height	illuminance Diameter

Option colors




Various Brand of COB LED Light Source:



SURFACE LED
CEILING LIGHT

TECHNICAL SPECIFICATIONS	
Input (Optional)	220-240V~50/60 Hz
Maximum Wattage	2x7W±10% Max
Number of LEDs	2 LEDs COB
Luminous Flux	1092LM (3000K)
Main Material	Aluminum & PC Lens Diffuser
Color Temperature	3000K / 4000K / 6500K

CRI	≥90
Power Factor	≥0.92
Working Temperature	-10°C~45°C
Beam Angle (Optional)	24°
Fixture Dimmable	Non-dimmable
Electrical	Internal Driver
Protection class	IP20

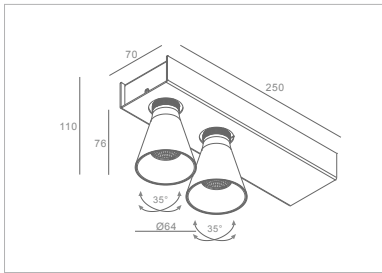

Especially designed for:
Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.



Product Model No.	AP-MZ-0071A-2x7W	
Packaging Detail	62×36.5×33cm	
	STD PKG	12pcs
	N.W	12.06kgs
	G.W	15.06kgs

AP-MZ-0071A-2x7W
DC30-42VDC7W LED 3000K/
PRI:1092lm220-240V~/ incl. -50/60 Hz 0.088A
Driver SEC: Constant Current: DC360mA



1m	4266.69lx	38.15cm
2m	1066.67lx	76.30cm
3m	474.08lx	114.46cm
4m	266.67lx	152.61cm
5m	170.67lx	190.76cm

Option colors




Various Brand of COB LED Light Source:

OSRAM	PHILIPS	LUMENS	EPISTAR	CITIZEN	LUMENUS	DISON	LANSBUR	trigee	LG
-------	---------	--------	---------	---------	---------	-------	---------	--------	----

SURFACE LED
CEILING LIGHT

TECHNICAL SPECIFICATIONS	
Input (Optional)	220-240V~50/60 Hz
Maximum Wattage	3x7W±10% Max
Number of LEDs	3 LEDs COB
Luminous Flux	1510LM (3000K)
Main Material	Aluminum & PC Lens Diffuser
Color Temperature	3000K / 4000K / 6500K

CRI	≥90
Power Factor	≥0.92
Working Temperature	-10°C~45°C
Beam Angle (Optional)	24°
Fixture Dimmable	Non-dimmable
Electrical	Internal Driver
Protection class	IP20

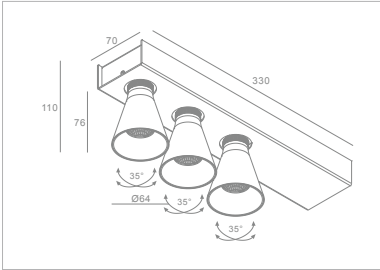

Especially designed for:
Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.



Product Model No.	AP-MZ-0072A-3x7W	
Packaging Detail	48.5×39.5×33cm	
	STD PKG	8pcs
	N.W	8.04kgs
	G.W	11.04kgs


AP-MZ-0072A-3x7W

DC30-42VDC21W LED 3000K/ PRI:1510lm220-240V~/ incl. -50/60 Hz 0.120A

Driver SEC: Constant Current: DC500mA



Warm White 3000K ∠ 24°

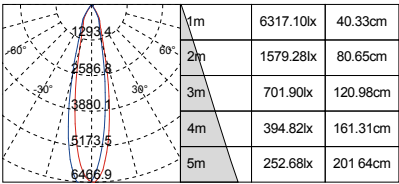

cd Height illuminance Diameter

Option colors



Various Brand of COB LED Light Source:



Product series

AP-MZ-0100A-7W



SURFACE LED
CEILING LIGHT

TECHNICAL SPECIFICATIONS

Input (Optional) 220-240V~50/60 Hz

Maximum Wattage 7W±10% Max

Number of LEDs

1 LED COB

Luminous Flux

476LM (3000K)

Main Material

Aluminum & PC Lens Diffuser

Color Temperature

3000K / 4000K / 6500K

CRI ≥90

Power Factor ≥0.8

Working Temperature -10°C~45°C


Beam Angle (Optional) 24°

Fixture Dimmable Non-dimmable

Electrical

Protection class IP20

Internal Driver



Especially designed for:

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.



Product Model No. AP-MZ-0100A-7W

Packaging Detail



STD PKG 32pcs

N.W 6.66kgs


G.W 8.7kgs

AP-MZ-0100A-7W

DC30-42VDC7W

LED 3000K/ PRI:476lm220-240/ incl. -V~ 50/60

Hz 0.050A

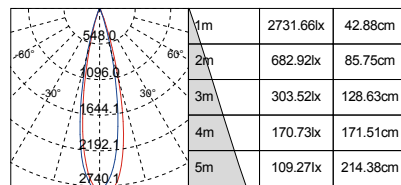

cd Height illuminance Diameter

Option colors




Various Brand of COB LED Light Source:



SURFACE LED
CEILING LIGHT

TECHNICAL SPECIFICATIONS	
Input (Optional)	220-240V~50/60 Hz
Maximum Wattage	7W±10% Max
Number of LEDs	
1 LED COB	
Luminous Flux	
476LM (3000K)	
Main Material	
Aluminum & PC Lens Diffuser	
Color Temperature	
3000K / 4000K / 6500K	

CRI	≥90
Power Factor	≥0.8
Working Temperature	-10°C~45°C
Beam Angle (Optional)	24°
Fixture Dimmable	Non-dimmable
Electrical	Internal Driver
Protection class	IP20

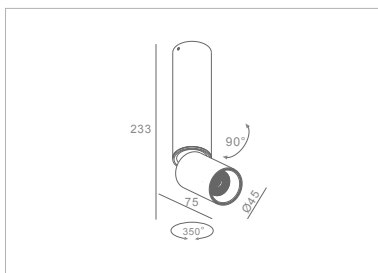

Especially designed for:

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.



Product Model No.	AP-MZ-0101A-7W	
Packaging Detail	30×26×30cm	
	STD PKG	25pcs
	N.W	11.65kgs
	G.W	13.6kgs

AP-MZ-0101A-7W

DC30-42VDC7W LED 3000K/

PRI:476lm220-240/ incl. -V~ 50/60 Hz 0.050A



Warm White 3000K ∠ 24°

	1m	2731.66lx	42.88cm
	2m	682.92lx	85.75cm
	3m	303.52lx	128.63cm
	4m	170.73lx	171.51cm
	5m	109.27lx	214.38cm
cd	Height	illuminance	Diameter

Option colors



Various Brand of COB LED Light Source:

OSRAM	PHILIPS	LUMENS	EPISTAR	CITIZEN	LUMINUS	DISON	SAMSUNG	BRIDGELUX	LG
-------	---------	--------	---------	---------	---------	-------	---------	-----------	----

SURFACE LED
CEILING LIGHT

TECHNICAL SPECIFICATIONS	
Input (Optional)	220-240V~50/60 Hz
Maximum Wattage	7W±10% Max


Number of LEDs	1 LED COB
----------------	-----------

Luminous Flux	476LM (3000K)
---------------	---------------

Main Material	Aluminum & PC Lens Diffuser
---------------	-----------------------------

Color Temperature	3000K / 4000K / 6500K
-------------------	-----------------------

CRI	≥90
Power Factor	≥0.8
Working Temperature	-10°C~45°C
Beam Angle (Optional)	24°
Fixture Dimmable	Non-dimmable
Electrical	Internal Driver
Protection class	IP20

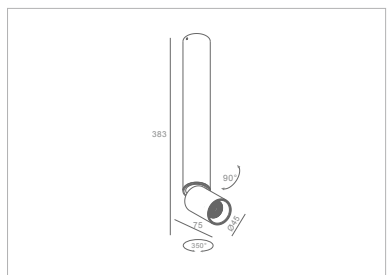

Especially designed for:

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.



Product Model No.	AP-MZ-0102A-7W	
Packaging Detail	41x29.5x24cm	
	STD PKG	20pcs
	N.W	9.73kgs
	G.W	12.73kgs

AP-MZ-0102A-7W

DC30-42VDC7W LED 3000K/

PRI:476lm220-240/ incl. -V~ 50/60 Hz 0.050A



Warm White 3000K ∠ 24°

1m	2731.66lx	42.88cm
2m	682.92lx	85.75cm
3m	303.52lx	128.63cm
4m	170.73lx	171.51cm
5m	109.27lx	214.38cm

cd Height illuminance Diameter

Option colors



Various Brand of COB LED Light Source:

OSRAM	PHILIPS	LUMENS	EPISTAR	CITIZEN	LUMINUS	DISON	LANSBUR	trigreen	LG
-------	---------	--------	---------	---------	---------	-------	---------	----------	----

SURFACE LED
CEILING LIGHT

TECHNICAL SPECIFICATIONS

Input (Optional) 220-240V~50/60 Hz

Maximum Wattage 15W±10% Max

Number of LEDs

1 LED COB

Luminous Flux

867LM (3000K)

Main Material

Aluminum & PC Lens Diffuser

Color Temperature

3000K / 4000K / 6500K

CRI ≥90

Power Factor ≥0.92

Working Temperature -10°C~45°C


Beam Angle (Optional) 24°

Fixture Dimmable Non-dimmable

Electrical

Protection class IP20

Internal Driver



Especially designed for:

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.



Product Model No. AP-MZ-0103A-15W

Packaging Detail 50.5x28x21.5cm



STD PKG 24pcs

N.W 6.66kgs


G.W 8.7kgs

AP-MZ-0103A-15W

DC360mA/450mA15W LED 3000K 867lmDC30-42VDC/ incl. -/
PRI: 220-240 V~ 50/60 Hz 0.088A



Warm White 3000K ∠ 24°

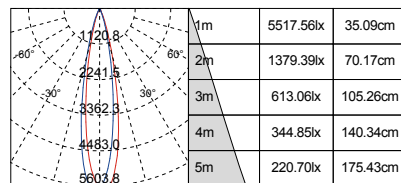

cd Height illuminance Diameter

Option colors



Various Brand of COB LED Light Source:



Product series

AP-MZ-0106A-7W



SURFACE LED
CEILING LIGHT

TECHNICAL SPECIFICATIONS	
Input (Optional)	220-240V~50/60 Hz
Maximum Wattage	7W±10% Max


Number of LEDs	
1 LEDs COB	

Luminous Flux	
476LM (3000K)	

Main Material	
Aluminum & PC Lens Diffuser	

Color Temperature	
3000K / 4000K / 6500K	

CRI	≥90
Power Factor	≥0.5
Working Temperature	-10°C~45°C
Beam Angle (Optional)	24°
Fixture Dimmable	Non-dimmable
Electrical	Internal Driver
Protection class	IP20

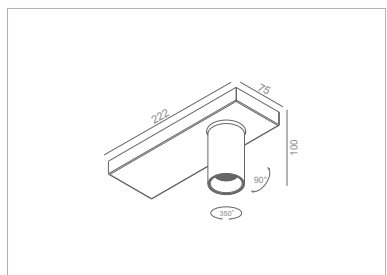

Especially designed for:

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.




Product Model No.	AP-MZ-0106A-7W	
Packaging Detail	52×33.5×40cm	
	STD PKG	18pcs
	N.W	10.66kgs
	G.W	12.66kgs

AP-MZ-0106A-7W
DC18V7W LEDDC3000K/

PRI:476lm220-240/ incl.V~-50/60 Hz 0.01A

Driver SEC: Constant Current: DC300mA



Warm White 3000K ∠ 24°

	1m	2731.66lx	42.88cm
	2m	682.92lx	85.75cm
	3m	303.52lx	128.63cm
	4m	170.73lx	171.51cm
	5m	109.27lx	214.38cm
cd	Height	illuminance	Diameter

Option colors




Various Brand of COB LED Light Source:



SURFACE LED
CEILING LIGHT

TECHNICAL SPECIFICATIONS	
Input (Optional)	220-240V~50/60 Hz
Maximum Wattage	15W±10% Max
Number of LEDs	1 LEDs COB
Luminous Flux	867LM (3000K)
Main Material	Aluminum & PC Lens Diffuser
Color Temperature	3000K / 4000K / 6500K

CRI	≥90
Power Factor	≥0.5
Working Temperature	-10°C~45°C
Beam Angle (Optional)	24°
Fixture Dimmable	Non-dimmable
Electrical	Internal Driver
Protection class	IP20

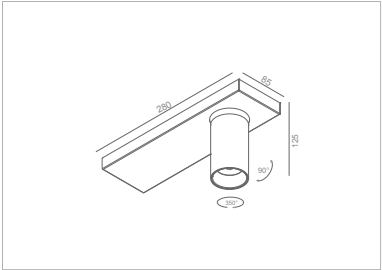

Especially designed for:
Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.




CE	RoHS	REACH	UL	CCC	ETL	UL	UL	UL	UL
Product Model No.		AP-MZ-0108A-15W							
Packaging Detail		64×36.5×47.5cm							
		STD PKG	18pcs						
		N.W	15.3kgs						
		G.W	17.3kgs						

AP-MZ-0108A-15W

DC36V15W LEDDC3000K/ PRI: 867lm220-240/ incl.V~ 50/60-Hz 0.18A

Driver SEC: Constant Current: DC350mA



Warm White 3000K ∠ 24°

	1m	5517.56lx	35.09cm
	2m	1379.39lx	70.17cm
	3m	613.06lx	105.26cm
	4m	344.85lx	140.34cm
	5m	220.70lx	175.43cm
	6m	150.00lx	210.52cm
cd	Height	illuminance	Diameter

Option colors



Various Brand of COB LED Light Source:

OSRAM	PHILIPS	LUMENS	EPISTAR	CITIZEN	LUMINUS	DISON	SAMSUNG	BRIDGELUX	LG
-------	---------	--------	---------	---------	---------	-------	---------	-----------	----

Product series


AP-MZ-0107A-14W



SURFACE LED
CEILING LIGHT

TECHNICAL SPECIFICATIONS	
Input (Optional)	220-240V~50/60 Hz
Maximum Wattage	14W±10% Max
Number of LEDs	
2 LEDs COB	
Luminous Flux	
952LM (3000K)	
Main Material	
Aluminum & PC Lens Diffuser	
Color Temperature	
3000K / 4000K / 6500K	

CRI	≥90
Power Factor	≥0.5
Working Temperature	-10°C~45°C
Beam Angle (Optional)	24°
Fixture Dimmable	Non-dimmable
Electrical	Internal Driver
Protection class	IP20

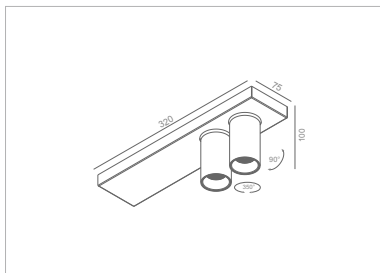

Especially designed for:

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.



Product Model No.	AP-MZ-0107A-14W	
Packaging Detail	44.5×36.5×40cm	
	STD PKG	12pcs
	N.W	11.09kgs
	G.W	13.09kgs

AP-MZ-0107A-14W

PRI: 952lm220-240/ incl.V~ -50/60DriverHzSEC:0.18AConstant
Current: DC350mA



Warm White 3000K ∠ 24°

	1m	2731.66lx	42.88cm
	2m	682.92lx	85.75cm
	3m	303.52lx	128.63cm
	4m	170.73lx	171.51cm
	5m	109.27lx	214.38cm
	cd	Height	illuminance Diameter

Option colors



Various Brand of COB LED Light Source:



SURFACE LED
CEILING LIGHT

TECHNICAL SPECIFICATIONS	
Input (Optional)	220-240V~50/60 Hz
Maximum Wattage	30W±10% Max


Number of LEDs	
2 LEDs COB	

Luminous Flux	
1734LM (3000K)	

Main Material	
Aluminum & PC Lens Diffuser	

Color Temperature	
3000K / 4000K / 6500K	

CRI	≥90
Power Factor	≥0.9
Working Temperature	-10°C~45°C
Beam Angle (Optional)	24°
Fixture Dimmable	Non-dimmable
Electrical	Internal Driver
Protection class	IP20

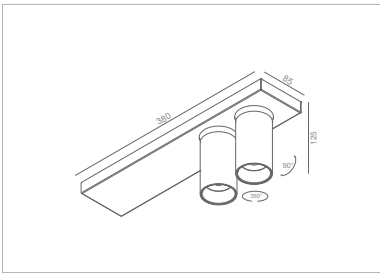

Especially designed for:
Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.



Product Model No.	AP-MZ-0109A-30W
Packaging Detail	48.5×42.5×47.5cm
STD PKG	12pcs
N.W	13.61kgs
G.W	15.61kgs

AP-MZ-0109A-30W

DC36V30W LEDDC3000K/ PRI: 1734lm220-240/ V~incl.50/60-Hz 0.36A
Driver SEC: Constant Current: DC700mA



Warm White 3000K ∠ 24°

1m	5517.56lx	35.09cm
2m	1379.39lx	70.17cm
3m	613.06lx	105.26cm
4m	344.85lx	140.34cm
5m	220.70lx	175.43cm

cd	Height	illuminance	Diameter
----	--------	-------------	----------

Option colors



Various Brand of COB LED Light Source:

OSRAM	PHILIPS	LUMENS	EPISTAR	CITIZEN	LUMENUS	DISON	SAMSUNG	BRIDGELUX	LG
-------	---------	--------	---------	---------	---------	-------	---------	-----------	----

Product series


AP-MZ-0110A-8W



SURFACE LED
CEILING LIGHT

TECHNICAL SPECIFICATIONS	
Input (Optional)	220-240V~50/60 Hz
Maximum Wattage	8W±10% Max
Number of LEDs	
1 LEDs COB	
Luminous Flux	
405LM (3000K)	
Main Material	
Aluminum & PC Lens Diffuser	
Color Temperature	
3000K / 4000K / 6500K	

CRI	≥90
Power Factor	≥0.95
Working Temperature	-10°C~45°C
Beam Angle (Optional)	45°
Fixture Dimmable	Non-dimmable
Electrical	External Driver
Protection class	IP54

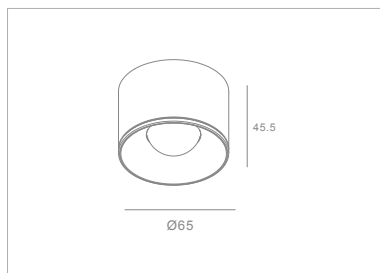

Especially designed for:

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.



Product Model No.	AP-MZ-0110A-8W	
Packaging Detail	30×30×18.5cm	
	STD PKG	48pcs
	N.W	8.64kgs
	G.W	10.64kgs

AP-MZ-0110A-8W


8W LED(COB) 3000K 405lm / incl. MEGALUX Driver SEC: Constant Current: PRI: 220-240 V~ 50/60 Hz 0.38A



Warm White 3000K ∠ 45°

	1m	856.29lx	64.79cm
	2m	214.07lx	129.58cm
	3m	95.14lx	194.37cm
	4m	53.52lx	259.16cm
	5m	34.25lx	323.96cm
cd	Height	illuminance	Diameter

Option colors




Various Brand of COB LED Light Source:



SURFACE LED
CEILING LIGHT

TECHNICAL SPECIFICATIONS	
Input (Optional)	220-240V~50/60 Hz
Maximum Wattage	12W±10% Max
Number of LEDs	
1 LEDs COB	
Luminous Flux	
607LM (3000K)	
Main Material	
Aluminum & PC Lens Diffuser	
Color Temperature	
3000K / 4000K / 6500K	

CRI	≥90
Power Factor	≥0.95
Working Temperature	-10°C~45°C
Beam Angle (Optional)	45°
Fixture Dimmable	Non-dimmable
Electrical	External Driver
Protection class	IP54

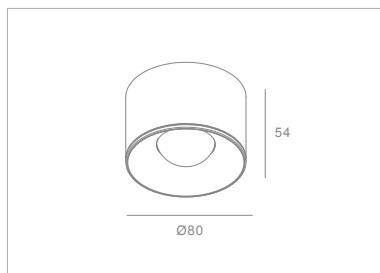

Especially designed for:

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.



Product Model No.	AP-MZ-0111A-12W	
Packaging Detail	27.5×27.5×30.5cm	
	STD PKG	36pcs
	N.W	10.98kgs
	G.W	12.98kgs

AP-MZ-0111A-12W

12W LED(COB) 3000K 607lm / incl. MEGALUX Driver SEC: Constant Current: PRI: 220-240 V~ 50/60 Hz 0.055A



Warm White 3000K ∠45°

	1m	1604.75lx	56.22cm
	2m	401.19lx	112.43cm
	3m	178.31lx	168.65cm
	4m	100.30lx	224.87cm
	5m	64.19lx	281.09cm
cd	Height	illuminance	Diameter

Option colors




Various Brand of COB LED Light Source:

OSRAM	PHILIPS	LUMENS	EPISTAR	CITIZEN	LUMENUS	DISON	SAMSUNG	BRIDGEMAN	LG
-------	---------	--------	---------	---------	---------	-------	---------	-----------	----

SURFACE LED
CEILING LIGHT

TECHNICAL SPECIFICATIONS	
Input (Optional)	220-240V~50/60 Hz
Maximum Wattage	16W±10% Max
Number of LEDs	
1 LEDs COB	
Luminous Flux	
1081LM (3000K)	
Main Material	
Aluminum & PC Lens Diffuser	
Color Temperature	
3000K / 4000K / 6500K	

CRI	≥90
Power Factor	≥0.95
Working Temperature	-10°C~45°C
Beam Angle (Optional)	45°
Fixture Dimmable	Non-dimmable
Electrical	External Driver
Protection class	IP54

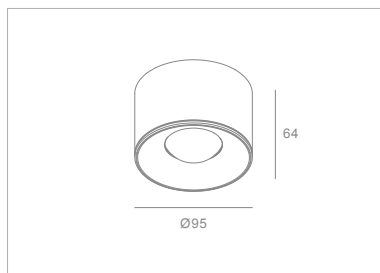

Especially designed for:

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.



Product Model No.	AP-MZ-0112A-16W	
Packaging Detail	32×32×25cm	
	STD PKG	27pcs
	N.W	12.42kgs
	G.W	14.42kgs

AP-MZ-0112A-16W


16W LED(COB) 3000K 1081lm / incl. MEGALUX Driver SEC: Constant Current: PRI: 220-240 V~ 50/60 Hz 0.73A



Warm White 3000K ∠45°

	1m	1461.42lx	107.69cm
	2m	365.35lx	215.38cm
	3m	162.38lx	323.07cm
	4m	91.34lx	430.76cm
	5m	58.46lx	538.44cm
cd	Height	illuminance	Diameter

Option colors



Various Brand of COB LED Light Source:

OSRAM	PHILIPS	LUMENS	EPISTAR	CITIZEN	LUMINUS	DISON	SAMSUNG	BRIDGELUX	LG
-------	---------	--------	---------	---------	---------	-------	---------	-----------	----

Product series

AP-MZ-0120A-12W



SURFACE LED
CEILING LIGHT

TECHNICAL SPECIFICATIONS

Input (Optional) 220-240V~50/60 Hz

Maximum Wattage 12W±10% Max

Number of LEDs

1 LEDs COB

Luminous Flux

822LM (3000K)

Main Material

Aluminum & PC Lens Diffuser

Color Temperature

3000K / 4000K / 6500K

CRI ≥90

Power Factor ≥0.8


Working Temperature -10°C~45°C

Beam Angle (Optional) 24°

Fixture Dimmable Non-dimmable

Electrical

Protection class IP20

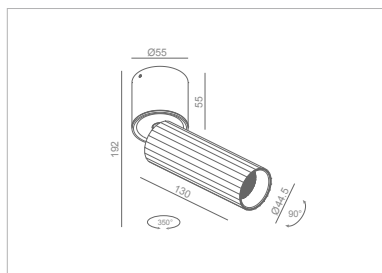

Especially designed for:

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.



Product Model No. AP-MZ-0120A-12W

Packaging Detail 46×27×36.5cm



STD PKG 24pcs

N.W 9.58kgs

G.W 11.58kgs


AP-MZ-0120A-12W

DC28-42V12W LED 3000KDC / PRI:822lm220-240/ incl. V~50/60 Hz 0.18A

Driver SEC: Constant Current: DC300mA




Warm White 3000K ∠ 24°

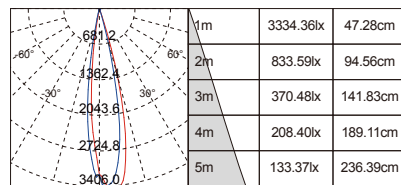

cd Height illuminance Diameter

Option colors



Various Brand of COB LED Light Source:



Product series

AP-MZ-0130A-15W



SURFACE LED
CEILING LIGHT

TECHNICAL SPECIFICATIONS

Input (Optional)	220-240V~50/60 Hz
Maximum Wattage	15W±10% Max


Number of LEDs
1 LEDs COB

Luminous Flux
626LM (3000K)

Main Material
Aluminum & PC

Color Temperature
3000K / 4000K / 6500K

CRI	≥90
Power Factor	≥0.55
Working Temperature	-10°C~45°C
Beam Angle (Adjustable)	110°
Fixture Dimmable	Non-dimmable
Electrical	Internal Driver
Protection class	IP65

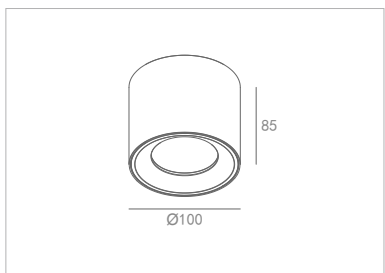

Especially designed for:

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.



Product Model No.	AP-MZ-0130A-15W	
Packaging Detail	41×28×32cm	
	STD PKG	16pcs
	N.W	10.56kgs
	G.W	12.56kgs

AP-MZ-0130A-15W

15W LED 3000K 626lm / incl. MEGALUX Driver SEC: Constant Current: DC350mA
DC28-42V DC / PRI: 220-240 V~ 50/60 Hz 0.2A




Warm White 3000K ∠110°

1m	277.92lx	233.76cm
2m	69.48lx	467.51cm
3m	30.88lx	701.27cm
4m	17.37lx	935.03cm
5m	11.12lx	1168.78cm

cd	Height	illuminance	Diameter
----	--------	-------------	----------

Option colors




Various Brand of COB LED Light Source:



SURFACE LED
CEILING LIGHT

TECHNICAL SPECIFICATIONS	
Input (Optional)	220-240V~50/60 Hz
Maximum Wattage	20W±10% Max
Number of LEDs	
1 LEDs COB	
Luminous Flux	
777LM (3000K)	
Main Material	
Aluminum & PC	
Color Temperature	
3000K / 4000K / 6500K	

CRI	≥90
Power Factor	≥0.55
Working Temperature	-10°C~45°C
Beam Angle (Adjustable)	110°
Fixture Dimmable	Non-dimmable
Electrical	Internal Driver
Protection class	IP65

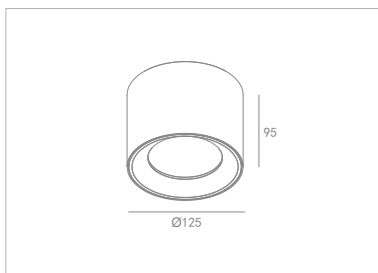

Especially designed for:

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.



Product Model No.	AP-MZ-0131A-20W	
Packaging Detail	33×32.5×35cm	
	STD PKG	12pcs
	N.W	11.64kgs
	G.W	13.64kgs

AP-MZ-0131A-20W


20W LED 3000K 777lm / incl. MEGALUX Driver SEC: Constant Current: DC500mA
DC28-42V DC / PRI: 220-240 V~ 50/60 Hz 0.15A



Warm White 3000K ∠110°

	1m	339.60lx	239.20cm
	2m	84.90lx	478.39cm
	3m	37.73lx	717.59cm
	4m	21.22lx	956.79cm
	5m	13.58lx	1195.99cm
	cd	Height	illuminance Diameter

Option colors



Various Brand of COB LED Light Source:



Product series


AP-MZ-0140B



SURFACE LED
CEILING LIGHT

TECHNICAL SPECIFICATIONS	
Input (Optional)	220-240V~50/60 Hz
Maximum Wattage	7W±10% Max
Number of LEDs	
1 LEDs COB	
Luminous Flux	
595LM (2700K)	
Main Material	
Aluminum & PC Lens Diffuser	
Color Temperature	
2700K	

CRI	≥80
Power Factor	≥0.8
Working Temperature	-10°C~45°C
Beam Angle (Optional)	40°
Fixture Dimmable	Non-dimmable
Electrical	Internal Driver
Protection class	IP65

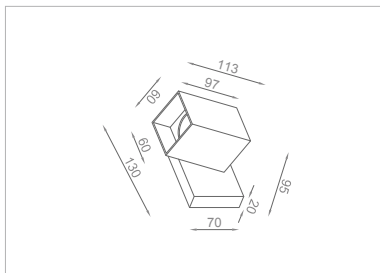

Especially designed for:

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.



Product Model No.	AP-MZ-0146B	
Packaging Detail	33×32.5×35cm	
	STD PKG	12pcs
	N.W	11.64kgs
	G.W	13.64kgs

AP-MZ-0146B

7W LED 2700K 595lm / incl. MEGALUX Driver SEC: Constant Current: 220-240 V~ 50/60 Hz 0.052A



Warm White 2700K ∠ 40°

1m	1396.80lx	35.63cm
2m	349.20lx	71.25cm
3m	155.20lx	106.88 cm
4m	87.30lx	142.50 cm
5m	55.87lx	178.13 cm

cd Height illuminance Diameter

Various Brand of COB LED Light Source:

OSRAM	PHILIPS	LUMENS	EPISTAR	CITIZEN	LUMENUS	DISON	SAMSUNG	BRIDGELUX	LG
-------	---------	--------	---------	---------	---------	-------	---------	-----------	----

Product series


AP-MZ-0141B



SURFACE LED
CEILING LIGHT

TECHNICAL SPECIFICATIONS	
Input (Optional)	220-240V~50/60 Hz
Maximum Wattage	14W±10% Max
Number of LEDs	
2 LEDs COB	
Luminous Flux	
1190LM (2700K)	
Main Material	
Aluminum & PC Lens Diffuser	
Color Temperature	
2700K	

CRI	≥80
Power Factor	≥0.8
Working Temperature	-10°C~45°C
Beam Angle (Optional)	40°
Fixture Dimmable	Non-dimmable
Electrical	Internal Driver
Protection class	IP65

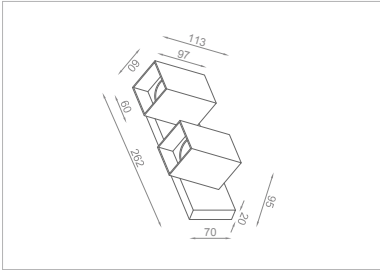

Especially designed for:
Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.



Product Model No.	AP-MZ-0147B
Packaging Detail	33×32.5×35cm
STD PKG	12pcs
N.W	11.64kgs
G.W	13.64kgs

AP-MZ-0147B

14W LED 2700K 1190lm / incl. MEGALUX Driver SEC: Constant Current: 220-240 V~ 50/60 Hz 0.052A



Warm White 2700K ∠ 40°

1m	1396.80lx	35.63cm
2m	349.20lx	71.25cm
3m	155.20lx	106.88 cm
4m	87.30lx	142.50 cm
5m	55.87lx	178.13 cm

cd	Height	illuminance	Diameter
----	--------	-------------	----------

Various Brand of COB LED Light Source:

OSRAM	PHILIPS	LUMENS	EPISTAR	CITIZEN	LUMENUS	DISON	SAMSUNG	BRIDGELUX	LG
-------	---------	--------	---------	---------	---------	-------	---------	-----------	----

Product series


AP-MZ-0142B



SURFACE LED
CEILING LIGHT

TECHNICAL SPECIFICATIONS	
Input (Optional)	220-240V~50/60 Hz
Maximum Wattage	21W±10% Max
Number of LEDs	
3 LEDs COB	
Luminous Flux	
1785LM (2700K)	
Main Material	
Aluminum & PC Lens Diffuser	
Color Temperature	
2700K	

CRI	≥80
Power Factor	≥0.8
Working Temperature	-10°C~45°C
Beam Angle (Optional)	40°
Fixture Dimmable	Non-dimmable
Electrical	Internal Driver
Protection class	IP20

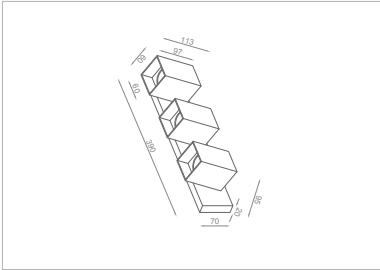

Especially designed for:
Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.




Product Model No.	AP-MZ-0148B
Packaging Detail	46×27×36.5cm
STD PKG	24pcs
N.W	11.52kgs
G.W	13.52kgs

AP-MZ-0148B
21W LED 2700K 1785lm / incl. MEGALUX Driver SEC: Constant Current: 220-240 V~ 50/60 Hz 0.052A



Warm White 2700K ∠ 40°

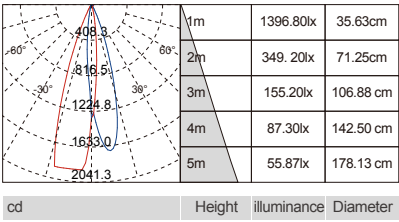

Various Brand of COB LED Light Source:



Product series

AP-MZ-0143B



SURFACE LED
CEILING LIGHT

TECHNICAL SPECIFICATIONS	
Input (Optional)	220-240V~50/60 Hz
Maximum Wattage	7W±10% Max
Number of LEDs	
1 LEDs COB	
Luminous Flux	
595LM (2700K)	
Main Material	
Aluminum & PC Lens Diffuser	
Color Temperature	
2700K	

CRI	≥80
Power Factor	≥0.8
Working Temperature	-10°C~45°C
Beam Angle (Optional)	40°
Fixture Dimmable	Non-dimmable
Electrical	Internal Driver
Protection class	IP20



Product Model No.	AP-MZ-0143B	
Packaging Detail	46×27×36.5cm	
	STD PKG	24pcs
	N.W	11.52kgs
	G.W	13.52kgs

AP-MZ-0143B

7W LED 2700K 595lm / incl. MEGALUX Driver SEC: Constant Current: 220-240 V~ 50/60 Hz 0.052A



Warm White 2700K ∠ 40°

	1m	1396.80lx	35.63cm
	2m	349.20lx	71.25cm
	3m	155.20lx	106.88 cm
	4m	87.30lx	142.50 cm
	5m	55.87lx	178.13 cm
cd	Height	illuminance	Diameter

Especially designed for:

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.



Various Brand of COB LED Light Source:



Product series

AP-MZ-0144B



SURFACE LED
CEILING LIGHT

TECHNICAL SPECIFICATIONS	
Input (Optional)	220-240V~50/60 Hz
Maximum Wattage	14W±10% Max

Number of LEDs	
2 LEDs COB	

Luminous Flux	
1190LM (2700K)	

Main Material	
Aluminum & PC Lens Diffuser	

Color Temperature	
2700K	

CRI	≥80
Power Factor	≥0.8
Working Temperature	-10°C~45°C
Beam Angle (Optional)	40°
Fixture Dimmable	Non-dimmable
Electrical	Internal Driver
Protection class	IP20



Product Model No.	AP-MZ-0144	
Packaging Detail	46×27×36.5cm	
	STD PKG	24pcs
	N.W	11.52kgs
	G.W	13.52kgs

AP-MZ-0144

14W LED 2700K 1190lm / incl. MEGALUX Driver SEC: Constant Current: 220-240 V~ 50/60 Hz 0.052A



Warm White 2700K ∠ 40°

	1m	1396.80lx	35.63cm
	2m	349.20lx	71.25cm
	3m	155.20lx	106.88 cm
	4m	87.30lx	142.50 cm
	5m	55.87lx	178.13 cm
cd	Height	illuminance	Diameter

Especially designed for:

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.




Various Brand of COB LED Light Source:



Product series

AP-MZ-0145B

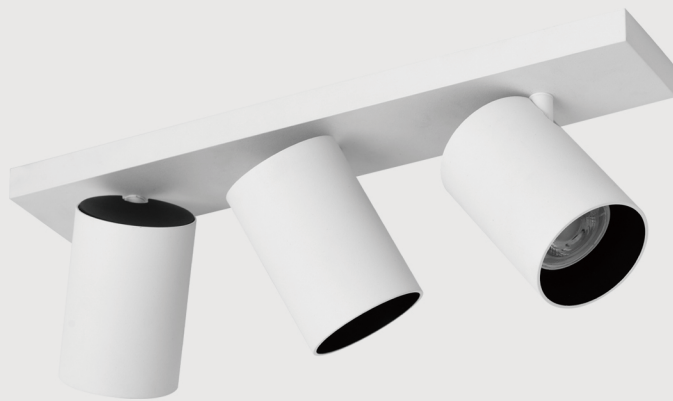

SURFACE LED
CEILING LIGHT

TECHNICAL SPECIFICATIONS	
Input (Optional)	220-240V~50/60 Hz
Maximum Wattage	21W±10% Max
Number of LEDs	
3 LEDs COB	
Luminous Flux	
1785LM (2700K)	
Main Material	
Aluminum & PC Lens Diffuser	
Color Temperature	
2700K	

CRI	≥80
Power Factor	≥0.8
Working Temperature	-10°C~45°C
Beam Angle (Optional)	40°
Fixture Dimmable	Non-dimmable
Electrical	Internal Driver
Protection class	IP20



Product Model No.	AP-MZ-0145B	
Packaging Detail	46×27×36.5cm	
	STD PKG	24pcs
	N.W	11.52kgs
	G.W	13.52kgs

AP-MZ-0145B

21W LED 2700K 1785lm / incl. MEGALUX Driver SEC: Constant Current: 220-240 V~50/60 Hz 0.052A



Warm White 2700K ∠ 40°

	1m	1396.80lx	35.63cm
	2m	349.20lx	71.25cm
	3m	155.20lx	106.88 cm
	4m	87.30lx	142.50 cm
	5m	55.87lx	178.13 cm
cd	Height	illuminance	Diameter

Especially designed for:

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.



Various Brand of COB LED Light Source:



Product series


AP-MZ-0146B



SURFACE LED
CEILING LIGHT

TECHNICAL SPECIFICATIONS	
Input (Optional)	220-240V~50/60 Hz
Maximum Wattage	7W±10% Max
Number of LEDs	
1 LEDs COB	
Luminous Flux	
595LM (2700K)	
Main Material	
Aluminum & PC Lens Diffuser	
Color Temperature	
2700K	

CRI	≥80
Power Factor	≥0.8
Working Temperature	-10°C~45°C
Beam Angle (Optional)	40°
Fixture Dimmable	Non-dimmable
Electrical	Internal Driver
Protection class	IP20

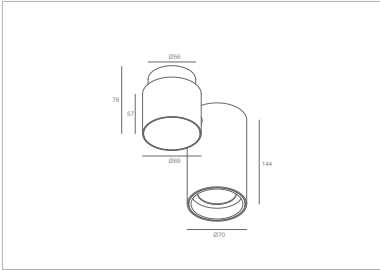

Especially designed for:
Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.



CE	UL	ETL	CCC	RoHS	REACH	IP20	LM78	LM79
Product Model No.		AP-MZ-0146B						
Packaging Detail		46×27×36.5cm						
		STD PKG	24pcs					
		N.W	11.52kgs					
		G.W	13.52kgs					

AP-MZ-0146B

7W LED 2700K 595lm / incl. MEGALUX Driver SEC: Constant Current: 220-240 V~ 50/60 Hz 0.052A



Warm White 2700K ∠ 40°

	1m	1396.80lx	35.63cm
	2m	349.20lx	71.25cm
	3m	155.20lx	106.88 cm
	4m	87.30lx	142.50 cm
	5m	55.87lx	178.13 cm
	6m	40.83lx	204.13 cm
cd	Height	illuminance	Diameter

Various Brand of COB LED Light Source:

OSRAM	PHILIPS	LUMENS	EPISTAR	CITIZEN	LUMENUS	DISON	SAMSUNG	trigolon	LG
-------	---------	--------	---------	---------	---------	-------	---------	----------	----

Product series


AP-MZ-0147B



SURFACE LED
CEILING LIGHT

TECHNICAL SPECIFICATIONS	
Input (Optional)	220-240V~50/60 Hz
Maximum Wattage	14W±10% Max
Number of LEDs	
2 LEDs COB	
Luminous Flux	
1190LM (2700K)	
Main Material	
Aluminum & PC Lens Diffuser	
Color Temperature	
2700K	

CRI	≥80
Power Factor	≥0.8
Working Temperature	-10°C~45°C
Beam Angle (Optional)	40°
Fixture Dimmable	Non-dimmable
Electrical	Internal Driver
Protection class	IP20

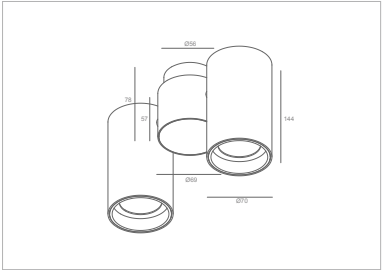

Especially designed for:
Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.



Product Model No.	AP-MZ-0147B
Packaging Detail	46×27×36.5cm
STD PKG	24pcs
N.W	11.52kgs
G.W	13.52kgs

AP-MZ-0147B
14W LED 2700K 1190lm / incl. MEGALUX Driver SEC: Constant Current: 220-240 V~50/60 Hz 0.052A



Warm White 2700K ∠ 40°

1m	1396.80lx	35.63cm
2m	349.20lx	71.25cm
3m	155.20lx	106.88 cm
4m	87.30lx	142.50 cm
5m	55.87lx	178.13 cm

cd	Height	illuminance	Diameter
----	--------	-------------	----------

Various Brand of COB LED Light Source:

OSRAM	PHILIPS	LUMENS	EPISTAR	CITIZEN	LUMENUS	DISON	SAMSUNG	trigee	LG
-------	---------	--------	---------	---------	---------	-------	---------	--------	----

Product series


AP-MZ-0148B



SURFACE LED
CEILING LIGHT

TECHNICAL SPECIFICATIONS	
Input (Optional)	220-240V~50/60 Hz
Maximum Wattage	21W±10% Max
Number of LEDs	
3 LEDs COB	
Luminous Flux	
1785LM (2700K)	
Main Material	
Aluminum & PC Lens Diffuser	
Color Temperature	
2700K	

CRI	≥80
Power Factor	≥0.8
Working Temperature	-10°C~45°C
Beam Angle (Optional)	40°
Fixture Dimmable	Non-dimmable
Electrical	Internal Driver
Protection class	IP20

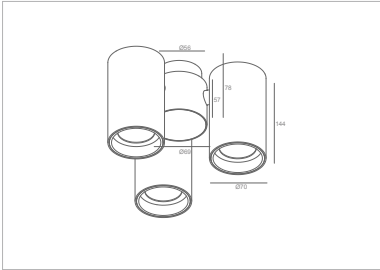

Especially designed for:
Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.



Product Model No.	AP-MZ-0148B
Packaging Detail	46×27×36.5cm
STD PKG	24pcs
N.W	11.52kgs
G.W	13.52kgs

AP-MZ-0148B

21W LED 2700K 1785lm / incl. MEGALUX Driver SEC: Constant Current: 220-240 V~ 50/60 Hz 0.052A



Warm White 2700K ∠ 40°

1m	1396.80lx	35.63cm
2m	349.20lx	71.25cm
3m	155.20lx	106.88 cm
4m	87.30lx	142.50 cm
5m	55.87lx	178.13 cm

cd	Height	illuminance	Diameter
----	--------	-------------	----------

Various Brand of COB LED Light Source:

OSRAM	PHILIPS	LUMENS	EPISTAR	CITIZEN	LUMENUS	DISON	SAMSUNG	BRIDGELUX	LG
-------	---------	--------	---------	---------	---------	-------	---------	-----------	----

Product series

AP-MZ-0150B



SURFACE LED
CEILING LIGHT

TECHNICAL SPECIFICATIONS	
Input (Optional)	220-240V~50/60 Hz
Maximum Wattage	7W±10% Max
Number of LEDs	
1 LEDs COB	
Luminous Flux	
595LM (2700K)	
Main Material	
Aluminum & PC Lens Diffuser	
Color Temperature	
2700K	

CRI	≥80
Power Factor	≥0.8
Working Temperature	-10°C~45°C
Beam Angle (Optional)	40°
Fixture Dimmable	Non-dimmable
Electrical	Internal Driver
Protection class	IP20




Product Model No.	AP-MZ-0150B	
Packaging Detail	46×27×36.5cm	
	STD PKG	24pcs
	N.W	11.52kgs
	G.W	13.52kgs

AP-MZ-0150B

7W LED 2700K 595lm / incl. MEGALUX Driver SEC: Constant Current: 220-240 V~ 50/60 Hz 0.052A



Warm White 2700K ∠ 40°

	1m	1396.80lx	35.63cm
	2m	349.20lx	71.25cm
	3m	155.20lx	106.88 cm
	4m	87.30lx	142.50 cm
	5m	55.87lx	178.13 cm
cd	Height	illuminance	Diameter

Especially designed for:

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.



Various Brand of COB LED Light Source:



Product series

AP-MZ-0151B



SURFACE LED
CEILING LIGHT

TECHNICAL SPECIFICATIONS	
Input (Optional)	220-240V~50/60 Hz
Maximum Wattage	7W±10% Max
Number of LEDs	
1 LEDs COB	
Luminous Flux	
595LM (2700K)	
Main Material	
Aluminum & PC Lens Diffuser	
Color Temperature	
2700K	

CRI	≥80
Power Factor	≥0.8
Working Temperature	-10°C~45°C
Beam Angle (Optional)	40°
Fixture Dimmable	Non-dimmable
Electrical	Internal Driver
Protection class	IP20



Product Model No.	AP-MZ-0150B	
Packaging Detail	46×27×36.5cm	
	STD PKG	24pcs
	N.W	11.52kgs
	G.W	13.52kgs

AP-MZ-0150B

7W LED 2700K 595lm / incl. MEGALUX Driver SEC: Constant Current: 220-240 V~ 50/60 Hz 0.052A



Warm White 2700K ∠ 40°

	1m	1396.80lx	35.63cm
	2m	349.20lx	71.25cm
	3m	155.20lx	106.88 cm
	4m	87.30lx	142.50 cm
	5m	55.87lx	178.13 cm
cd	Height	illuminance	Diameter

Especially designed for:

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.



Various Brand of COB LED Light Source:



Product series


AP-MZ-0170A-10W



SURFACE LED
CEILING LIGHT

TECHNICAL SPECIFICATIONS	
Input (Optional)	220-240V~50/60 Hz
Maximum Wattage	10W±10% Max
Number of LEDs	
1 LEDs COB	
Luminous Flux	
680LM (3000K)	
Main Material	
Aluminum & PC	
Color Temperature	
3000K / 4000K / 6500K	

CRI	≥90
Power Factor	≥0.55
Working Temperature	-10°C~45°C
Beam Angle (Adjustable)	15°-60°
Fixture Dimmable	Non-dimmable
Electrical	Internal Driver
Protection class	IP20

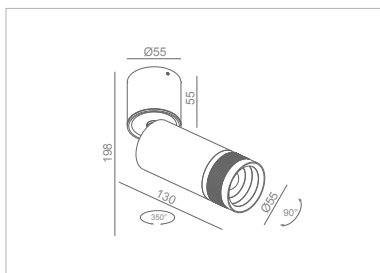

Especially designed for:

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.



Product Model No.	AP-MZ-0170A-10W	
Packaging Detail	46×27×36.5cm	
	STD PKG	24pcs
	N.W	11.52kgs
	G.W	13.52kgs

AP-MZ-0170A-10W

10W LED 3000K 680lm / incl. MEGALUX Driver SEC: Constant Current: DC250mA
DC28-42V DC / PRI: 220-240 V~ 50/60 Hz 0.15A



Warm White 3000K ∠15°

	1m	7649.07lx	24.03cm
	2m	1912.27lx	48.05cm
	3m	849.90lx	72.08cm
	4m	478.07lx	96.10cm
	5m	305.96lx	120.13cm
cd	Height	illuminance	Diameter

Option colors



Various Brand of COB LED Light Source:

OSRAM	PHILIPS	LUMENS	EPISTAR	CITIZEN	LUMINUS	DISON	SAMSUNG	BRIDGELUX	LG
-------	---------	--------	---------	---------	---------	-------	---------	-----------	----