

LED Linear Light

(126 Magnetic system G2)




- Easy install
- Modular design
- Linear style design
- Space lighting and directional lighting fusion




Applications

126 series can be freely assembled in different ways of lighting effects, continuous linear lighting, can also focus on the gap lighting, because it has a magnet function, so you can quickly install and replace.

126 Headliner can be used recessed, suspended and surface mounted.






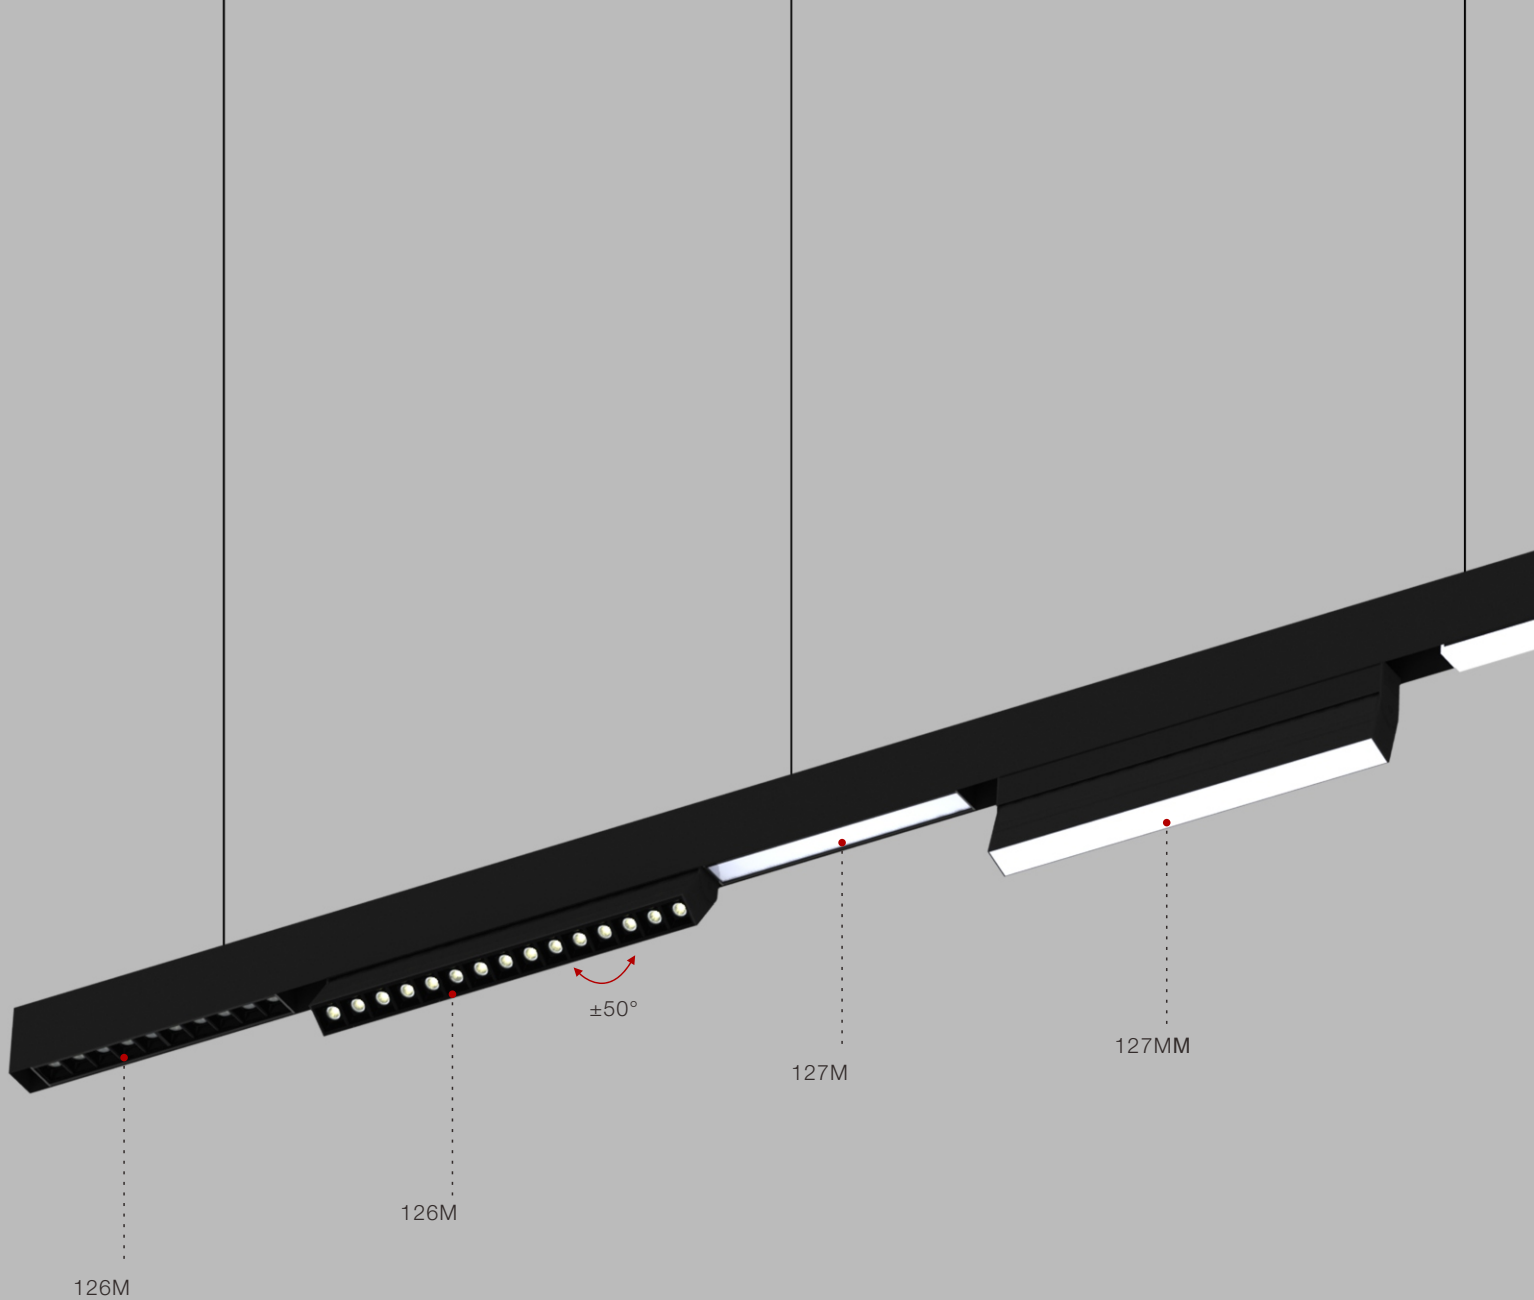

Changeable

126M series can be replaced to install a variety of lamps, to suit different environments.



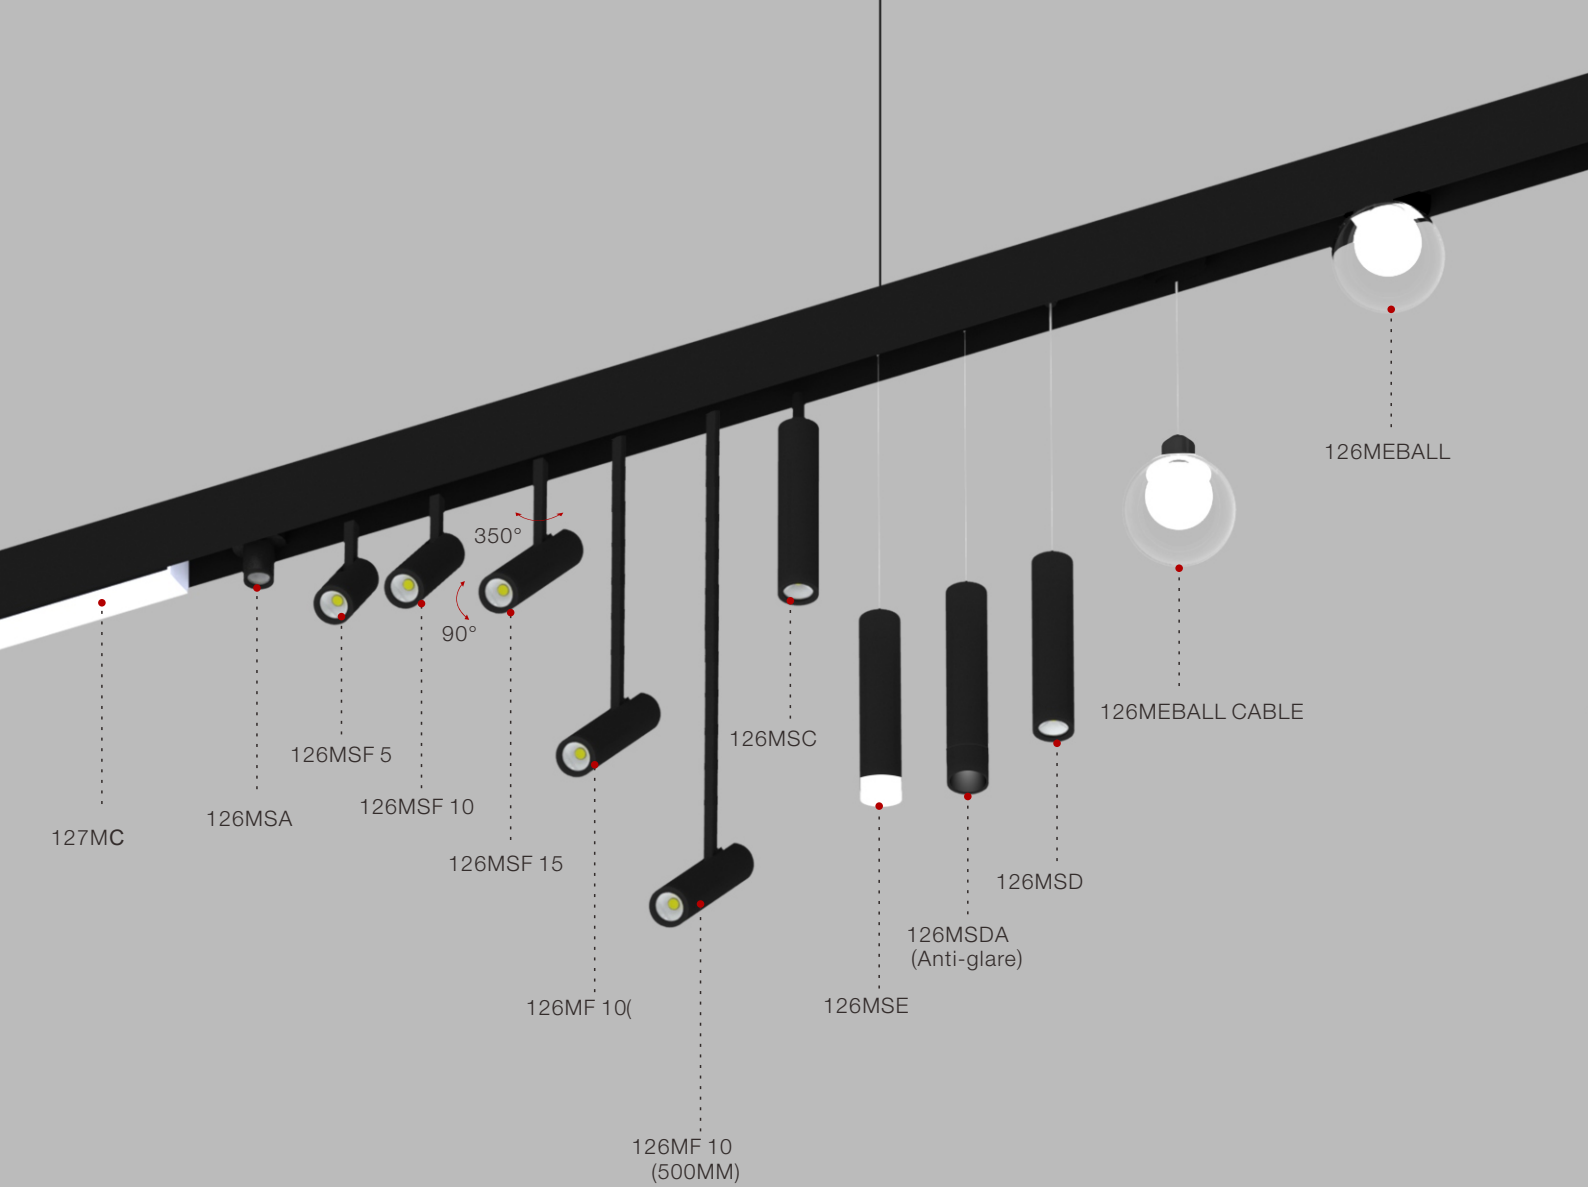

Analysis of Magnetic System Structure

- Safe and reliable, through the pull test.Easy maintenance, rapid replacement without tools.

Through  pull test
ReportNo.:50132428 001




Magnetics & Click
100% Safety




Test items and test requirements	Test instruction	Determination
Lamp head pull test: The pull of the lamp head out of the lamp base is at least 4 times the weight of the lamp base.	Lamp weight: 0.8kg 4 times the weight of the lamp head pull: 31.36N Lamp head pulls off from lamp holder: 34N for the first time 39N for the second time	Pass


- Magnetic linear light system operates with various kinds of lamps, meeting the needs of different applications.
- DC24V output, safety guarantee.

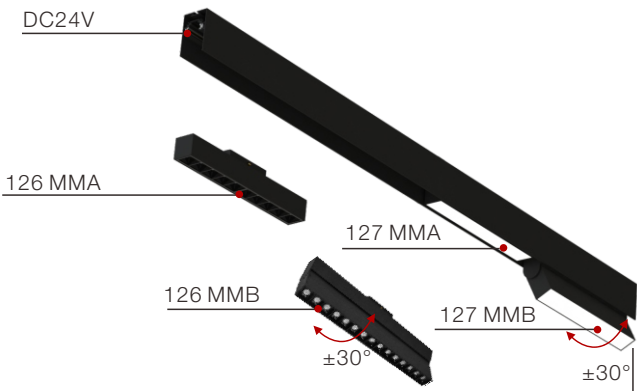


**SUSPENSION
(Pipe / line)**

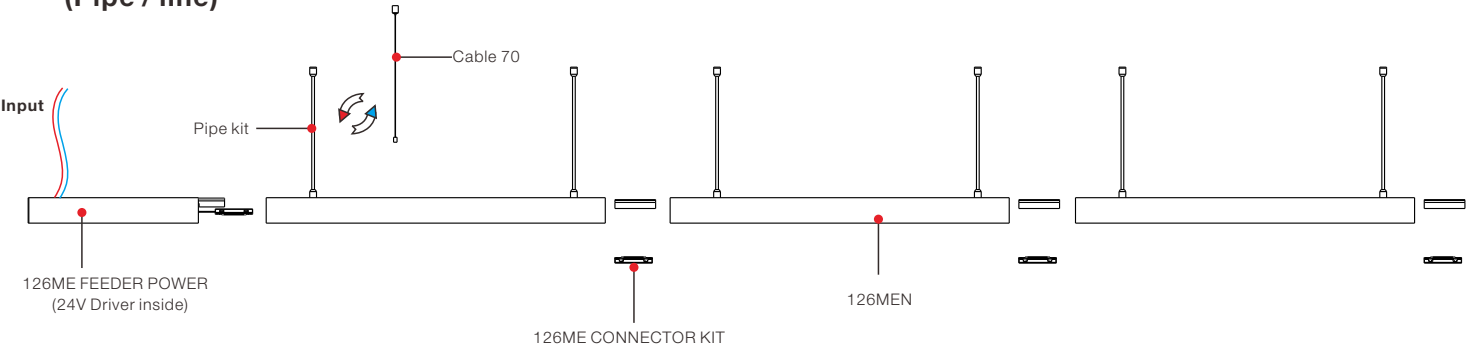

SURFACE

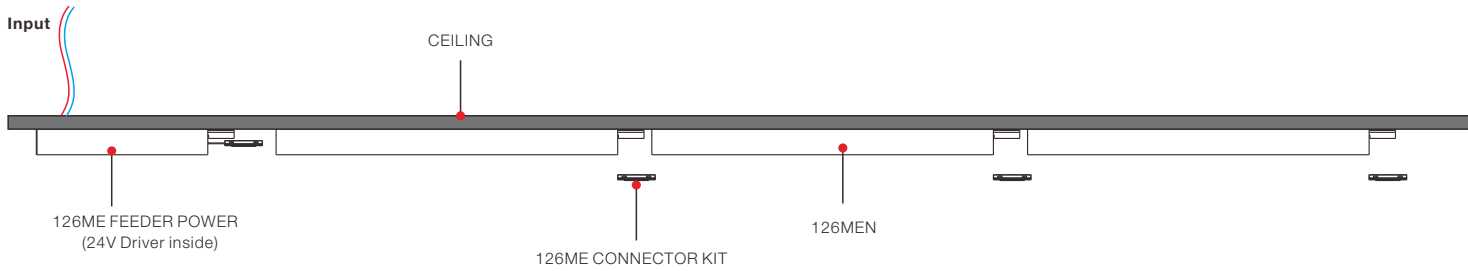

RECESSED

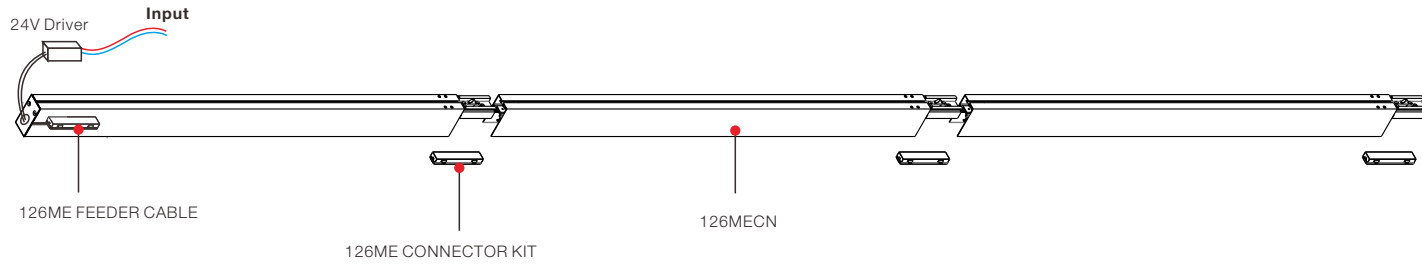

LIGHT MODULES



15W
CRI>90
Flicker free



22W
CRI>90
Flicker free




15W
CRI>90
Flicker free



22W
CRI>90
Flicker free




15W
CRI>90




45W
CRI>90




15W
CRI>90



22W
CRI>90



15W
CRI>90



22W
CRI>90



45W
CRI>90



126MMS 5W
5W
CRI>90
Flicker free



126MMS 15W
15W
CRI>90
Flicker free



126MSS 8 G2
126MSS 8 G2 Brass
126MSS 8
8W
CRI>90
Ultra narrow angle
Flicker free



126MSF.CIRCLE 5 G2
126MSF.CIRCLE 5 G2 Brass
126MSF.CIRCLE 5
5W
CRI>90
Flicker free



126MSF.CIRCLE 10 G2
126MSF.CIRCLE 10 G2 Brass
126MSF.CIRCLE 10
10W
CRI>90
Flicker free



126MSF.CIRCLE 15 G2
126MSF.CIRCLE 15 G2 Brass
126MSF.CIRCLE 15
15W
CRI>90
Flicker free



126BALL 5
5W
CRI>90



126BALL CABLE 5
5W
CRI>90



126MSA 5
5W
CRI>90

LIGHT MODULES



126MSF 5
5W
CRI>90



126MSF 10
10W
CRI>90



126MSF 15
15W
CRI>90



126MSC 10
10W
CRI>90



126MSD 10
10W
CRI>90



126MSDA 10
10W
CRI>90
Flicker free



126MSE 15
15W
CRI>90



126ME cone
5W
CRI>90




126ME cone cable
5W
CRI>90




Example of suspended installation

Appliance suitable for suspended, ceiling or semi-recessed installation; shown here in the single suspension version with sliding cables.







Kit for suspension with sliding cables.
Variable distancing between anchor points.



Example of the connection between linear

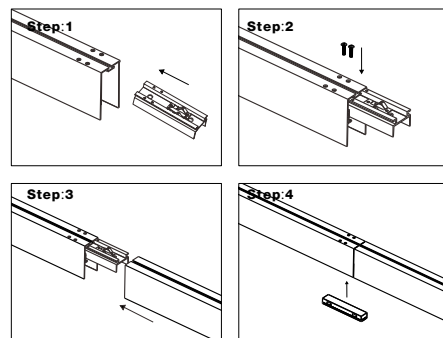

Installation




Dimmable


Thanks to the advancement of wireless technology and intelligent systems, we have upgraded the wireless operation of the lamps to a new level of technology. This smart dimming application can easily turn on or off the lighting fixtures and adjust the brightness through any smart device (such as a mobile phone, tablet computer, computer, or intelligent control panel) that carries Bluetooth functions.




Installation diagram

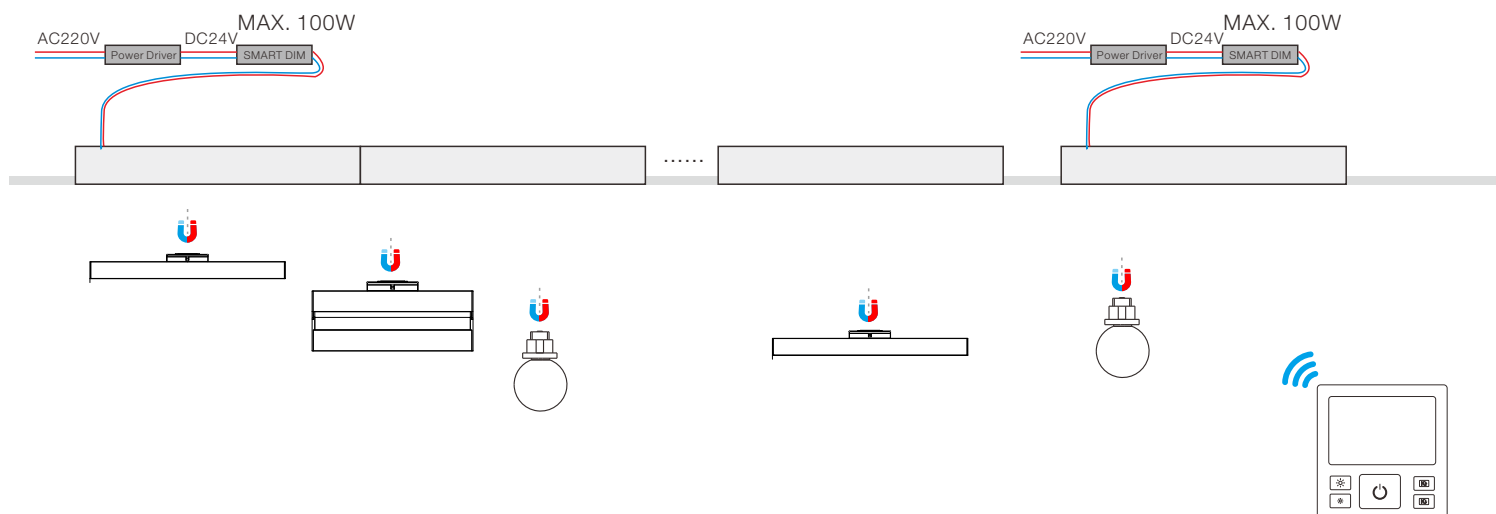


Dimming effect chart

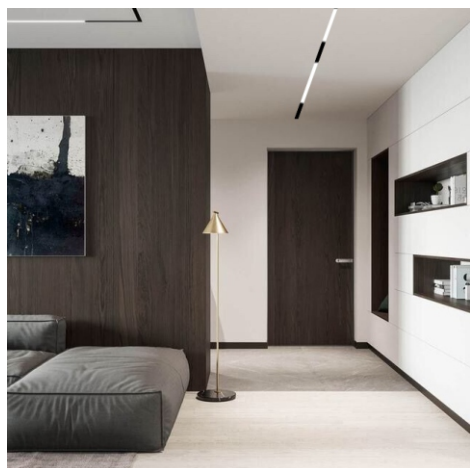

100%

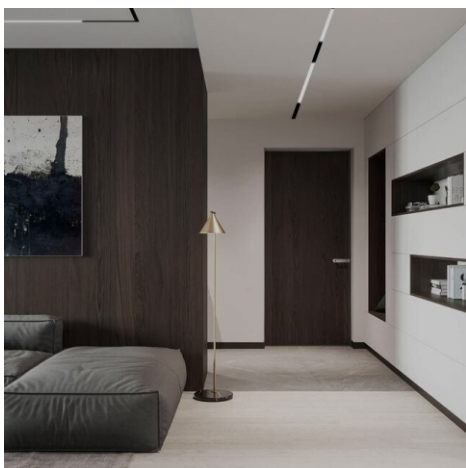

50%

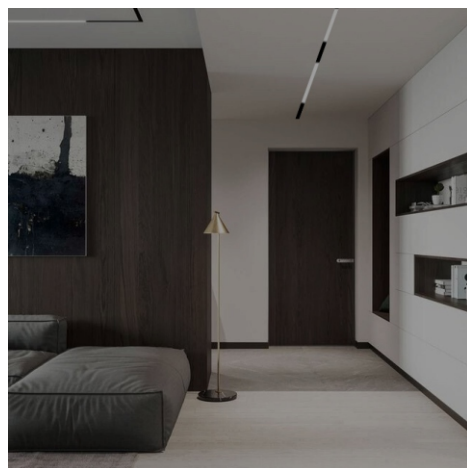


0%






This model can only do suspend or surface mounted

Installation exploded view

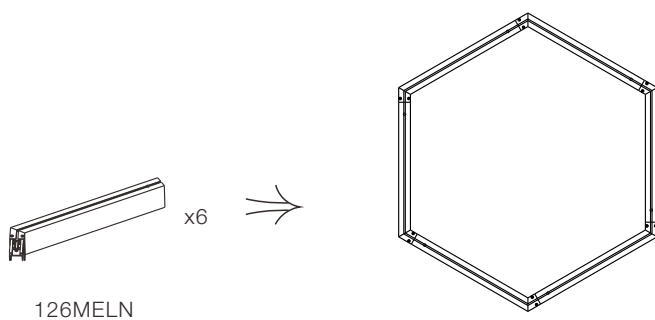




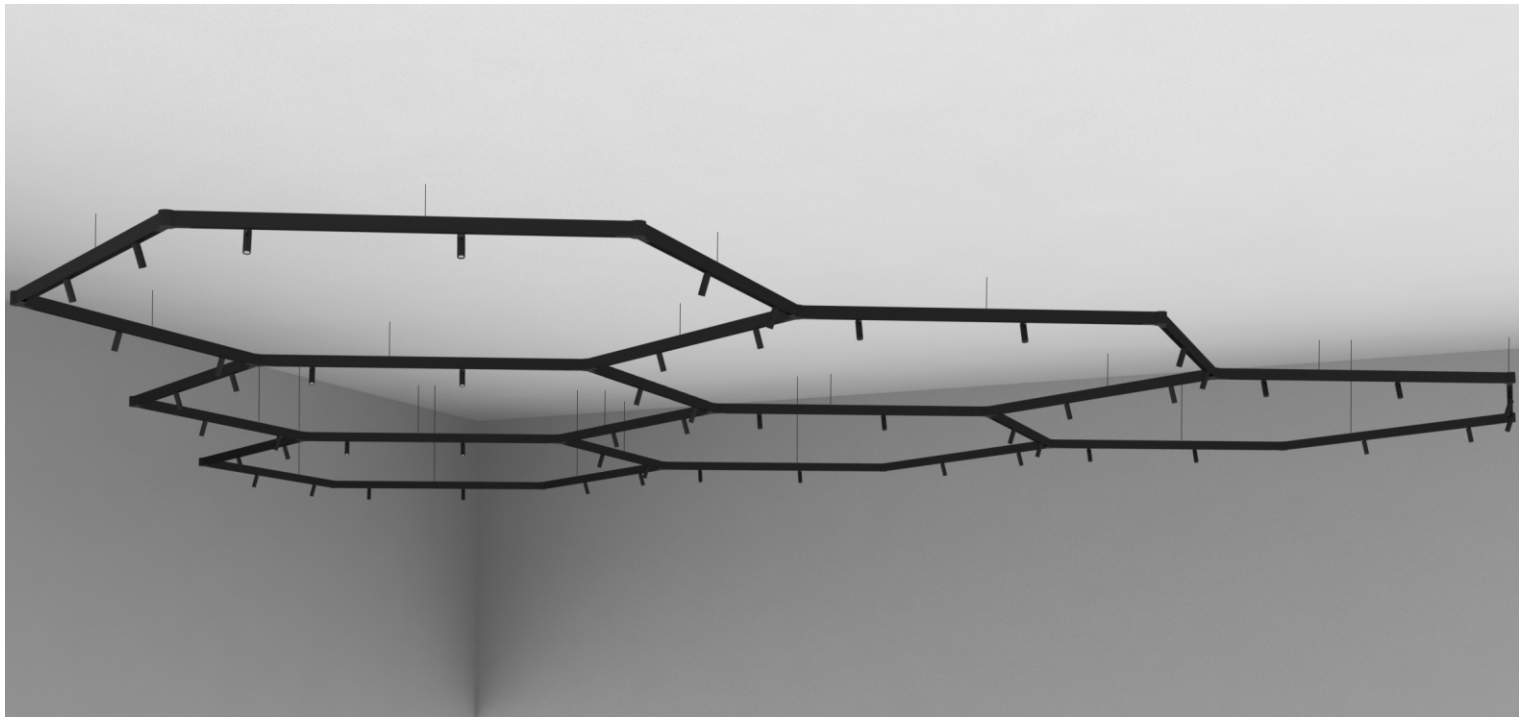

This model can only do suspend or surface mounted


Installation exploded view

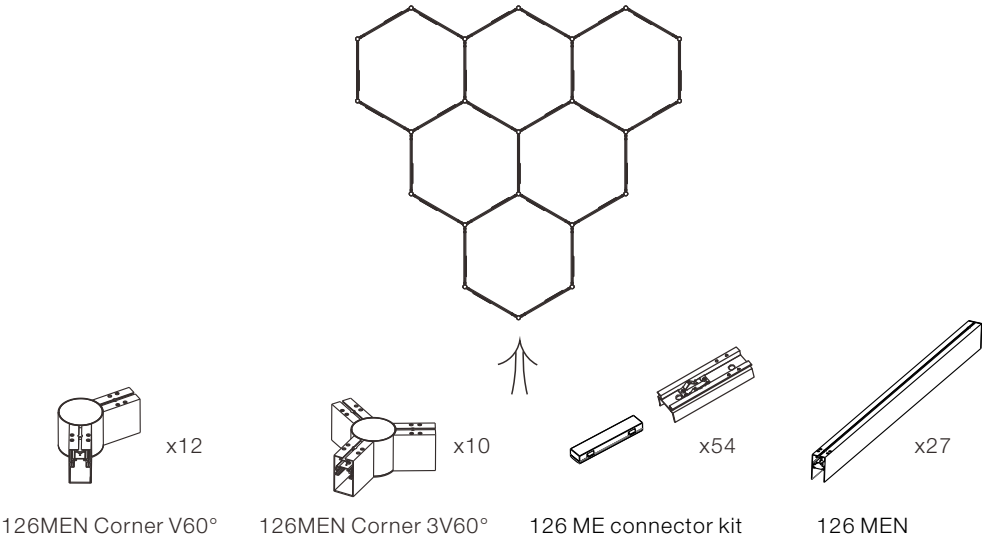



126ME MaGNETIC LINEAR LIGHTING SYSTEM

ASYMMETRICAL LIGHTING SOLUTIONS


127ASY

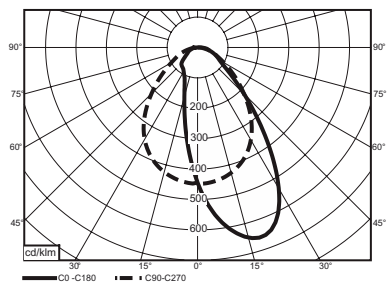

127DASY

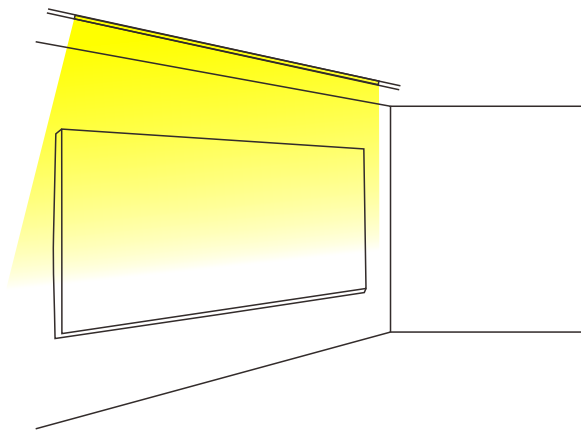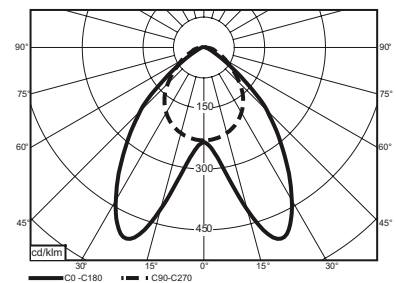


The design and application of single polarized optics in the art gallery. Continuous installation creates a perfect single-polarized wall-washing effect, making it easy for visitors to enjoy paintings in a comfortable lighting environment.

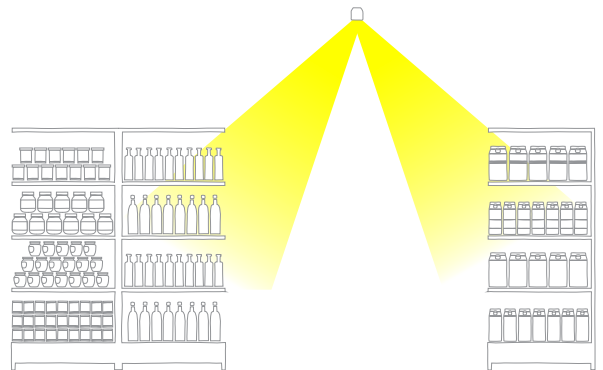


The design of dual polarized optical components in the central lane of the supermarket. Achieve the dual functions of comfortable general lighting and accent lighting during the customer purchase process. Special lenses transmit light laterally, reducing glare in the past, so that people's attention is focused on the shelf, and the customer's eyes focus on the displayed object to enhance the shopping experience.

Correct installation

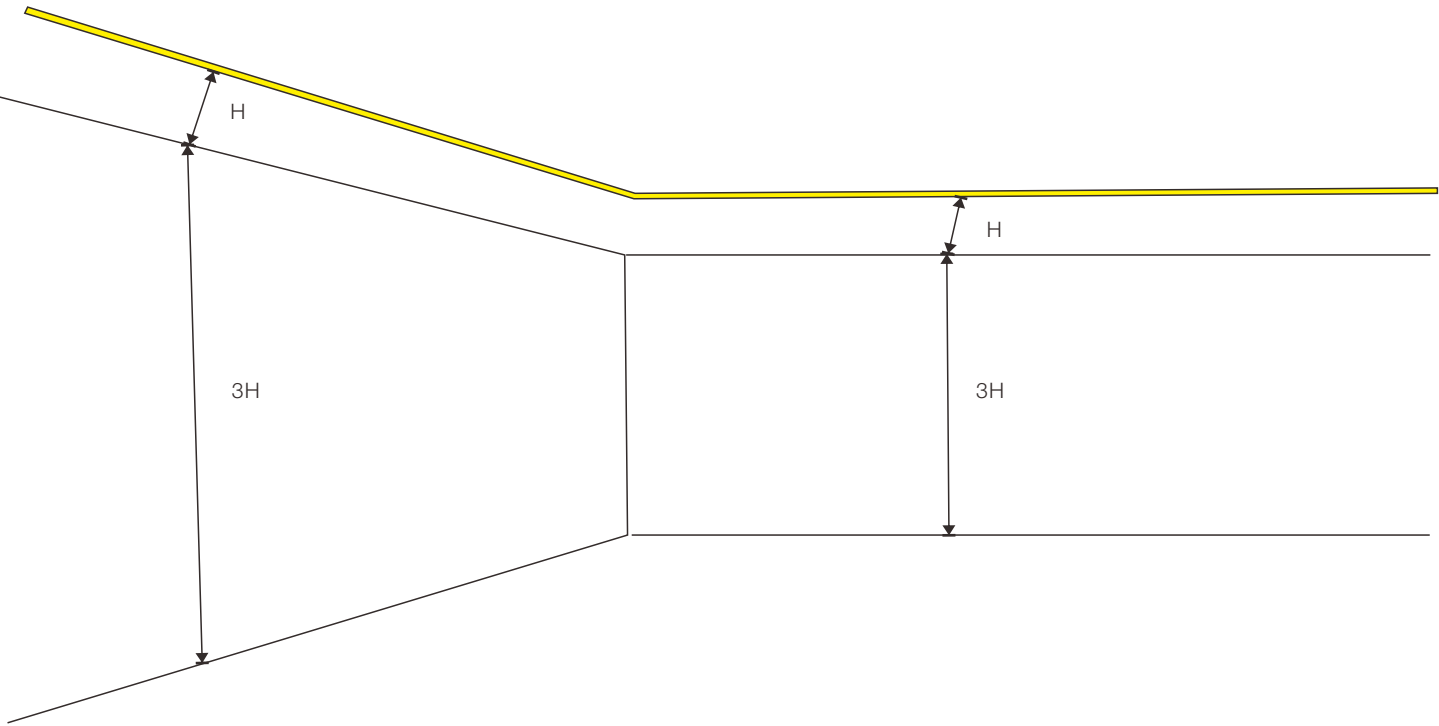


The table shows the correct installation distances for uniform lighting on the wall.



code	L (m)	h (m)
127ASY	1.5	4.5




127AS

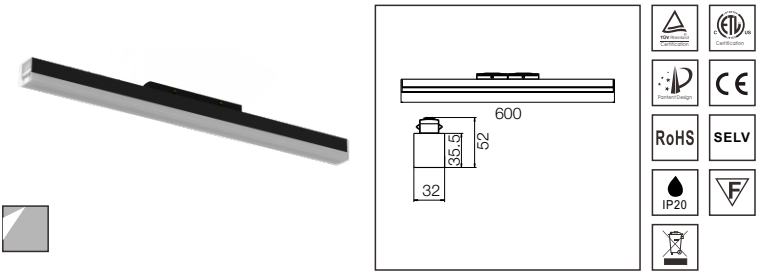

Power	20W
CCT	3000K 4000K 6500K
Voltage	DC24V
Output Lumens	1600lm
CRI	>80
Material	Aluminum
Color	Black
Life	30 000 H
Warranty	3 Years

LED 3000K

CODE:AA8888888




HEIGHT (m)	AVR E (lx)	CENTER E (lx)	DIAMETER (cm)
1.5	444	499	122
2	250	281	163
4	62	70	325
4.5	49	55	366
6	28	31	488

W Im Ra:

LED 4000K


CODE:AA8888888





HEIGHT (m)	AVR E (lx)	CENTER E (lx)	DIAMETER (cm)
1.5	427	605	160
2	240	340	214
4	60	85	428
4.5	47	67	481
6	27	38	642

26W 2078lm Ra:93


127 DAS

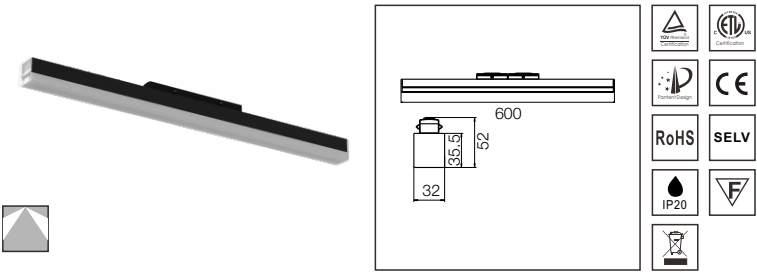

Power	20W
CCT	3000K 4000K 6500K
Voltage	DC24V
Output Lumens	1600lm
CRI	>80
Material	Aluminum
Color	Black
Life	30 000 H
Warranty	3 Years

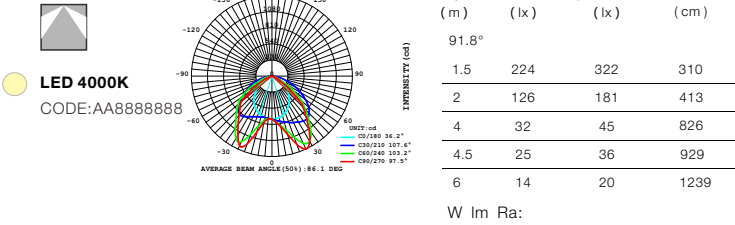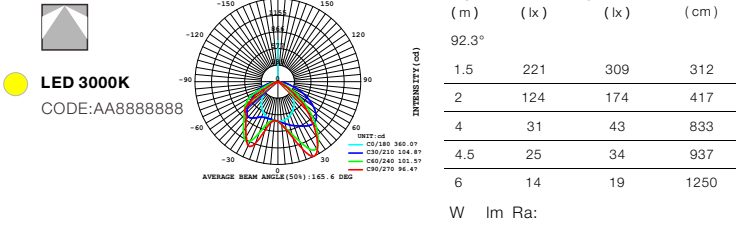


126MA 15 G2




Power	15W
CCT	3000K 4000K
Voltage	DC24V
Output Lumens	1200 lm
CRI	>80
Material	Aluminum
Color	Black
Life	30 000 H
Warranty	3 Years

126MA 15




Power	15W
CCT	3000K 4000K
Voltage	DC24V
Output Lumens	1200 lm
CRI	>80
Material	Aluminum
Color	Black
Life	30 000 H
Warranty	3 Years




HEIGHT (m)	AVR E (lx)	CENTER E (lx)	DIAMETER (cm)
1.5	861	1236	68
2	484	695	91
4	121	174	181
4.5	96	137	204
6	54	77	272

15.3W 900lm Ra:83




HEIGHT (m)	AVR E (lx)	CENTER E (lx)	DIAMETER (cm)
1.5	2338	3181	47
2	1315	1789	61
4	329	477	123
4.5	260	353	138
6	146	199	184

15.1W 1620lm Ra:95




HEIGHT (m)	AVR E (lx)	CENTER E (lx)	DIAMETER (cm)
1.5	1547	2200	64
2	870	1238	86
4	217	309	172
4.5	172	244	193
6	97	138	258

16.4W 979lm Ra:82




HEIGHT (m)	AVR E (lx)	CENTER E (lx)	DIAMETER (cm)
1.5	1214	1760	69
2	683	990	92
4	171	248	184
4.5	135	196	207
6	76	110	275

16W 831lm Ra:95



HEIGHT (m)	AVR E (lx)	CENTER E (lx)	DIAMETER (cm)
1.5	704	1040	106
2	396	585	141
4	99	146	281
4.5	78	116	317
6	44	65	422


16.4W 979lm Ra:82



HEIGHT (m)	AVR E (lx)	CENTER E (lx)	DIAMETER (cm)
1.5	645	935	105
2	363	526	140
4	91	132	281
4.5	72	104	316
6	40	58	421


16W 831lm Ra:95

0126MA 22 G2

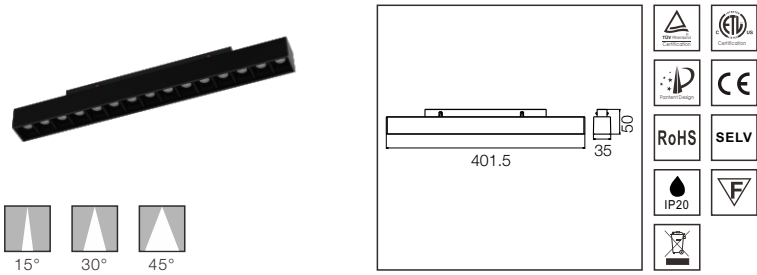


Power	22W
CCT	3000K 4000K
Voltage	DC24V
Output Lumens	1760 lm
CRI	>80
Material	Aluminum
Color	Black
Life	30 000 H
Warranty	3 Years


126MA 22

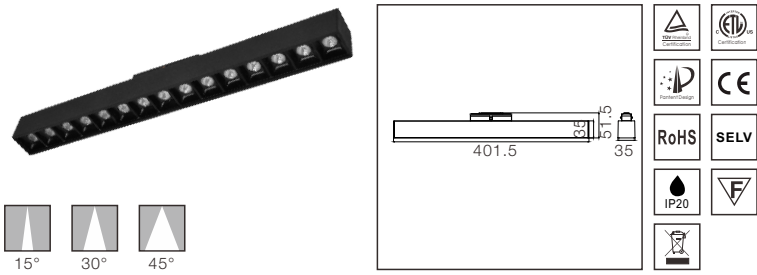



Power	22W
CCT	3000K 4000K
Voltage	DC24V
Output Lumens	1760 lm
CRI	>80
Material	Aluminum
Color	Black
Life	30 000 H
Warranty	3 Years




HEIGHT (m)	AVR E (lx)	CENTER E (lx)	DIAMETER (cm)
21.7°			
1.5	1505	2199	58
2	847	1237	77
4	212	309	153
4.5	167	244	173
6	94	137	230
21.8W 1383lm Ra:83			




HEIGHT (m)	AVR E (lx)	CENTER E (lx)	DIAMETER (cm)
30.4°			
1.5	1371	1988	82
2	771	1118	109
4	193	280	218
4.5	152	221	245
6	86	124	327
26.3W 1746lm Ra:82			




HEIGHT (m)	AVR E (lx)	CENTER E (lx)	DIAMETER (cm)
25.8°			
1.5	2234	3237	69
2	1257	1821	92
4	314	455	183
4.5	248	360	206
6	140	202	275
21.8W 1475lm Ra:83			



HEIGHT (m)	AVR E (lx)	CENTER E (lx)	DIAMETER (cm)
24.5°			
1.5	1832	2606	65
2	1030	1466	87
4	258	366	174
4.5	204	290	196
6	114	163	261
21W 1150lm Ra:95			




HEIGHT (m)	AVR E (lx)	CENTER E (lx)	DIAMETER (cm)
38°			
1.5	1212	1780	103
2	682	1001	138
4	170	250	276
4.5	135	198	310
6	76	111	413
21.8W 1475lm Ra:83			




HEIGHT (m)	AVR E (lx)	CENTER E (lx)	DIAMETER (cm)
39°			
1.5	969	1425	106
2	545	802	142
4	136	200	284
4.5	108	158	319
6	61	89	425
21.8W 1475lm Ra:83			

126MB 15 G2

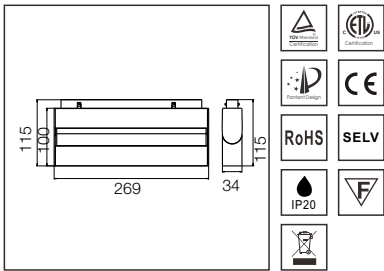


Power	15W
CCT	3000K 4000K
Voltage	DC24V
Output Lumens	1200 lm
CRI	>80
Material	Aluminum
Color	Black
Life	30 000 H
Warranty	3 Years

126MB 15

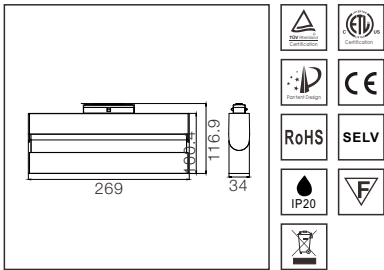


Power	15W
CCT	3000K 4000K
Voltage	DC24V
Output Lumens	1200 lm
CRI	>80
Material	Aluminum
Color	Black
Life	30 000 H
Warranty	3 Years





HEIGHT (m)	AVR E (lx)	CENTER E (lx)	DIAMETER (cm)
1.5	2459	3455	38
2	1383	1944	51
4	346	486	101
4.5	273	384	114
6	154	216	152

18.4W 973lm Ra:83




HEIGHT (m)	AVR E (lx)	CENTER E (lx)	DIAMETER (cm)
1.5	2462	3167	38
2	1385	1781	51
4	346	445	101
4.5	274	352	114
6	154	198	152

17.8W 1428lm Ra:81




HEIGHT (m)	AVR E (lx)	CENTER E (lx)	DIAMETER (cm)
1.5	1547	2200	64
2	870	1238	86
4	217	309	172
4.5	172	244	193
6	97	138	258

16.4W 979lm Ra:82




HEIGHT (m)	AVR E (lx)	CENTER E (lx)	DIAMETER (cm)
1.5	1214	1760	69
2	683	990	92
4	171	248	184
4.5	135	196	207
6	76	110	275

16W 831lm Ra:95



HEIGHT (m)	AVR E (lx)	CENTER E (lx)	DIAMETER (cm)
1.5	704	1040	106
2	396	585	141
4	99	146	281
4.5	78	116	317
6	44	65	422


16.4W 979lm Ra:82



HEIGHT (m)	AVR E (lx)	CENTER E (lx)	DIAMETER (cm)
1.5	645	935	105
2	363	526	140
4	91	132	281
4.5	72	104	316
6	40	58	421


16W 831lm Ra:95

126MB 22 G2




Power	22W
CCT	3000K 4000K
Voltage	DC24V
Output Lumens	1760 lm
CRI	>80
Material	Aluminum
Color	Black
Life	30 000 H
Warranty	3 Years

126MB 22




Power	22W
CCT	3000K 4000K
Voltage	DC24V
Output Lumens	1760 lm
CRI	>80
Material	Aluminum
Color	Black
Life	30 000 H
Warranty	3 Years





HEIGHT (m)	AVR E (lx)	CENTER E (lx)	DIAMETER (cm)
1.5	1529	2206	48
2	860	1241	65
4	215	310	129
4.5	170	245	145
6	96	138	194

21.9W 1383lm Ra:83




HEIGHT (m)	AVR E (lx)	CENTER E (lx)	DIAMETER (cm)
1.5	1735	2439	44
2	976	1372	58
4	244	343	116
4.5	193	271	131
6	108	152	174

21.7W 2774lm Ra:82




HEIGHT (m)	AVR E (lx)	CENTER E (lx)	DIAMETER (cm)
1.5	2234	3237	69
2	1257	1821	92
4	314	455	183
4.5	248	360	206
6	140	202	275

21.8W 1475lm Ra:83




HEIGHT (m)	AVR E (lx)	CENTER E (lx)	DIAMETER (cm)
1.5	1832	2606	65
2	1030	1466	87
4	258	366	174
4.5	204	290	196
6	114	163	261

21W 1150lm Ra:95



HEIGHT (m)	AVR E (lx)	CENTER E (lx)	DIAMETER (cm)
1.5	1212	1780	103
2	682	1001	138
4	170	250	276
4.5	135	198	310
6	76	111	413


21.8W 1475lm Ra:83



HEIGHT (m)	AVR E (lx)	CENTER E (lx)	DIAMETER (cm)
1.5	969	1425	106
2	545	802	142
4	136	200	284
4.5	108	158	319
6	61	89	425


21.8W 1475lm Ra:83

127MA 15 G2




Power	15W
CCT	3000K 4000K
Voltage	DC24V
Output Lumens	1200 lm
CRI	>80
Material	Aluminum
Color	Black
Life	30 000 H
Warranty	3 Years


127MA 15



Power	15W
CCT	3000K 4000K
Voltage	DC24V
Output Lumens	1200 lm
CRI	>80
Material	Aluminum
Color	Black
Life	30 000 H
Warranty	3 Years




HEIGHT (m)	AVR E (lx)	CENTER E (lx)	DIAMETER (cm)
99.3°			
1.5	13	34	353
2	7	19	471
4	2	5	941
4.5	2	4	1059
6	1	2	1412



HEIGHT (m)	AVR E (lx)	CENTER E (lx)	DIAMETER (cm)
97.9°			
1.5	39	102	345
2	22	57	459
4	6	14	919
4.5	4	11	1034
6	2	6	1378





127MA 22 G2

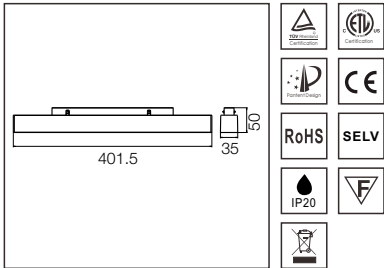

Power	22W
CCT	3000K 4000K
Voltage	DC24V
Output Lumens	1760 lm
CRI	>80
Material	Aluminum
Color	Black
Life	30 000 H
Warranty	3 Years


127MA 22

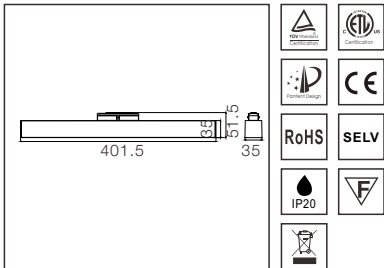

Power	22W
CCT	3000K 4000K
Voltage	DC24V
Output Lumens	1760 lm
CRI	>80
Material	Aluminum
Color	Black
Life	30 000 H
Warranty	3 Years



LED 3000K
CODE:AA8888888




HEIGHT (m)	AVR E (lx)	CENTER E (lx)	DIAMETER (cm)
100°			
1.5	51	134	358
2	29	75	477
4	7	19	954
4.5	6	15	1073
6	3	8	1431

17.6W 439lm Ra:84




LED 4000K
CODE:AA8888888




HEIGHT (m)	AVR E (lx)	CENTER E (lx)	DIAMETER (cm)
109.2°			
1.5	44	137	422
2	25	77	563
4	6	19	1126
4.5	5	15	1266
6	3	9	1689

26.8W 943lm Ra:80


127MA 45 G2

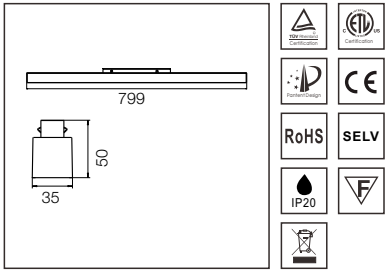

Power	45W
CCT	3000K 4000K
Voltage	DC24V
Output Lumens	3600 lm
CRI	>80
Material	Aluminum
Color	Black
Life	30 000 H
Warranty	3 Years




HEIGHT (m)	AVR E (lx)	CENTER E (lx)	DIAMETER (cm)
103°			
1.5	104	292	377
2	58	164	503
4	15	41	1005
4.5	12	32	1131
6	7	18	1508
45.5W 1665lm Ra:93			




HEIGHT (m)	AVR E (lx)	CENTER E (lx)	DIAMETER (cm)
108.8°			
1.5	133	417	419
2	75	234	559
4	19	59	1117
4.5	15	46	1257
6	8	26	1676
45.5W 1665lm Ra:93			

127MB 15 G2




Power	15W
CCT	3000K 4000K
Voltage	DC24V
Output Lumens	1200 lm
CRI	>80
Material	Aluminum
Color	Black
Life	30 000 H
Warranty	3 Years


127MB 15



Power	15W
CCT	3000K 4000K
Voltage	DC24V
Output Lumens	1200 lm
CRI	>80
Material	Aluminum
Color	Black
Life	30 000 H
Warranty	3 Years




HEIGHT (m)	AVR E (lx)	CENTER E (lx)	DIAMETER (cm)
109.2°			
1.5	11	34	422
2	6	19	563
4	2	5	1126
4.5	1	4	1266
6	0.7	2	1689
16.3W 389lm Ra:84			




HEIGHT (m)	AVR E (lx)	CENTER E (lx)	DIAMETER (cm)
107.5°			
1.5	29	87	409
2	16	49	545
4	4	12	1091
4.5	3	10	1227
6	2	5	1636
15.7W 955lm Ra:82			

127MB 22 G2




Power	22W
CCT	3000K 4000K
Voltage	DC24V
Output Lumens	1760 lm
CRI	>80
Material	Aluminum
Color	Black
Life	30 000 H
Warranty	3 Years

127MB 22




Power	22W
CCT	3000K 4000K
Voltage	DC24V
Output Lumens	1760 lm
CRI	>80
Material	Aluminum
Color	Black
Life	30 000 H
Warranty	3 Years



HEIGHT (m)	AVR E (lx)	CENTER E (lx)	DIAMETER (cm)
100°			
1.5	51	134	358
2	29	75	477
4	7	19	954
4.5	6	15	1073
6	3	8	1431



19.5W 524lm Ra:93



HEIGHT (m)	AVR E (lx)	CENTER E (lx)	DIAMETER (cm)
109.2°			
1.5	44	137	422
2	25	77	563
4	6	19	1126
4.5	5	15	1266
6	3	9	1689



26.8W 943lm Ra:80

127MC 15 G2

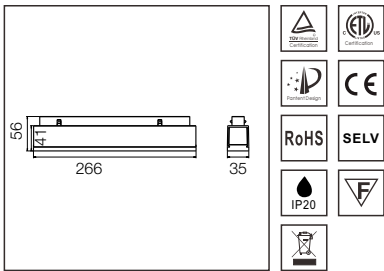


Power	15W	
CCT	3000K	4000K
Voltage	DC24V	
Output Lumens	1200 lm	
CRI	>80	
Material	Aluminum	
Color	Black	
Life	30 000 H	
Warranty	3 Years	


127MC 15

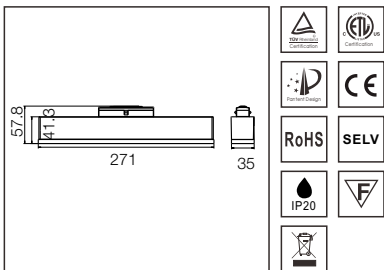

Power	15W	
CCT	3000K	4000K
Voltage	DC24V	
Output Lumens	1200 lm	
CRI	>80	
Material	Aluminum	
Color	Black	
Life	30 000 H	
Warranty	3 Years	




HEIGHT (m)	AVR E (lx)	CENTER E (lx)	DIAMETER (cm)
100°			
1.5	52	117	309
2	29	66	412
4	7	17	824
4.5	6	13	927
6	3	7	1236
16.4W 432lm Ra:93			




HEIGHT (m)	AVR E (lx)	CENTER E (lx)	DIAMETER (cm)
109.2°			
1.5	20	73	486
2	11	41	648
4	3	10	1296
4.5	2	8	1458
6	1	5	1944
18.3W 649lm Ra:81			

127MC 22 G2



Power	22W
CCT	3000K 4000K
Voltage	DC24V
Output Lumens	1760 lm
CRI	>80
Material	Aluminum
Color	Black
Life	30 000 H
Warranty	3 Years


127MC 22



Power	22W
CCT	3000K 4000K
Voltage	DC24V
Output Lumens	1760 lm
CRI	>80
Material	Aluminum
Color	Black
Life	30 000 H
Warranty	3 Years



LED 3000K
CODE:AA8888888




HEIGHT (m)	AVR E (lx)	CENTER E (lx)	DIAMETER (cm)
1.5	14	47	457
2	8	27	609
4	2	7	1219
4.5	2	5	1371
6	1	3	1828

19.2W 553lm Ra:83




LED 4000K
CODE:AA8888888





HEIGHT (m)	AVR E (lx)	CENTER E (lx)	DIAMETER (cm)
1.5	32	104	450
2	18	59	599
4	4	15	1199
4.5	4	12	1348
6	2	7	1798

26.9W 920lm Ra:80


127MC 45 G2

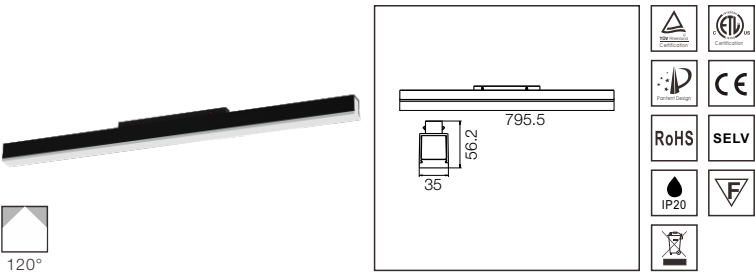

Power	12W
CCT	3000K 4000K
Voltage	DC24V
Output Lumens	3600 lm
CRI	>80
Material	Aluminum
Color	Black
Life	30 000 H
Warranty	3 Years

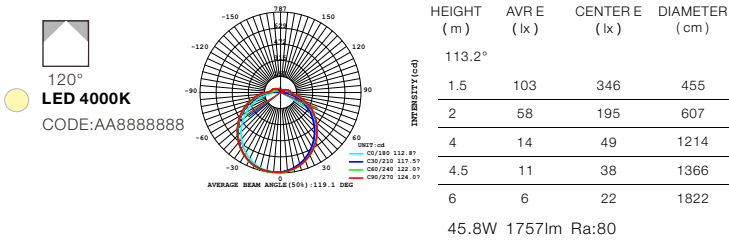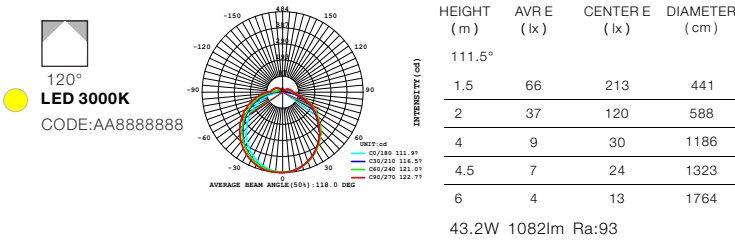


126MS 5W

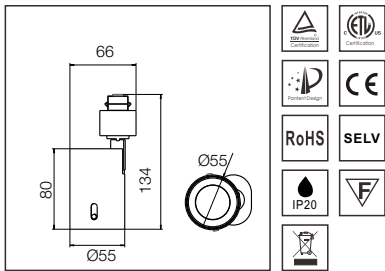


Power	5W
CCT	3000K ● 4000K ●
Voltage	DC24V
Output Lumens	400 lm
CRI	>90
Material	Aluminum
Color	Black
Life	30 000 H
Warranty	3 Years

126MS 15W

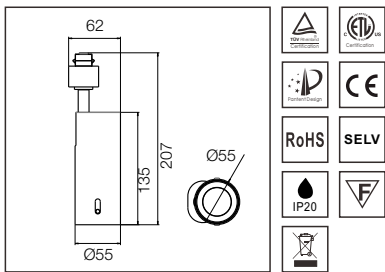



Power	15W
CCT	3000K ● 4000K ●
Voltage	DC24V
Output Lumens	1200 lm
CRI	>90
Material	Aluminum
Color	Black
Life	30 000 H
Warranty	3 Years

126MS 8 G2

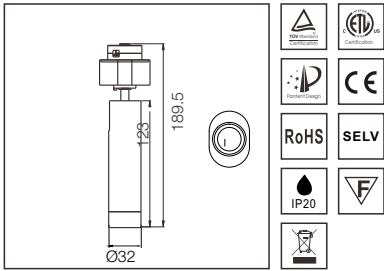


Power	8W
CCT	3000K 4000K
Voltage	DC24V
Output Lumens	640 lm
CRI	>90
Material	Aluminum
Color	Black / White
Life	30 000 H
Warranty	3 Years

126MS 8 G2 Brass

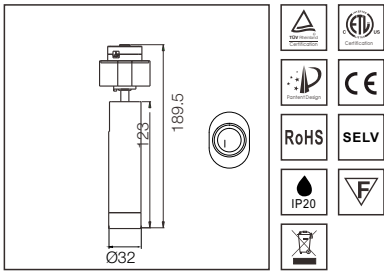


Power	8W
CCT	3000K 4000K
Voltage	DC24V
Output Lumens	640 lm
CRI	>90
Material	Aluminum
Color	Black / White
Life	30 000 H
Warranty	3 Years

126MS 8

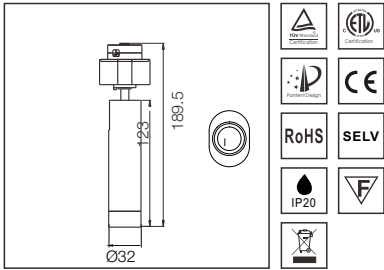

Power	8W
CCT	3000K 4000K
Voltage	DC24V
Output Lumens	640 lm
CRI	>90
Material	Aluminum
Color	Black
Life	30 000 H
Warranty	3 Years


10°
LED 3000K
CODE:AA8888888



HEIGHT (m)	AVR E (lx)	CENTER E (lx)	DIAMETER (cm)
12.4°			
1.5	2499	3096	32
2	1406	1742	43
4	351	435	87
4.5	278	344	97
6	156	194	130

9.7W 278lm Ra:92



10°
LED 4000K
CODE:AA8888888



HEIGHT (m)	AVR E (lx)	CENTER E (lx)	DIAMETER (cm)
12.5°			
1.5	1105	1198	33
2	622	674	44
4	155	168	87
4.5	123	133	98
6	69	75	131



9.1W 293lm Ra:91

126MSIRCLE 5 G2

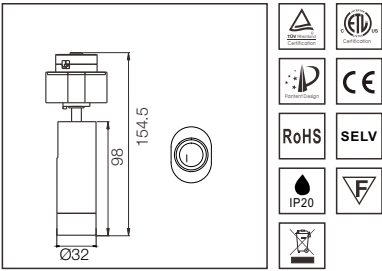



Power	5W
CCT	3000K 4000K
Voltage	DC24V
Output Lumens	400 lm
CRI	>90
Material	Aluminum
Color	Black / White
Life	30 000 H
Warranty	3 Years

126MSIRCLE 5 G2 Brass

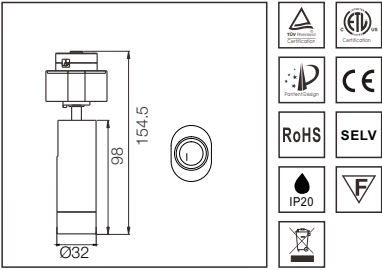


Power	5W
CCT	3000K 4000K
Voltage	DC24V
Output Lumens	400 lm
CRI	>90
Material	Aluminum
Color	Black / White
Life	30 000 H
Warranty	3 Years

126MSIRCLE 5

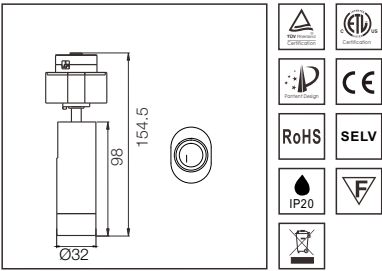


Power	5W
CCT	3000K 4000K
Voltage	DC24V
Output Lumens	400 lm
CRI	>90
Material	Aluminum
Color	Black
Life	30 000 H
Warranty	3 Years

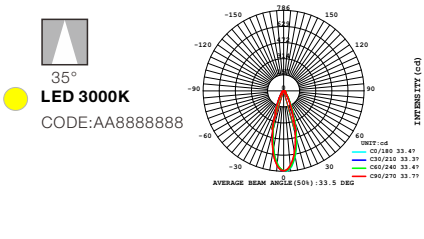


HEIGHT (m)	AVR E (lx)	CENTER E (lx)	DIAMETER (cm)
1.5	234	348	90
2	131	196	120
4	33	49	240
4.5	26	39	270
6	15	22	360

5.8W 241lm Ra:92

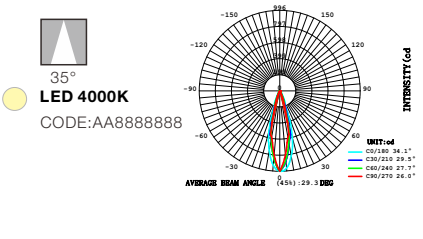


HEIGHT (m)	AVR E (lx)	CENTER E (lx)	DIAMETER (cm)
1.5	305	445	69
2	172	250	92
4	43	63	184
4.5	34	49	207
6	19	28	276

5.5W 535lm Ra:84

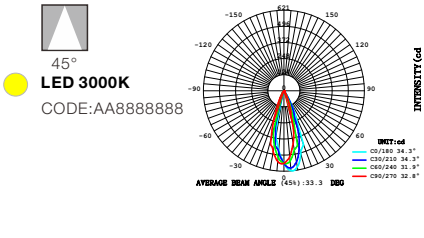

HEIGHT (m)	AVR E (lx)	CENTER E (lx)	DIAMETER (cm)
1.5	174	250	90
2	98	141	121
4	25	35	241
4.5	19	28	271
6	11	16	362


5.6W 231lm Ra:91

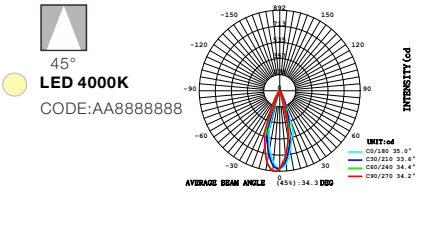

HEIGHT (m)	AVR E (lx)	CENTER E (lx)	DIAMETER (cm)
1.5	251	381	92
2	141	214	123
4	35	54	247
4.5	28	42	277
6	16	24	370



5.5W 215lm Ra:92

126MSIRCLE 10 G2

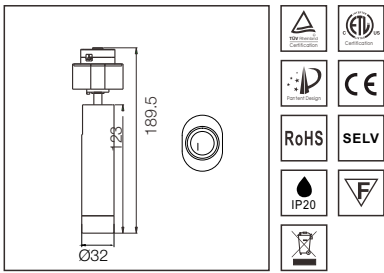


Power	10W
CCT	3000K 4000K
Voltage	DC24V
Output Lumens	800 lm
CRI	>90
Material	Aluminum
Color	Black / White
Life	30 000 H
Warranty	3 Years

126MSIRCLE 10 G2 Brass

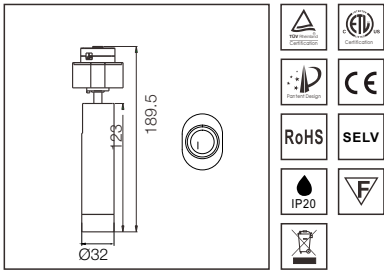


Power	10W
CCT	3000K 4000K
Voltage	DC24V
Output Lumens	800 lm
CRI	>90
Material	Aluminum
Color	Black / White
Life	30 000 H
Warranty	3 Years

126MSIRCLE 10

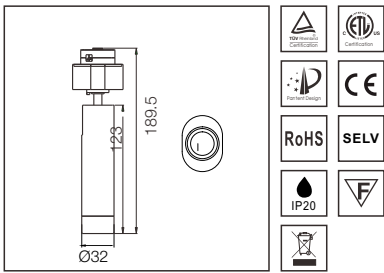


Power	10W
CCT	3000K 4000K
Voltage	DC24V
Output Lumens	800 lm
CRI	>90
Material	Aluminum
Color	Black
Life	30 000 H
Warranty	3 Years

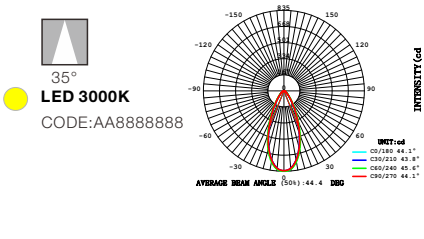


HEIGHT (m)	AVR E (lx)	CENTER E (lx)	DIAMETER (cm)
1.5	242	371	122
2	136	209	162
4	34	52	324
4.5	27	41	365
6	15	23	487

9.6W 686lm Ra:83

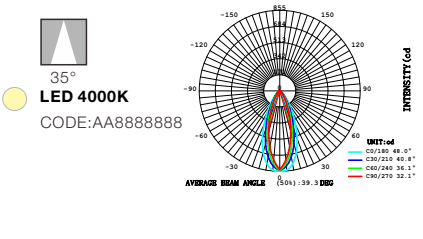


HEIGHT (m)	AVR E (lx)	CENTER E (lx)	DIAMETER (cm)
1.5	274	377	88
2	154	212	118
4	39	53	236
4.5	30	42	265
6	17	24	353

9.3W 823lm Ra:83

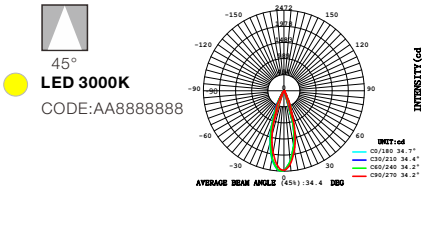

HEIGHT (m)	AVR E (lx)	CENTER E (lx)	DIAMETER (cm)
1.5	710	1091	93
2	400	614	124
4	100	153	248
4.5	79	121	279
6	44	68	372


6.6W 230lm Ra:91

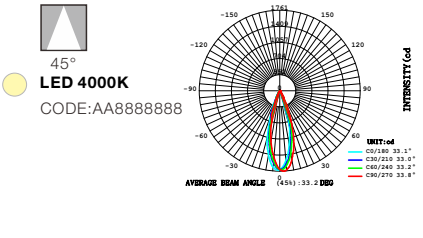

HEIGHT (m)	AVR E (lx)	CENTER E (lx)	DIAMETER (cm)
1.5	506	774	90
2	285	746	120
4	71	109	240
4.5	56	86	269
6	32	48	359


11.5W 378lm Ra:92

126MSIRCLE 15 G2

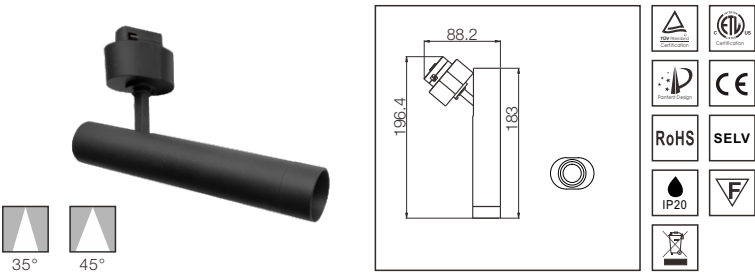


Power	15W
CCT	3000K 4000K
Voltage	DC24V
Output Lumens	1200 lm
CRI	>90
Material	Aluminum
Color	Black / White
Life	30 000 H
Warranty	3 Years

126MSIRCLE 15 G2 Brass




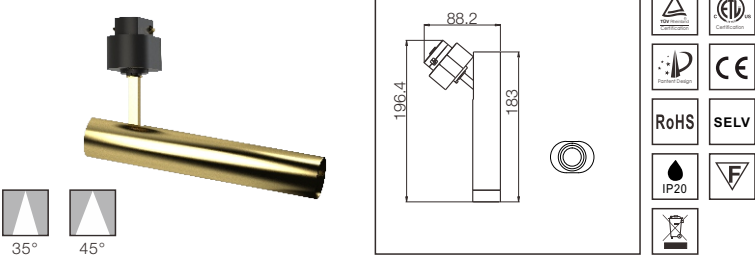


Power	15W
CCT	3000K 4000K
Voltage	DC24V
Output Lumens	1200 lm
CRI	>90
Material	Aluminum
Color	Black / White
Life	30 000 H
Warranty	3 Years


126MSIRCLE 15

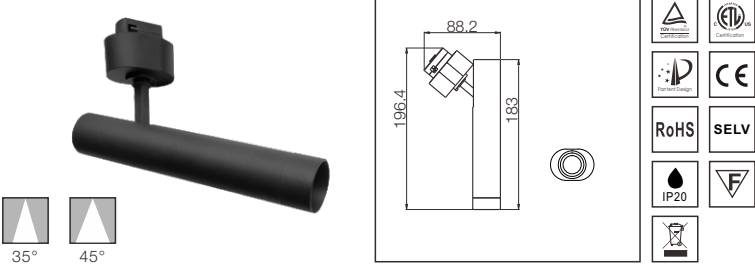


Power	15W
CCT	3000K 4000K
Voltage	DC24V
Output Lumens	1200 lm
CRI	>90
Material	Aluminum
Color	Black
Life	30 000 H
Warranty	3 Years

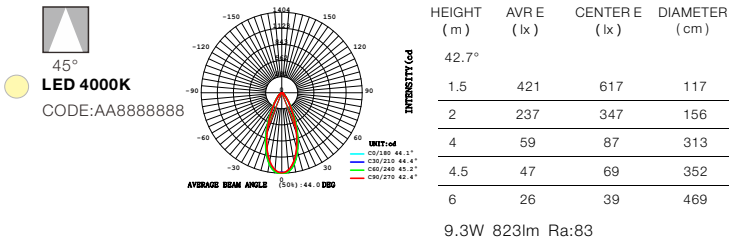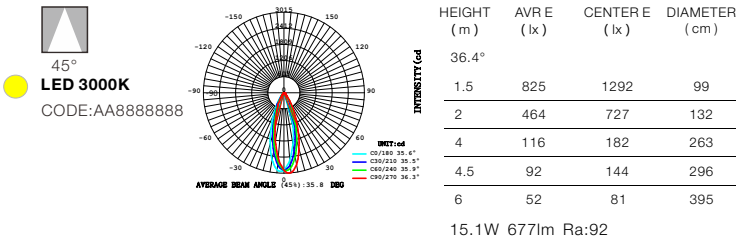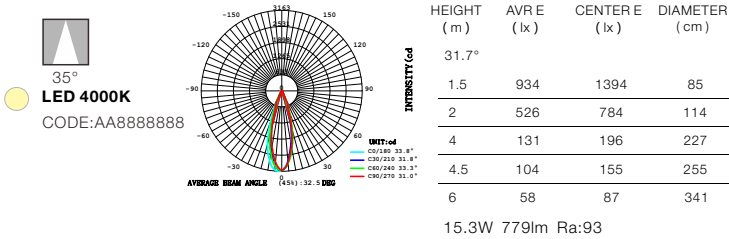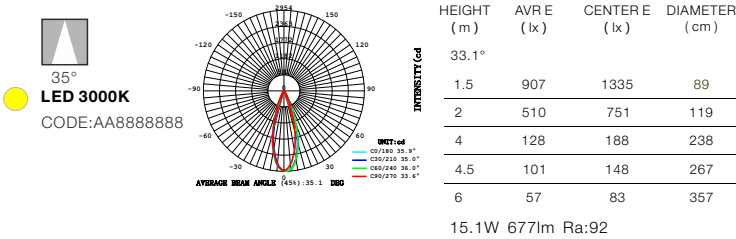

126BAL 5




Power	5W
CCT	3000K 4000K
Voltage	DC24V
Output Lumens	400 lm
CRI	>90
Material	Aluminum+Glass
Color	Black
Life	30 000 H
Warranty	3 Years



Height (m)	AVR E (lx)	CENTER E (lx)	DIAMETER (cm)
1.5	9	36	440
2	5	20	587
4	1.3	5	1174
4.5	1	4	1320
6	0.6	2	1760

4.9W 183lm Ra:82





Height (m)	AVR E (lx)	CENTER E (lx)	DIAMETER (cm)
1.5	4	16	546
2	2	9	728
4	0.6	2.3	1455
4.5	0.5	1.8	1637
6	0.3	1	2183


6W 189lm Ra:82



126BAL CABLE 5

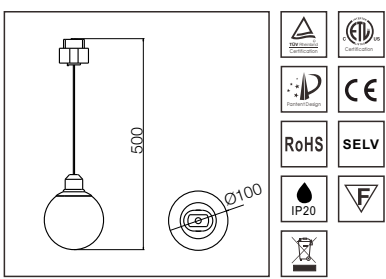


Power	5W
CCT	3000K 4000K
Voltage	DC24V
Output Lumens	400 lm
CRI	>90
Material	Aluminum+Glass
Color	Black
Life	30 000 H
Warranty	3 Years



HEIGHT (m)	AVR E (lx)	CENTER E (lx)	DIAMETER (cm)
1.5	9	36	440
2	5	20	587
4	1.3	5	1174
4.5	1	4	1320
6	0.6	2	1760

4.9W 183lm Ra:82




HEIGHT (m)	AVR E (lx)	CENTER E (lx)	DIAMETER (cm)
1.5	4	16	546
2	2	9	728
4	0.6	2.3	1455
4.5	0.5	1.8	1637
6	0.3	1	2183





6W 189lm Ra:82




126MA 5

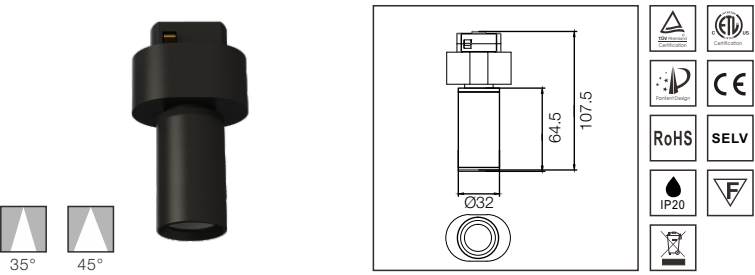

Power	5W
CCT	3000K 4000K
Voltage	DC24V
Output Lumens	400 lm
CRI	>90
Material	Aluminum
Color	Black
Life	30 000 H
Warranty	3 Years

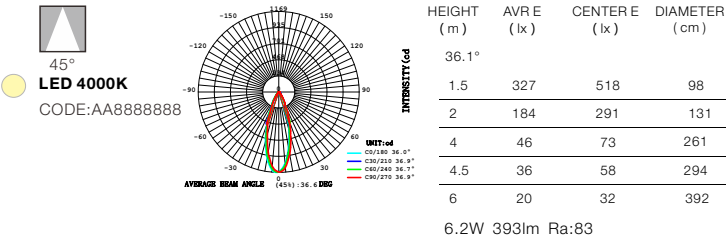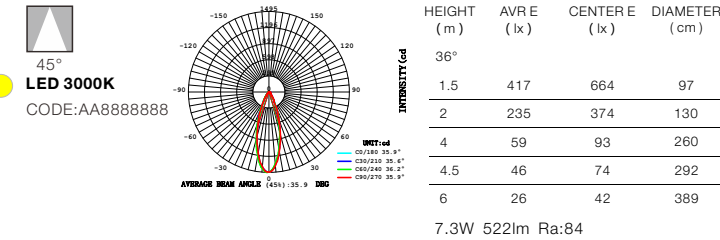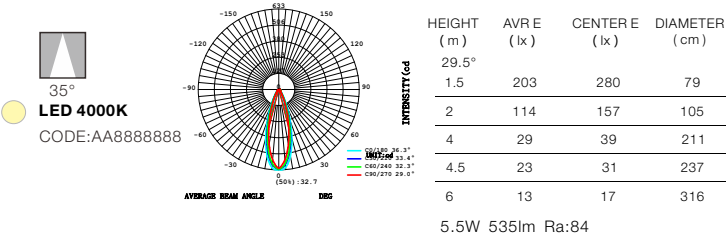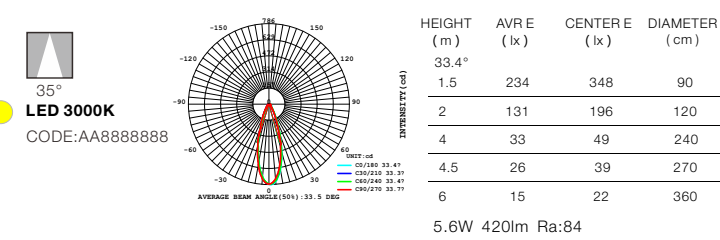


126MF 5

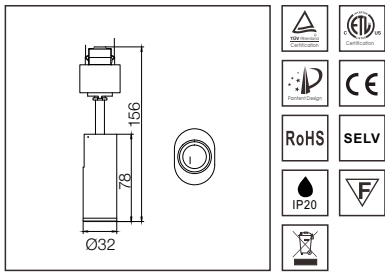

Power	5W
CCT	3000K 4000K
Voltage	DC24V
Output Lumens	400 lm
CRI	>90
Material	Aluminum
Color	Black
Life	30 000 H
Warranty	3 Years


35°
LED 3000K
CODE:AA8888888



HEIGHT (m)	AVR E (lx)	CENTER E (lx)	DIAMETER (cm)
33.4°			
1.5	234	348	90
2	131	196	120
4	33	49	240
4.5	26	39	270
6	15	22	360

5.6W 420lm Ra:84


35°
LED 4000K
CODE:AA8888888



HEIGHT (m)	AVR E (lx)	CENTER E (lx)	DIAMETER (cm)
29.5°			
1.5	203	280	79
2	114	157	105
4	29	39	211
4.5	23	31	237
6	13	17	316

5.5W 535lm Ra:84


45°
LED 3000K
CODE:AA8888888



HEIGHT (m)	AVR E (lx)	CENTER E (lx)	DIAMETER (cm)
36°			
1.5	417	664	97
2	235	374	130
4	59	93	260
4.5	46	74	292
6	26	42	389

7.3W 522lm Ra:84

45°
LED 4000K
CODE:AA8888888





HEIGHT (m)	AVR E (lx)	CENTER E (lx)	DIAMETER (cm)
36.1°			
1.5	327	518	98
2	184	291	131
4	46	73	261
4.5	36	58	294
6	20	32	392

6.2W 393lm Ra:83



126MF 10




Power	10W
CCT	3000K 4000K
Voltage	DC24V
Output Lumens	800 lm
CRI	>90
Material	Aluminum
Color	Black
Life	30 000 H
Warranty	3 Years

126MF 10 300/700



LED 3000K
CODE:AA8888888




HEIGHT (m)	AVR E (lx)	CENTER E (lx)	DIAMETER (cm)
1.5	242	371	122
2	136	209	162
4	34	52	324
4.5	27	41	365
6	15	23	487

9.6W 686lm Ra:83



LED 4000K
CODE:AA8888888




HEIGHT (m)	AVR E (lx)	CENTER E (lx)	DIAMETER (cm)
1.5	274	377	88
2	154	212	118
4	39	53	236
4.5	30	42	265
6	17	24	353

9.3W 823lm Ra:83



LED 3000K
CODE:AA8888888




HEIGHT (m)	AVR E (lx)	CENTER E (lx)	DIAMETER (cm)
1.5	680	1073	100
2	382	604	133
4	96	151	266
4.5	76	119	299
6	42	67	399

12.8W 891lm Ra:93



LED 4000K
CODE:AA8888888





HEIGHT (m)	AVR E (lx)	CENTER E (lx)	DIAMETER (cm)
1.5	478	765	96
2	269	430	127
4	67	107	255
4.5	53	85	287
6	30	48	382

11.3W 554lm Ra:93




126MF 15

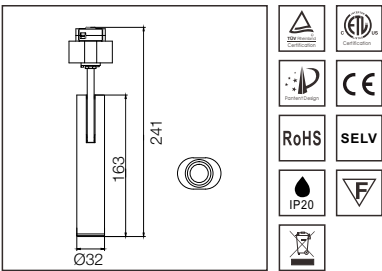

Power	15W
CCT	3000K 4000K
Voltage	DC24V
Output Lumens	1200 lm
CRI	>90
Material	Aluminum
Color	Black
Life	30 000 H
Warranty	3 Years


35°
LED 3000K
CODE:AA8888888



HEIGHT (m)	AVR E (lx)	CENTER E (lx)	DIAMETER (cm)
1.5	757	1173	96
2	426	660	127
4	106	165	255
4.5	84	130	287
6	47	73	382

15.4W 821lm Ra:91


35°
LED 4000K
CODE:AA8888888



HEIGHT (m)	AVR E (lx)	CENTER E (lx)	DIAMETER (cm)
1.5	595	875	114
2	335	492	152
4	84	123	305
4.5	66	97	343
6	37	54	457

14.6W 1970lm Ra:84


45°
LED 3000K
CODE:AA8888888



HEIGHT (m)	AVR E (lx)	CENTER E (lx)	DIAMETER (cm)
1.5	825	1292	99
2	464	727	132
4	116	182	263
4.5	92	144	296
6	52	81	395

15.3W 962lm Ra:93



45°
LED 4000K
CODE:AA8888888



HEIGHT (m)	AVR E (lx)	CENTER E (lx)	DIAMETER (cm)
1.5	421	617	117
2	237	347	156
4	59	87	313
4.5	47	69	352
6	26	39	469


15.3W 1018lm Ra:93

126MC 10



Power	10W
CCT	3000K 4000K
Voltage	DC24V
Output Lumens	800 lm
CRI	>90
Material	Aluminum
Color	Black
Life	30 000 H
Warranty	3 Years


35°
LED 3000K
CODE:AA8888888



HEIGHT (m)	AVR E (lx)	CENTER E (lx)	DIAMETER (cm)
1.5	242	371	122
2	136	209	162
4	34	52	324
4.5	27	41	365
6	15	23	487

9.6W 686lm Ra:83


35°
LED 4000K
CODE:AA8888888



HEIGHT (m)	AVR E (lx)	CENTER E (lx)	DIAMETER (cm)
1.5	274	377	88
2	154	212	118
4	39	53	236
4.5	30	42	265
6	17	24	353

9.3W 823lm Ra:83


45°
LED 3000K
CODE:AA8888888



HEIGHT (m)	AVR E (lx)	CENTER E (lx)	DIAMETER (cm)
1.5	680	1073	100
2	382	604	133
4	96	151	266
4.5	76	119	299
6	42	67	399

12.8W 891lm Ra:93



45°
LED 4000K
CODE:AA8888888



HEIGHT (m)	AVR E (lx)	CENTER E (lx)	DIAMETER (cm)
1.5	478	765	96
2	269	430	127
4	67	107	255
4.5	53	85	287
6	30	48	382


11.3W 554lm Ra:93

126MD 10



Power	10W
CCT	3000K 4000K
Voltage	DC24V
Output Lumens	800 lm
CRI	>90
Material	Aluminum
Color	Black
Life	30 000 H
Warranty	3 Years


35°
LED 3000K
CODE:AA8888888



HEIGHT (m)	AVR E (lx)	CENTER E (lx)	DIAMETER (cm)
1.5	242	371	122
2	136	209	162
4	34	52	324
4.5	27	41	365
6	15	23	487

9.6W 686lm Ra:83


35°
LED 4000K
CODE:AA8888888



HEIGHT (m)	AVR E (lx)	CENTER E (lx)	DIAMETER (cm)
1.5	274	377	88
2	154	212	118
4	39	53	236
4.5	30	42	265
6	17	24	353

9.3W 823lm Ra:83


45°
LED 3000K
CODE:AA8888888



HEIGHT (m)	AVR E (lx)	CENTER E (lx)	DIAMETER (cm)
1.5	680	1073	100
2	382	604	133
4	96	151	266
4.5	76	119	299
6	42	67	399

12.8W 891lm Ra:93



45°
LED 4000K
CODE:AA8888888



HEIGHT (m)	AVR E (lx)	CENTER E (lx)	DIAMETER (cm)
1.5	478	765	96
2	269	430	127
4	67	107	255
4.5	53	85	287
6	30	48	382


11.3W 554lm Ra:93

126SDA 10



Power	10W
CCT	3000K 4000K
Voltage	DC24V
Output Lumens	800 lm
CRI	>90
Material	Aluminum
Color	Black
Life	30 000 H
Warranty	3 Years


35°
LED 3000K
CODE:AA8888888



HEIGHT (m)	AVR E (lx)	CENTER E (lx)	DIAMETER (cm)
44.1°			
1.5	242	371	122
2	136	209	162
4	34	52	324
4.5	27	41	365
6	15	23	487

9.6W 686lm Ra:83


35°
LED 4000K
CODE:AA8888888



HEIGHT (m)	AVR E (lx)	CENTER E (lx)	DIAMETER (cm)
32.8°			
1.5	274	377	88
2	154	212	118
4	39	53	236
4.5	30	42	265
6	17	24	353

9.3W 823lm Ra:83


45°
LED 3000K
CODE:AA8888888



HEIGHT (m)	AVR E (lx)	CENTER E (lx)	DIAMETER (cm)
34.5°			
1.5	710	1091	93
2	400	614	124
4	100	153	248
4.5	79	121	279
6	44	68	372

6.6W 230lm Ra:91


45°
LED 4000K
CODE:AA8888888



HEIGHT (m)	AVR E (lx)	CENTER E (lx)	DIAMETER (cm)
35.3°			
1.5	506	774	90
2	285	746	120
4	71	109	240
4.5	56	86	269
6	32	48	359

11.5W 378lm Ra:92


126ME 15



Power	15W
CCT	3000K 4000K
Voltage	DC24V
Output Lumens	1200 lm
CRI	>90
Material	Aluminum
Color	Black
Life	30 000 H
Warranty	3 Years



120°
LED 3000K
CODE:AA8888888




HEIGHT (m)	AVR E (lx)	CENTER E (lx)	DIAMETER (cm)
1.5	7	71	963
2	4	40	1284
4	1	10	2568
4.5	0.8	8	2890
6	0.5	4	3853

16.3W 616lm Ra:92




120°
LED 4000K
CODE:AA8888888




HEIGHT (m)	AVR E (lx)	CENTER E (lx)	DIAMETER (cm)
1.5	14	83	709
2	8	47	945
4	1.9	12	1890
4.5	1.5	9	2126
6	0.9	5	2835

16.3W 622lm Ra:93

126ME cone

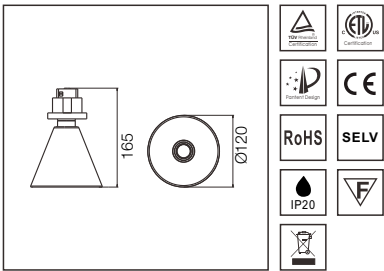


Power	5W
CCT	3000K 4000K
Voltage	DC24V
Output Lumens	400 lm
CRI	>90
Material	Aluminum
Color	Copper
Life	30 000 H
Warranty	3 Years



HEIGHT (m)	AVR E (lx)	CENTER E (lx)	DIAMETER (cm)
1.5	21	41	70
2	12	23	93
4	3	6	186
4.5	2	5	209
6	1	3	278

5.1W 128lm Ra:91




HEIGHT (m)	AVR E (lx)	CENTER E (lx)	DIAMETER (cm)
1.5	25	42	73
2	14	24	97
4	4	6	194
4.5	3	5	219
6	2	3	292


5.1W 129lm Ra:92



126ME cone cable




Power	5W
CCT	3000K 4000K
Voltage	DC24V
Output Lumens	400 lm
CRI	>90
Material	Aluminum
Color	Copper
Life	30 000 H
Warranty	3 Years



HEIGHT (m)	AVR E (lx)	CENTER E (lx)	DIAMETER (cm)
1.5	21	41	70
2	12	23	93
4	3	6	186
4.5	2	5	209
6	1	3	278

5.1W 128lm Ra:91





HEIGHT (m)	AVR E (lx)	CENTER E (lx)	DIAMETER (cm)
1.5	25	42	73
2	14	24	97
4	4	6	194
4.5	3	5	219
6	2	3	292

5.1W 129lm Ra:92


Product information

126ME.cover

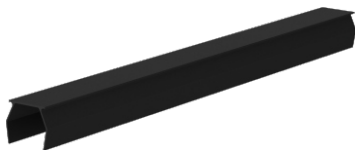


Material PVC
Color Black

Wireless switch panel




Material Plastic
Color White

SMART DIM



Power Max. 100W
Material Plastic
Color White


126 ME Connector Kit



Material Aluminum
Color Black


Product information

126MEN




Material Aluminum
Color Black

126MECN





Material Aluminum
Color Black

Cap 126ME



Material Aluminum
Color Black


126ME Feeder CABLE



Material Aluminum
Color Black


Product information

126MN corner H




Material Aluminum
Color Black

126MN corner V





Material Aluminum
Color Black

126MCN corner H



Material Aluminum
Color Black



126MCN corner V



Material Aluminum
Color Black



Product information

126MLN




Material Aluminum
Color Black

126MN Corner V 60°

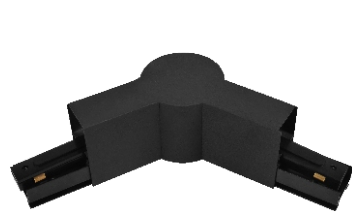



Material Aluminum
Color Black

126MN Corner 3V 60°



Material Aluminum
Color Black


126ME feeder



Material Aluminum
Color Black


Product information

126ME Feeder Power




Power	Max. 180W
Material	Aluminum
Color	Black

S-mounted




Material	Iron
Color	Chrome

Cable 70



Material	Aluminum
Color	Black

Pipe kit



Material	Aluminum
Color	Black