


LED LINEAR LIGHT
2017 Version

PRODUCT CODE


BX	- XXX	X	- XXXX	- XXW	- XX	XX	XX
Brand	Serie number	Diffuser	Length	Power	Mounting	CCT	Colour
Beatilux	801	A : Opal diffuser	1200	36	SM : Suspension mounting	30 : 3000K	WH : White
	802	B : Convex diffuser	1800	54	CM : Ceiling mounting	40 : 4000K	BK : Black
	803	C : Convex diffuser	2400	72	RM : Recessed mounting	50 : 5000K	GR : Grey or Silver
	804	D : Prismatic diffuser	or customized		WM : Wall mounting		
	805						
	More						


CONTENTS

LED Suspended/Ceiling/Recessed Trimless/Wall Mounted Series

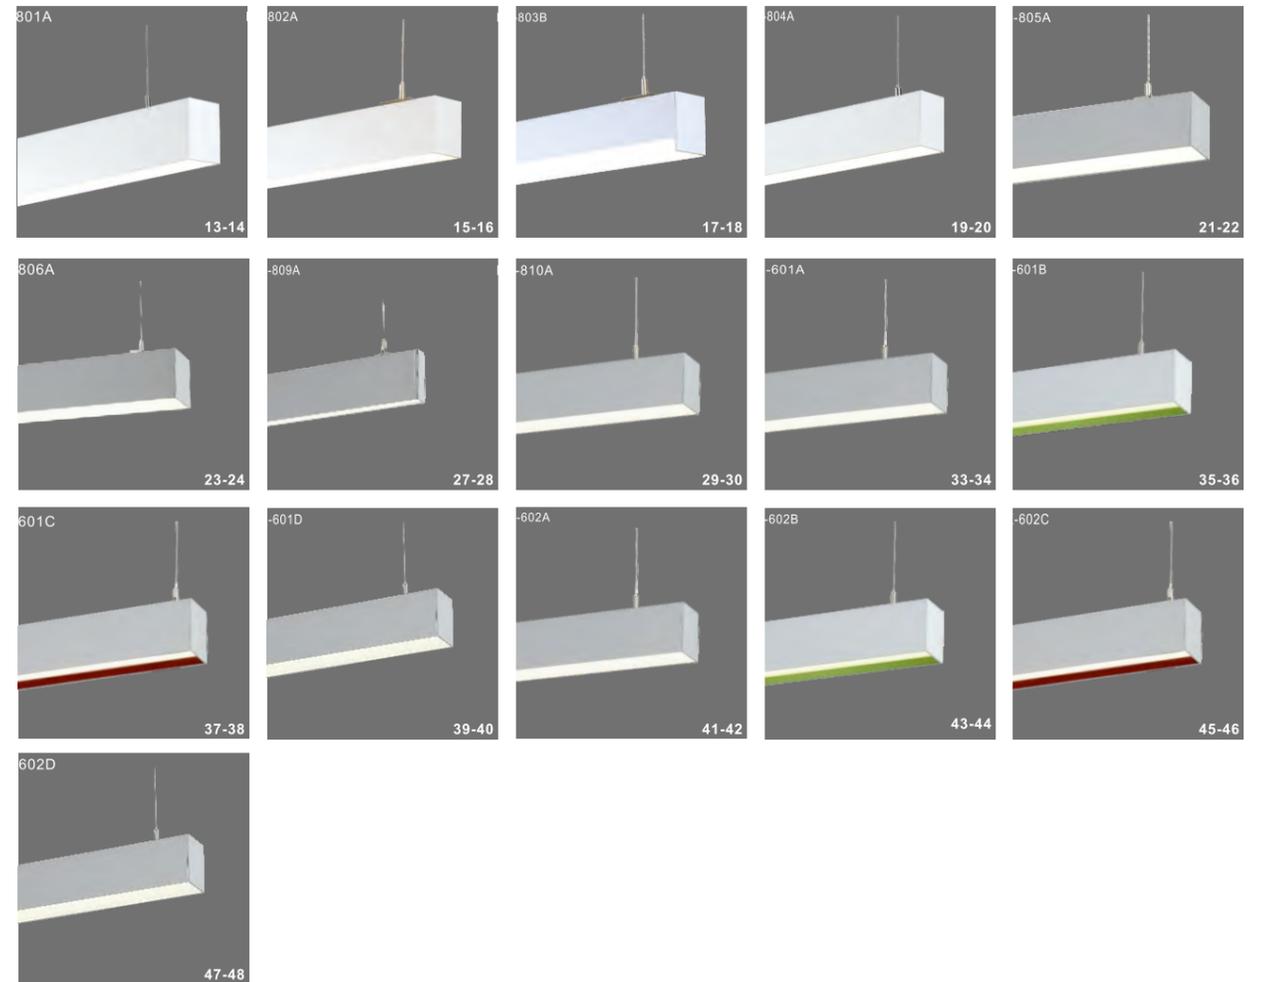


LED Recessed Trim Series



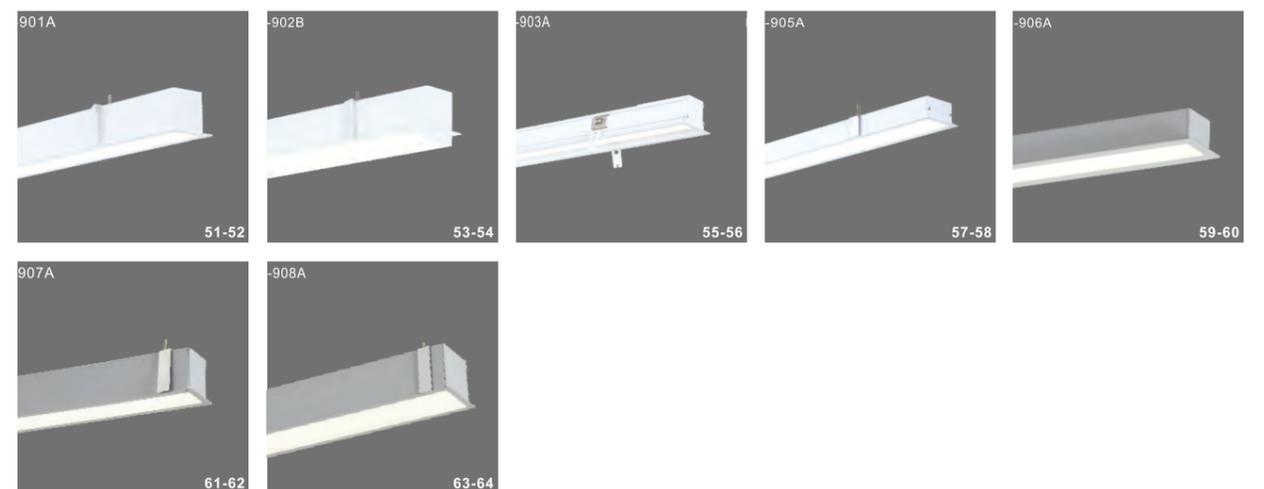


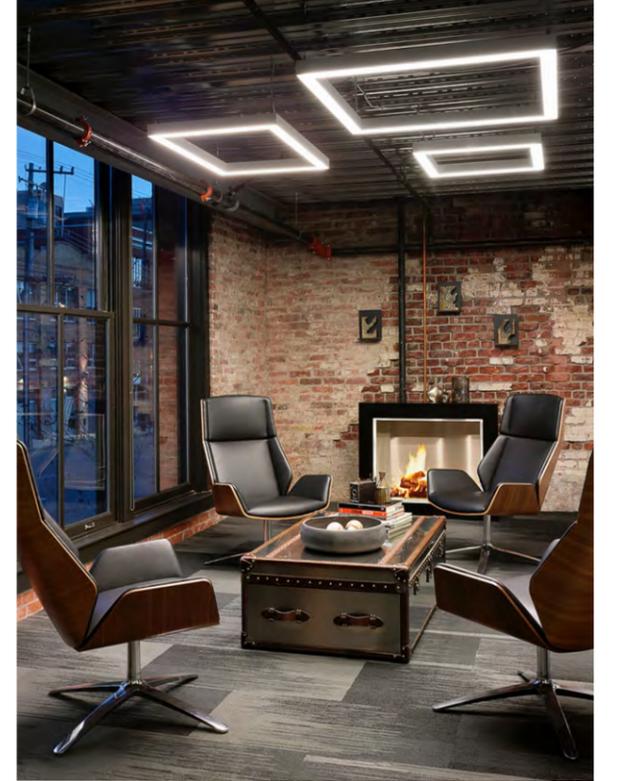

PROJECT

CASE

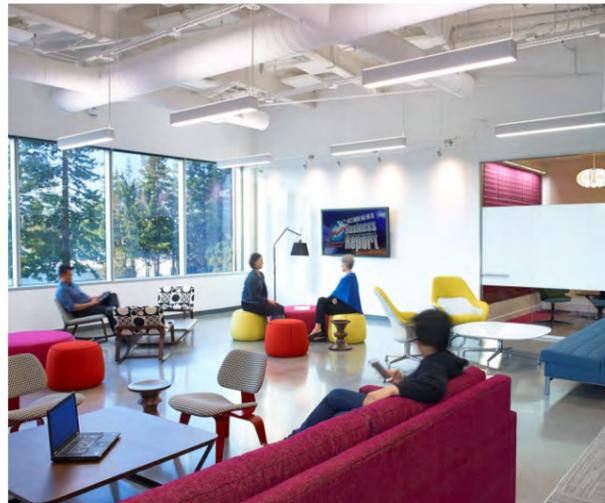


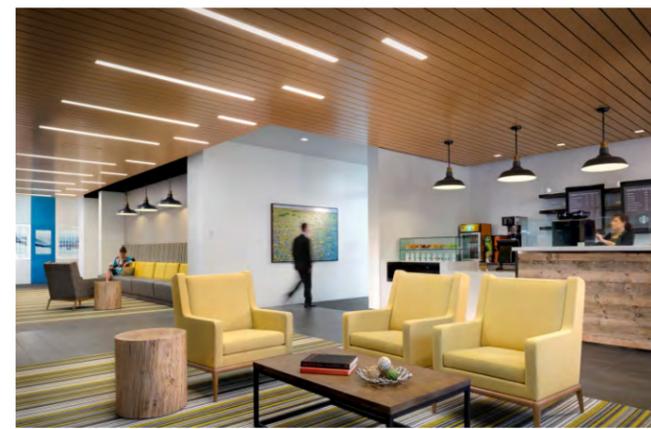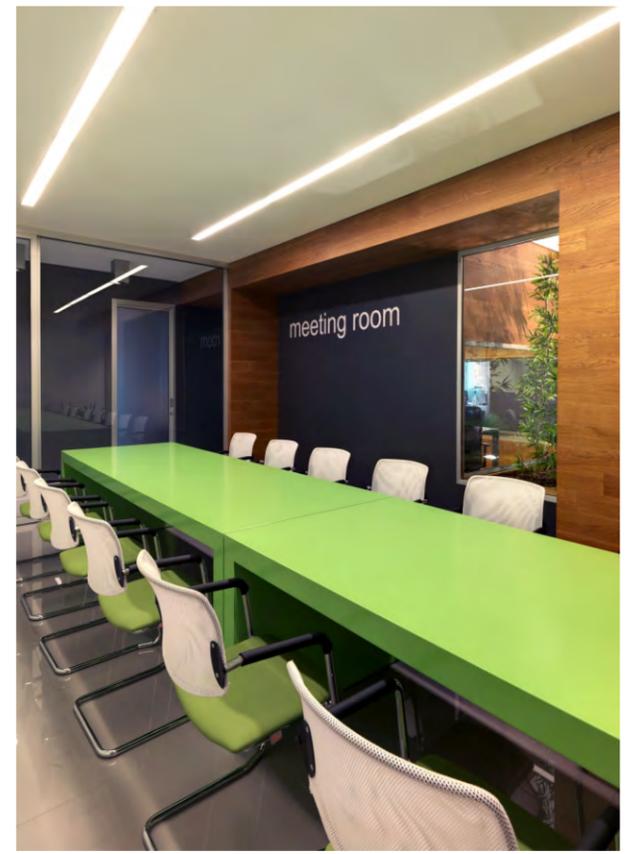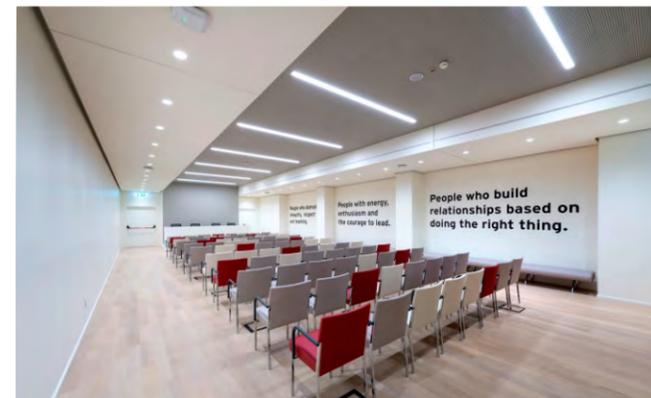



LED Suspended/Ceiling/Recessed Trimless/
Wall mounted Series

801A Suspended/Ceiling/Recessed/Trimless/Wall Mounted Luminaires

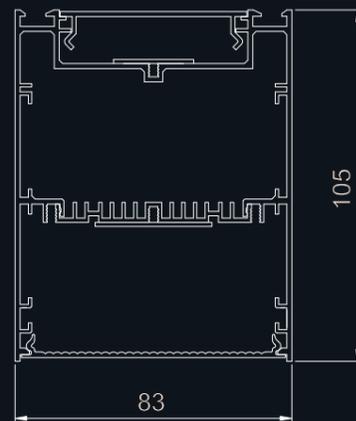


Description

- High transmittance PMMA diffuser creating a high visual comfort and very uniform lighting distributions
- Equipped with aluminum PCB for LED source, and high efficiency SMD LED light source up to 120lm/W
- Patented end-cap design to protect light leak and no screw to be appeared
- Customized lighting system with the latest addition of system connection module accessories (180° extender/L-shape/T-shape/X-shape)
- Non-dimmable as standard or DALI available on request
- 3hrs Emergency available on request
- Life-time of 50,000 hrs, low luminous decay, low maintain cost
- 3 years warranty included
- Application: Offices, Educational Institutes, Hospitals, Warehouses, Retails Etc

Item number	Distribution	Dimension	Power	Flux(lm)	CCT
801A-600-18W	Direct	570*83*105mm	18W	1620lm	3000K/4000K/5000K
801A-1200-36W	Direct	1130*83*105mm	36W	3240lm	3000K/4000K/5000K
801A-1800-54W	Direct	1690*83*105mm	54W	4860lm	3000K/4000K/5000K
801A-2400-72W	Direct	2250*83*105mm	72W	6480lm	3000K/4000K/5000K
801A-600-27W	Direct & Indirect	570*83*105mm	27W	2430lm	3000K/4000K/5000K
801A-1200-54W	Direct & Indirect	1130*83*105mm	54W	4860lm	3000K/4000K/5000K
801A-1800-81W	Direct & Indirect	1690*83*105mm	81W	7290lm	3000K/4000K/5000K
801A-2400-108W	Direct & Indirect	2250*83*105mm	108W	9720lm	3000K/4000K/5000K

*For other runs, please specify.


Mounting

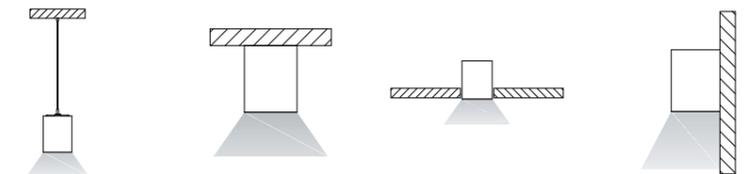

Optional Connector

180° extender	L-shape conner	T-shape conner	X-shape conner
801A-I	801A-L-18W	801A-T-25W	801A-X-36W
N/A	18W	25W	36W
80*29*2mm	300*300*83*105mm	560*330*83*105mm	560*595*83*105mm

802A Suspended/Ceiling/Recessed Trimless/Wall Mounted Luminaires

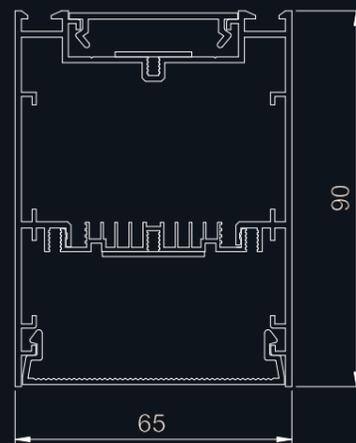


Description

- High transmittance PMMA diffuser creating a high visual comfort and very uniform lighting distributions
- Equipped with aluminum PCB for LED source, and high efficiency SMD LED light source up to 120lm/W
- Patented end-cap design to protect light leak and no screw to be appeared
- Customized lighting system with the latest addition of system connection module accessories (180° extender/L-shape/T-shape/X-shape)
- Non-dimmable as standard or DALI available on request
- 3hrs Emergency available on request
- Life-time of 50,000 hrs, low luminous decay, low maintain cost
- 3 years warranty included
- Application: Offices, Educational Institutes, Hospitals, Warehouses, Retails Etc

Item number	Distribution	Dimension	Power	Flux(lm)	CCT
802A-600-18W	Direct	570*65*90mm	18W	1620lm	3000K/4000K/5000K
802A-1200-36W	Direct	1130*65*90mm	36W	3240lm	3000K/4000K/5000K
802A-1800-54W	Direct	1690*65*90mm	54W	4860lm	3000K/4000K/5000K
802A-2400-72W	Direct	2250*65*90mm	72W	6480lm	3000K/4000K/5000K
802A-600-27W	Direct & Indirect	570*65*90mm	27W	2430lm	3000K/4000K/5000K
802A-1200-54W	Direct & Indirect	1130*65*90mm	54W	4860lm	3000K/4000K/5000K
802A-1800-81W	Direct & Indirect	1690*65*90mm	81W	7290lm	3000K/4000K/5000K
802A-2400-108W	Direct & Indirect	2250*65*90mm	108W	9720lm	3000K/4000K/5000K

*For other runs, please specify.


Mounting

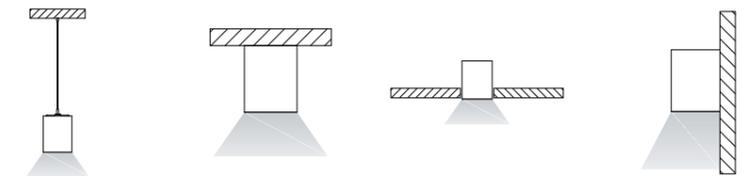

Optional Connector

180° extender	L-shape conner	T-shape conner	X-shape conner
802A-I	802A-L-18W	802A-T-25W	802A-X-36W
N/A	18W	25W	36W
80*22*2mm	300*300*65*90mm	560*330*65*90mm	560*595*65*90mm

803B Suspended/Ceiling/Recessed Trimless/Wall Mounted Luminaires

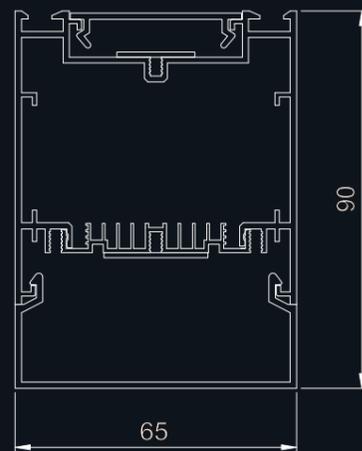


Description

- High transmittance PMMA diffuser creating a high visual comfort and very uniform lighting distributions
- Equipped with aluminum PCB for LED source, and high efficiency SMD LED light source up to 120lm/W
- Patented end-cap design to protect light leak and no screw to be appeared
- Customized lighting system with the latest addition of system connection module accessories (180° extender/L-shape/T-shape/X-shape)
- Non-dimmable as standard or DALI available on request
- 3hrs Emergency available on request
- Life-time of 50,000 hrs, low luminous decay, low maintain cost
- 3 years warranty included
- Application: Offices, Educational Institutes, Hospitals, Warehouses, Retails Etc

Item number	Distribution	Dimension	Power	Flux(lm)	CCT
803B-600-18W	Direct	570*65*90mm	18W	1620lm	3000K/4000K/5000K
803B-1200-36W	Direct	1130*65*90mm	36W	3240lm	3000K/4000K/5000K
803B-1800-54W	Direct	1690*65*90mm	54W	4860lm	3000K/4000K/5000K
803B-2400-72W	Direct	2250*65*90mm	72W	6480lm	3000K/4000K/5000K
803B-600-27W	Direct & Indirect	570*65*90mm	27W	2430lm	3000K/4000K/5000K
803B-1200-54W	Direct & Indirect	1130*65*90mm	54W	4860lm	3000K/4000K/5000K
803B-1800-81W	Direct & Indirect	1690*65*90mm	81W	7290lm	3000K/4000K/5000K
803B-2400-108W	Direct & Indirect	2250*65*90mm	108W	9720lm	3000K/4000K/5000K

*For other runs, please specify.


Mounting

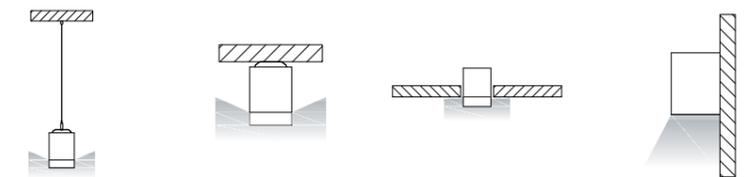

Optional Connector

180° extender	L-shape conner	T-shape conner	X-shape conner
803B-I	803B-L-18W	803B-T-25W	803B-X-36W
N/A	18W	25W	36W
80*29*2mm/ 80*9*2.5mm	305*305*65*90mm	562*340*65*90mm	562*597*65*90mm

804A Suspended/Wall Mounted Luminaire

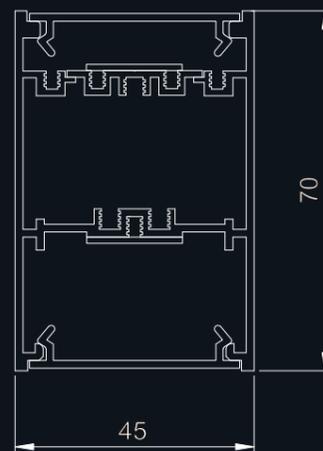

Description

- High transmittance PMMA diffuser creating a high visual comfort and very uniform lighting distributions
- Equipped with aluminum PCB for LED source, and high efficiency SMD LED light source up to 120lm/W
- Patented end-cap design to protect light leak and no screw to be appeared
- Customized lighting system with the latest addition of system connection module accessories (180° extender/L-shape/T-shape/X-shape)
- Non-dimmable as standard or DALI available on request
- 3hrs Emergency available on request
- Life-time of 50,000 hrs, low luminous decay, low maintain cost
- 3 years warranty included
- Application: Offices, Educational Institutes, Hospitals, Warehouses, Retails Etc

Item number	Distribution	Dimension	Power	Flux(lm)	CCT
804A-600-18W	Direct	570*45*70mm	18W	1620lm	3000K/4000K/5000K
804A-1200-36W	Direct	1130*45*70mm	36W	3240lm	3000K/4000K/5000K
804A-1800-54W	Direct	1690*45*70mm	54W	4860lm	3000K/4000K/5000K
804A-2400-72W	Direct	2250*45*70mm	72W	6480lm	3000K/4000K/5000K
804A-600-27W	Direct & Indirect	570*45*70mm	27W	2430lm	3000K/4000K/5000K
804A-1200-54W	Direct & Indirect	1130*45*70mm	54W	4860lm	3000K/4000K/5000K
804A-1800-81W	Direct & Indirect	1690*45*70mm	81W	7290lm	3000K/4000K/5000K
804A-2400-108W	Direct & Indirect	2250*45*70mm	108W	9720lm	3000K/4000K/5000K

*For other runs, please specify.


Mounting



Optional Connector

180° extender	L-shape conner	T-shape conner	X-shape conner
804A-I	804A-L-18W	804A-T-25W	304A-X-36W
N/A	18W	25W	36W
80*22*2mm/ 80*9*2.5mm	295*295*45*70mm	560*313*45*70mm	560*581*45*70mm

805A Suspended/Ceiling/Recessed Trimless/Wall Mounted Luminaires

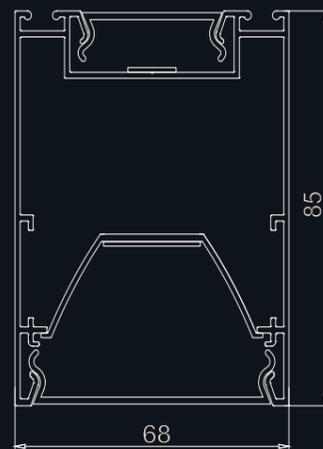


Description

- High transmittance PMMA diffuser creating a high visual comfort and very uniform lighting distributions
- Equipped with aluminum PCB for LED source, and high efficiency SMD LED light source up to 120lm/W
- Patented end-cap design to protect light leak and no screw to be appeared
- Customized lighting system with the latest addition of system connection module accessories (180° extender/L-shape/T-shape/X-shape)
- Non-dimmable as standard or DALI available on request
- 3hrs Emergency available on request
- Life-time of 50,000 hrs, low luminous decay, low maintain cost
- 3 years warranty included
- Application: Offices, Educational Institutes, Hospitals, Warehouses, Retails Etc

Item number	Distribution	Dimension	Power	Flux(lm)	CCT
805A-600-18W	Direct	570*68*85mm	18W	1800lm	3000K/4000K/5000K
805A-1200-36W	Direct	1130*68*85mm	36W	3600lm	3000K/4000K/5000K
805A-1800-54W	Direct	1690*68*85mm	54W	5400lm	3000K/4000K/5000K
805A-2400-72W	Direct	2250*68*85mm	72W	7200lm	3000K/4000K/5000K
805A-600-27W	Direct & Indirect	570*68*85mm	27W	2700lm	3000K/4000K/5000K
805A-1200-54W	Direct & Indirect	1130*68*85mm	54W	5400lm	3000K/4000K/5000K
805A-1800-81W	Direct & Indirect	1690*68*85mm	81W	8100lm	3000K/4000K/5000K
805A-2400-108W	Direct & Indirect	2250*68*85mm	108W	10800lm	3000K/4000K/5000K

*For other runs, please specify.


Mounting

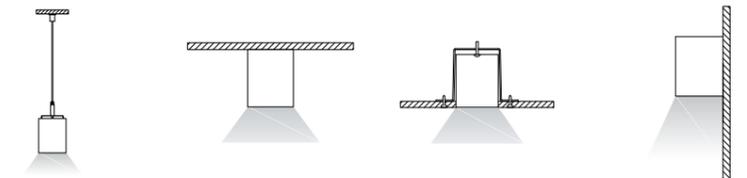

Optional Connector

180° extender	L-shape conner	T-shape conner	X-shape conner
805A-I	805A-L-18W	805A-T-25W	805A-X-36W
N/A	18W	25W	36W
80*40*1.5mm/ 80*21*1.5mm	327*303*68*85mm	282*344*68*85mm	620*282*68*85mm

806A Suspended/Ceiling/Recessed/Trimless/Wall Mounted Luminaires

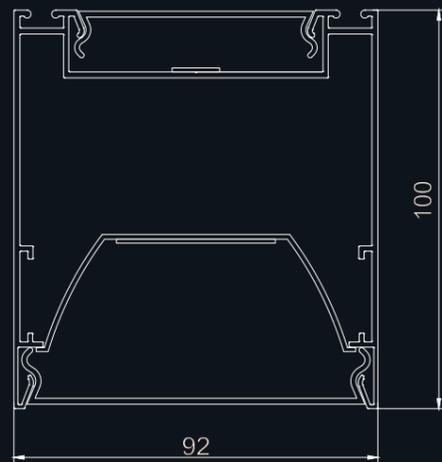


Description

- High transmittance PMMA diffuser creating a high visual comfort and very uniform lighting distributions
- Equipped with aluminum PCB for LED source, and high efficiency SMD LED light source up to 120lm/W
- Patented end-cap design to protect light leak and no screw to be appeared
- Customized lighting system with the latest addition of system connection module accessories (180° extender/L-shape/T-shape/X-shape)
- Non-dimmable as standard or DALI available on request
- 3hrs Emergency available on request
- Life-time of 50,000 hrs, low luminous decay, low maintain cost
- 3 years warranty included
- Application: Offices, Educational Institutes, Hospitals, Warehouses, Retailers Etc

Item number	Distribution	Dimension	Power	Flux(lm)	CCT
806A-600-18W	Direct	570*92*100mm	18W	1800lm	3000K/4000K/5000K
806A-1200-36W	Direct	1130*92*100mm	36W	3600lm	3000K/4000K/5000K
806A-1800-54W	Direct	1690*92*100mm	54W	5400lm	3000K/4000K/5000K
806A-2400-72W	Direct	2250*92*100mm	72W	7200lm	3000K/4000K/5000K
806A-600-27W	Direct & Indirect	570*92*100mm	27W	2700lm	3000K/4000K/5000K
806A-1200-54W	Direct & Indirect	1130*92*100mm	54W	5400lm	3000K/4000K/5000K
806A-1800-81W	Direct & Indirect	1690*92*100mm	81W	8100lm	3000K/4000K/5000K
806A-2400-108W	Direct & Indirect	2250*92*100mm	108W	10800lm	3000K/4000K/5000K

*For other runs, please specify.

Mounting

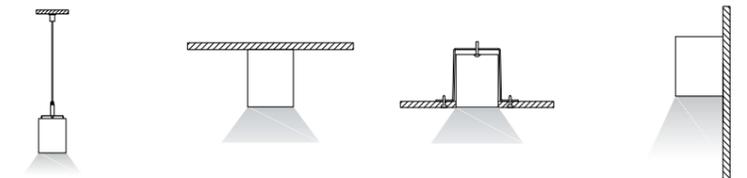


Optional Connector

180° extender	L-shape conner	T-shape conner	X-shape conner
806A-I	806A-L-18W	806A-T-25W	806A-X-36W
N/A	18W	25W	36W
80*40*1.5mm/ 80*21*1.5mm	288*348*92*100mm	282*333*92*100mm	608*282*92*100mm



809A Suspended/Ceiling/Recessed Trimless/Wall Mounted Luminaires

SLIM

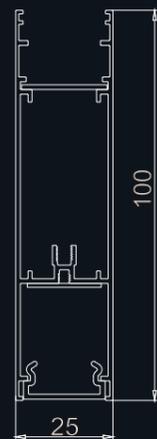


Description

- High transmittance PMMA diffuser creating a high visual comfort and very uniform lighting distributions
- Equipped with aluminum PCB for LED source, and high efficiency SMD LED light source up to 120lm/W
- Patented end-cap design to protect light leak and no screw to be appeared
- Customized lighting system with the latest addition of system connection module accessories (180° extender/L-shape/T-shape/X-shape)
- Non-dimmable as standard or DALI available on request
- 3hrs Emergency available on request
- Life-time of 50,000 hrs, low luminous decay, low maintain cost
- 3 years warranty included
- Application: Offices, Educational Institutes, Hospitals, Warehouses, Retails Etc

Item number	Distribution	Dimension	Power	Flux(lm)	CCT
809A-600-18W	Direct	570*25*100mm	18W	1800lm	3000K/4000K/5000K
809A-1200-36W	Direct	1130*25*100mm	36W	3600lm	3000K/4000K/5000K
809A-1800-54W	Direct	1690*25*100mm	54W	5400lm	3000K/4000K/5000K
809A-2400-72W	Direct	2250*25*100mm	72W	7200lm	3000K/4000K/5000K
809A-600-27W	Direct & Indirect	570*25*100mm	27W	2700lm	3000K/4000K/5000K
809A-1200-54W	Direct & Indirect	1130*25*100mm	54W	5400lm	3000K/4000K/5000K
809A-1800-81W	Direct & Indirect	1690*25*100mm	81W	8100lm	3000K/4000K/5000K
809A-2400-108W	Direct & Indirect	2250*25*100mm	108W	10800lm	3000K/4000K/5000K

*For other runs, please specify.

Mounting

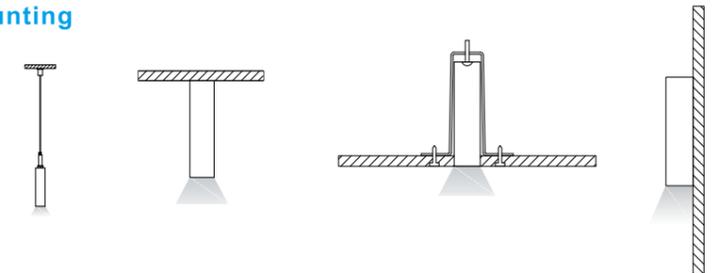


Optional Connector

180° extender	L-shape conner	T-shape conner	X-shape conner
809A-I	809A-L-18W	809A-T-25W	809A-X-36W
N/A	18W	25W	36W
60*46*1.5mm	303*283*25*100mm	282*303*25*100mm	580*282*25*100mm

810A Suspended/Ceiling/Recessed Trimless/Wall Mounted Luminaires

IP44

UGR<19

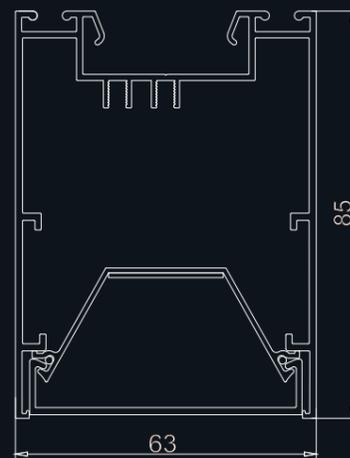


Description

- High transmittance PMMA diffuser creating a high visual comfort and very uniform lighting distributions, UGR<19
- Equipped with aluminum PCB for LED source, and high efficiency SMD LED light source up to 120lm/W
- Patented end-cap design to protect light leak and no screw to be appeared
- Customized lighting system with the latest addition of system connection module accessories (180° extender/L-shape/T-shape/X-shape)
- Non-dimmable as standard or DALI available on request
- 3hrs Emergency available on request
- Life-time of 50,000 hrs, low luminous decay, low maintain cost
- 3 years warranty included
- Application: Offices, Educational Institutes, Hospitals, Warehouses, Retails Etc

Item number	Distribution	Dimension	Power	Flux(lm)	CCT
810A-600-18W	Direct	570*63*85mm	18W	1800lm	3000K/4000K/5000K
810A-1200-36W	Direct	1130*63*85mm	36W	3600lm	3000K/4000K/5000K
810A-1800-54W	Direct	1690*63*85mm	54W	5400lm	3000K/4000K/5000K
810A-2400-72W	Direct	2250*63*85mm	72W	7200lm	3000K/4000K/5000K
810A-600-27W	Direct & Indirect	570*63*85mm	27W	2700lm	3000K/4000K/5000K
810A-1200-54W	Direct & Indirect	1130*63*85mm	54W	5400lm	3000K/4000K/5000K
810A-1800-81W	Direct & Indirect	1690*63*85mm	81W	8100lm	3000K/4000K/5000K
810A-2400-108W	Direct & Indirect	2250*63*85mm	108W	10800lm	3000K/4000K/5000K

*For other runs, please specify.

Mounting

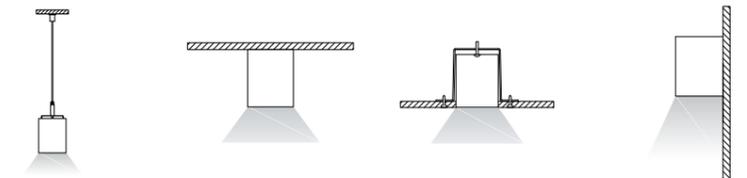


Optional Connector

180° extender	L-shape conner	T-shape conner	X-shape conner
810A-I	810A-L-18W	810A-T-25W	810A-X-36W
N/A	18W	25W	36W
80*40*1.5mm/ 80*21*1.5mm	325*300*63*85mm	282*340*63*85mm	610*282*63*85mm



601A Suspended/Ceiling/Recessed Trimless/Wall Mounted Luminaires

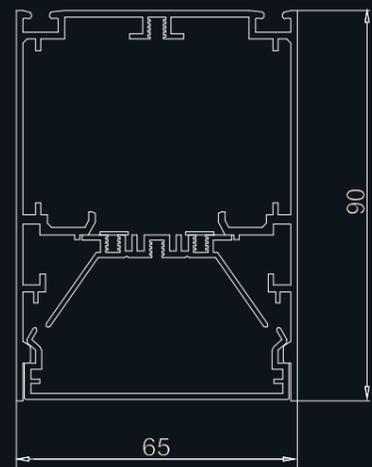


Description

- High transmittance PMMA diffuser creating a high visual comfort and very uniform lighting distributions
- Equipped with aluminum PCB for LED source, and high efficiency SMD LED light source up to 120lm/W
- Patented end-cap design to protect light leak and no screw to be appeared
- Customized lighting system with the latest addition of system connection module accessories (180° extender/L-shape/T-shape/X-shape)
- Non-dimmable as standard or DALI available on request
- 3hrs Emergency available on request
- Life-time of 50,000 hrs, low luminous decay, low maintain cost
- 3 years warranty included
- Application: Offices, Educational Institutes, Hospitals, Warehouses, Retails Etc

Item number	Distribution	Dimension	Power	Flux(lm)	CCT
601A-600-18W	Direct	570*65*90mm	18W	1800lm	3000K/4000K/5000K
601A-1200-36W	Direct	1130*65*90mm	36W	3600lm	3000K/4000K/5000K
601A-1800-54W	Direct	1690*65*90mm	54W	5400lm	3000K/4000K/5000K
601A-2400-72W	Direct	2250*65*90mm	72W	7200lm	3000K/4000K/5000K

*For other runs, please specify.


Mounting

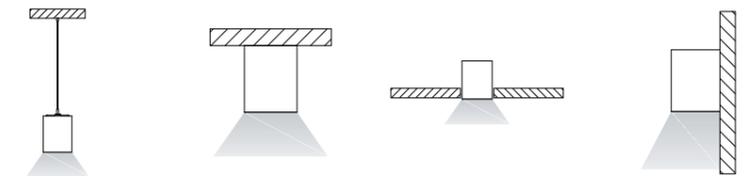

Optional Connector

180° extender	L-shape conner	T-shape conner	X-shape conner
BX-601A-I	BX-601A-L-18W	BX-601A-T-25W	BX-601A-X-36W
N/A	18W	25W	36W
80*22*2mm	300*300*65*90mm	560*330*65*90mm	560*595*65*90mm

601B Suspended/Ceiling/Recessed/Trimless/Wall Mounted Luminaires

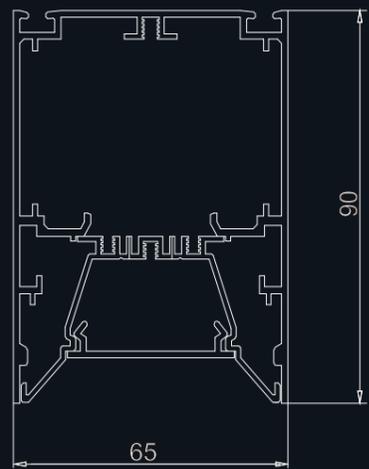


Description

- High transmittance PMMA diffuser creating a high visual comfort and very uniform lighting distributions
- Equipped with aluminum PCB for LED source, and high efficiency SMD LED light source up to 120lm/W
- Patented end-cap design to protect light leak and no screw to be appeared
- Customized lighting system with the latest addition of system connection module accessories (180° extender/L-shape/T-shape/X-shape)
- Non-dimmable as standard or DALI available on request
- 3hrs Emergency available on request
- Life-time of 50,000 hrs, low luminous decay, low maintain cost
- 3 years warranty included
- Application: Offices, Educational Institutes, Hospitals, Warehouses, Retails Etc

Item number	Distribution	Dimension	Power	Flux(lm)	CCT
601B-600-18W	Direct	570*65*90mm	18W	1620lm	3000K/4000K/5000K
601B-1200-36W	Direct	1130*65*90mm	36W	3240lm	3000K/4000K/5000K
601B-1800-54W	Direct	1690*65*90mm	54W	4860lm	3000K/4000K/5000K
601B-2400-72W	Direct	2250*65*90mm	72W	6480lm	3000K/4000K/5000K

*For other runs, please specify.


Mounting

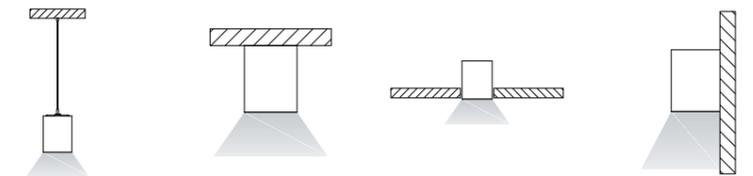

Optional Connector

180° extender	L-shape conner	T-shape conner	X-shape conner
601B-I	601B-L-18W	601B-T-25W	601B-X-36W
N/A	18W	25W	36W
80*22*2mm	300*300*65*90mm	560*330*65*90mm	560*595*65*90mm

601C Suspended/Ceiling/Recessed Trimless/Wall Mounted Luminaires

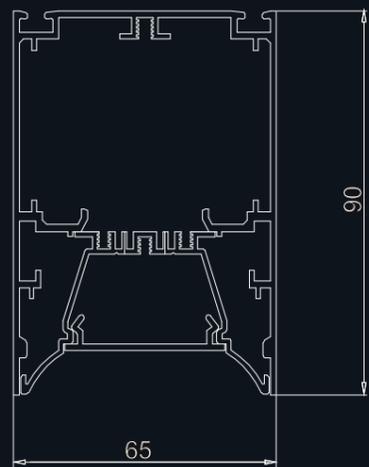


Description

- High transmittance PMMA diffuser creating a high visual comfort and very uniform lighting distributions
- Equipped with aluminum PCB for LED source, and high efficiency SMD LED light source up to 120lm/W
- Patented end-cap design to protect light leak and no screw to be appeared
- Customized lighting system with the latest addition of system connection module accessories (180° extender/L-shape/T-shape/X-shape)
- Non-dimmable as standard or DALI available on request
- 3hrs Emergency available on request
- Life-time of 50,000 hrs, low luminous decay, low maintain cost
- 3 years warranty included
- Application: Offices, Educational Institutes, Hospitals, Warehouses, Retails Etc

Item number	Distribution	Dimension	Power	Flux(lm)	CCT
601C-600-18W	Direct	570*65*90mm	18W	1620lm	3000K/4000K/5000K
601C-1200-36W	Direct	1130*65*90mm	36W	3240lm	3000K/4000K/5000K
601C-1800-54W	Direct	1690*65*90mm	54W	4860lm	3000K/4000K/5000K
601C-2400-72W	Direct	2250*65*90mm	72W	6480lm	3000K/4000K/5000K

*For other runs, please specify.

Mounting

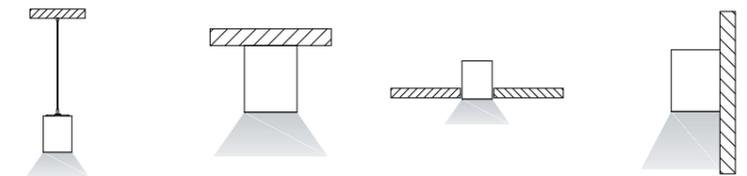


Optional Connector

180° extender	L-shape conner	T-shape conner	X-shape conner
601C-I	601C-L-18W	601C-T-25W	601C-X-36W
N/A	18W	25W	36W
80*22*2mm	300*300*65*90mm	560*330*65*90mm	560*595*65*90mm

601D Suspended/Ceiling/Recessed Trimless/Wall Mounted Luminaires

UGR<19

PRISMATIC

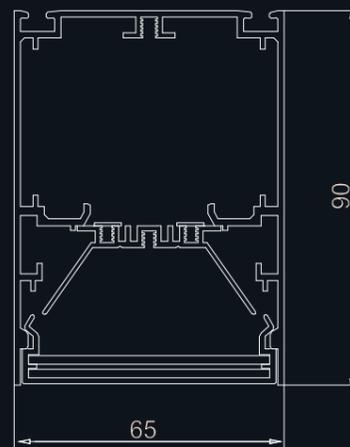


Description

- High transmittance PMMA diffuser creating a high visual comfort and very uniform lighting distributions, UGR<19
- Equipped with aluminum PCB for LED source, and high efficiency SMD LED light source up to 120lm/W
- Patented end-cap design to protect light leak and no screw to be appeared
- Customized lighting system with the latest addition of system connection module accessories (180° extender/L-shape/T-shape/X-shape)
- Non-dimmable as standard or DALI available on request
- 3hrs Emergency available on request
- Life-time of 50,000 hrs, low luminous decay, low maintain cost
- 3 years warranty included
- Application: Offices, Educational Institutes, Hospitals, Warehouses, Retails Etc

Item number	Distribution	Dimension	Power	Flux(lm)	CCT
601D-600-18W	Direct	570*65*90mm	18W	1440lm	3000K/4000K/5000K
601D-1200-36W	Direct	1130*65*90mm	36W	2880lm	3000K/4000K/5000K
601D-1800-54W	Direct	1690*65*90mm	54W	4320lm	3000K/4000K/5000K
601D-2400-72W	Direct	2250*65*90mm	72W	5760lm	3000K/4000K/5000K

*For other runs, please specify.


Mounting

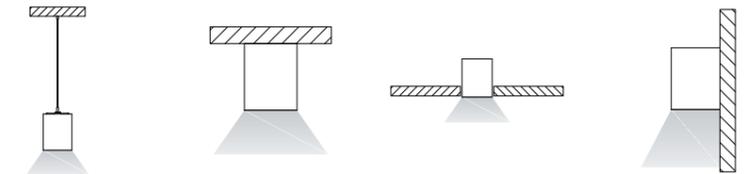

Optional Connector

180° extender	L-shape conner	T-shape conner	X-shape conner
601D-I	601D-L-18W	601D-T-25W	601D-X-36W
N/A	18W	25W	36W
80*22*2mm	300*300*65*90mm	560*330*65*90mm	560*595*65*90mm

602A Suspended/Wall Mounted Luminaire

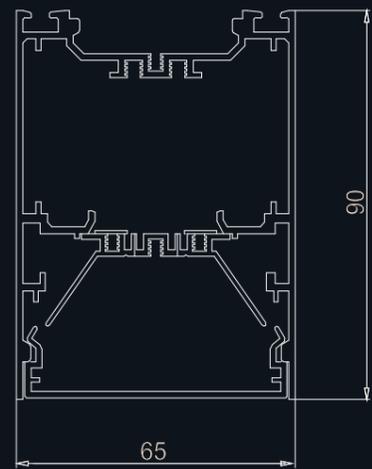

Description

- High transmittance PMMA diffuser creating a high visual comfort and very uniform lighting distributions
- Equipped with aluminum PCB for LED source, and high efficiency SMD LED light source up to 120lm/W
- Patented end-cap design to protect light leak and no screw to be appeared
- Customized lighting system with the latest addition of system connection module accessories (180° extender/L-shape/T-shape/X-shape)
- Non-dimmable as standard or DALI available on request
- 3hrs Emergency available on request
- Life-time of 50,000 hrs, low luminous decay, low maintain cost
- 3 years warranty included
- Application: Offices, Educational Institutes, Hospitals, Warehouses, Retails Etc

Item number	Distribution	Dimension	Power	Flux(lm)	CCT
602A-600-27W	Direct & Indirect	570*65*90mm	27W	2700lm	3000K/4000K/5000K
602A-1200-54W	Direct & Indirect	1130*65*90mm	54W	5400lm	3000K/4000K/5000K
602A-1800-81W	Direct & Indirect	1690*65*90mm	81W	8100lm	3000K/4000K/5000K
602A-2400-108W	Direct & Indirect	2250*65*90mm	108W	10800lm	3000K/4000K/5000K

*For other runs, please specify.


Mounting



Optional Connector

180° extender	L-shape conner	T-shape conner	X-shape conner
602A-I	602A-L-18W	602A-T-25W	602A-X-36W
N/A	18W	25W	36W
80*22*2mm	300*300*65*90mm	560*330*65*90mm	560*595*65*90mm

602B Suspended/Wall Mounted Luminaires

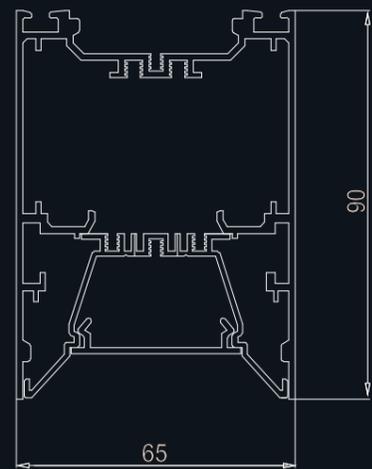

Description

- High transmittance PMMA diffuser creating a high visual comfort and very uniform lighting distributions
- Equipped with aluminum PCB for LED source, and high efficiency SMD LED light source up to 120lm/W
- Patented end-cap design to protect light leak and no screw to be appeared
- Customized lighting system with the latest addition of system connection module accessories (180° extender/L-shape/T-shape/X-shape)
- Non-dimmable as standard or DALI available on request
- 3hrs Emergency available on request
- Life-time of 50,000 hrs, low luminous decay, low maintain cost
- 3 years warranty included
- Application: Offices, Educational Institutes, Hospitals, Warehouses, Retails Etc

Item number	Distribution	Dimension	Power	Flux(lm)	CCT
602B-600-27W	Direct & Indirect	570*65*90mm	27W	2430lm	3000K/4000K/5000K
602B-1200-54W	Direct & Indirect	1130*65*90mm	54W	4860lm	3000K/4000K/5000K
602B-1800-81W	Direct & Indirect	1690*65*90mm	81W	7290lm	3000K/4000K/5000K
602B-2400-108W	Direct & Indirect	2250*65*90mm	108W	9720lm	3000K/4000K/5000K

*For other runs, please specify.


Mounting



Optional Connector

180° extender	L-shape conner	T-shape conner	X-shape conner
602B-I	602B-L-18W	602B-T-25W	602B-X-36W
N/A	18W	25W	36W
80*22*2mm	300*300*65*90mm	560*330*65*90mm	560*595*65*90mm

602C Suspended/Wall Mounted Luminaires

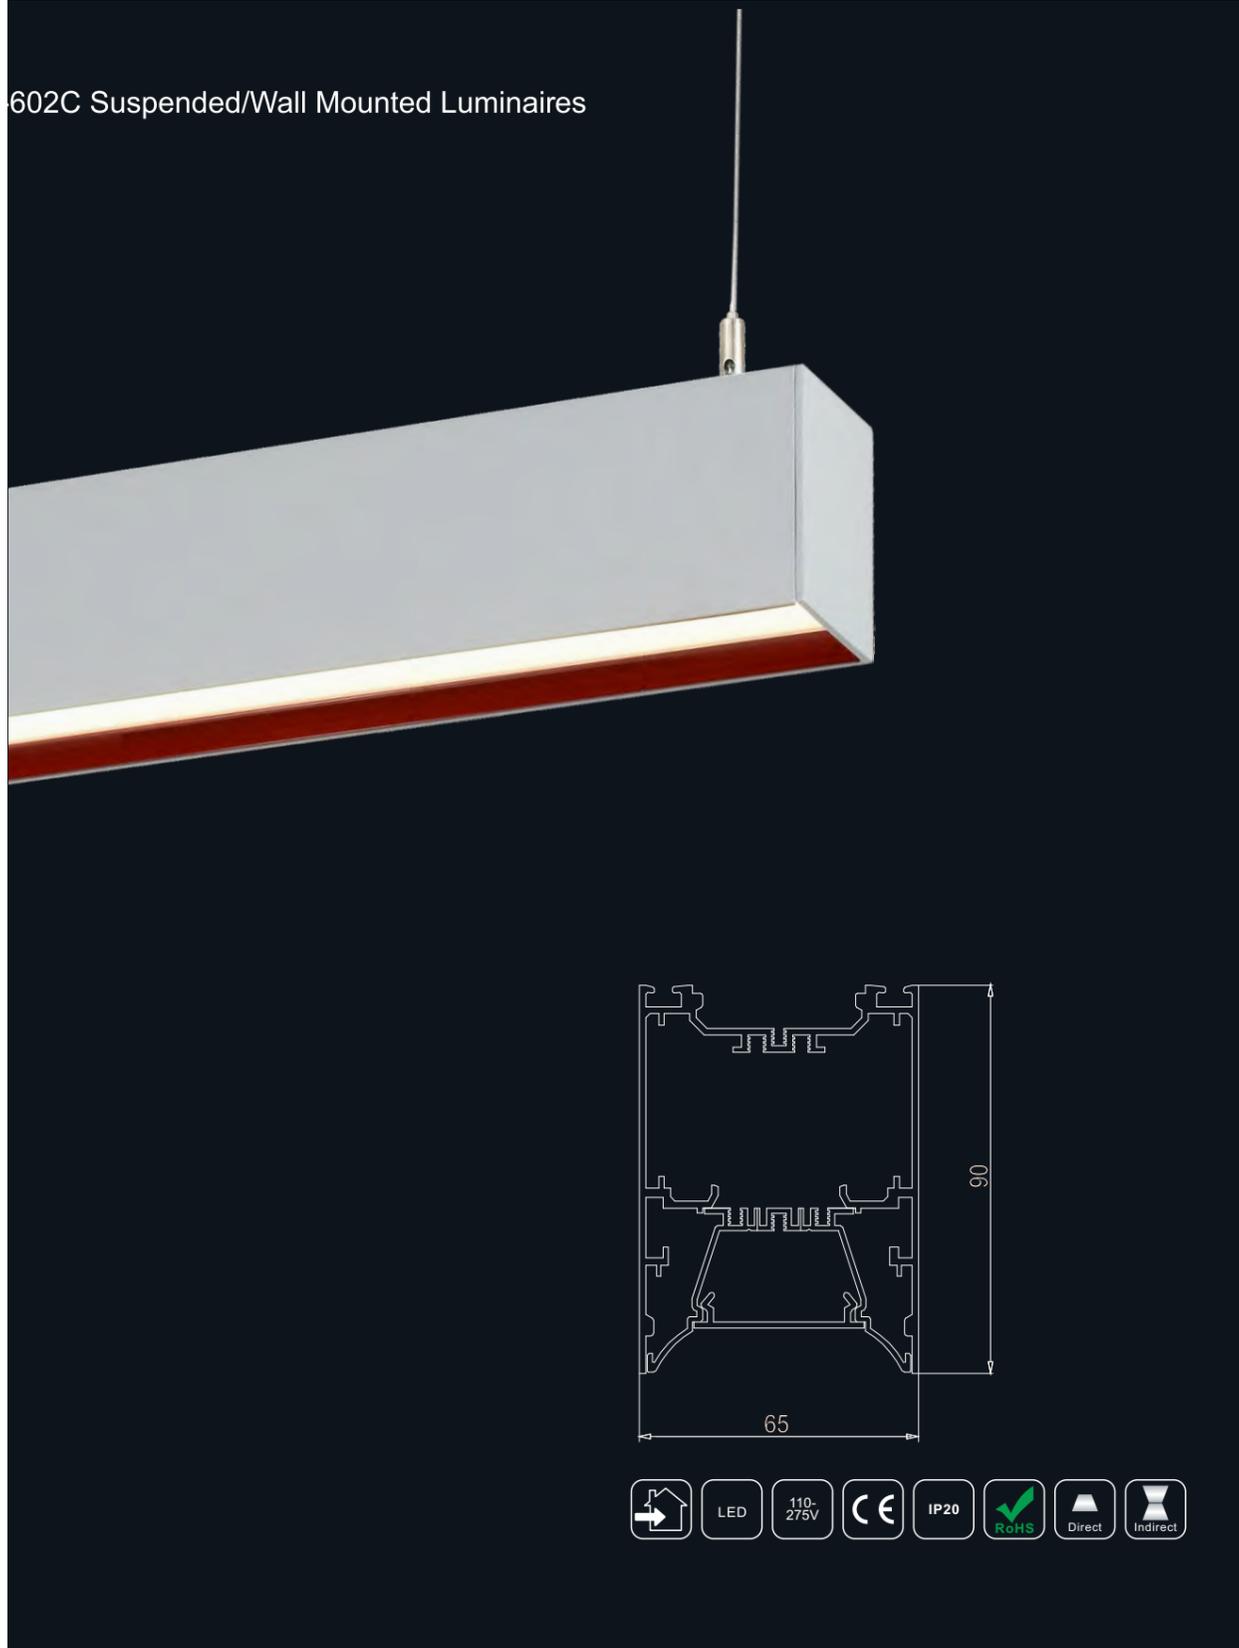

Description

- High transmittance PMMA diffuser creating a high visual comfort and very uniform lighting distributions
- Equipped with aluminum PCB for LED source, and high efficiency SMD LED light source up to 120lm/W
- Patented end-cap design to protect light leak and no screw to be appeared
- Customized lighting system with the latest addition of system connection module accessories (180° extender/L-shape/T-shape/X-shape)
- Non-dimmable as standard or DALI available on request
- 3hrs Emergency available on request
- Life-time of 50,000 hrs, low luminous decay, low maintain cost
- 3 years warranty included
- Application: Offices, Educational Institutes, Hospitals, Warehouses, Retails Etc

Item number	Distribution	Dimension	Power	Flux(lm)	CCT
602C-600-27W	Direct & Indirect	570*65*90mm	27W	2430lm	3000K/4000K/5000K
602C-1200-54W	Direct & Indirect	1130*65*90mm	54W	4860lm	3000K/4000K/5000K
602C-1800-81W	Direct & Indirect	1690*65*90mm	81W	7290lm	3000K/4000K/5000K
602C-2400-108W	Direct & Indirect	2250*65*90mm	108W	9720lm	3000K/4000K/5000K

*For other runs, please specify.



Mounting



Optional Connector

180° extender	L-shape conner	T-shape conner	X-shape conner
602C-I	602C-L-18W	602C-T-25W	602C-X-36W
N/A	18W	25W	36W
80*22*2mm	300*300*65*90mm	560*330*65*90mm	560*595*65*90mm

602D Suspended/Wall Mounted Luminaires

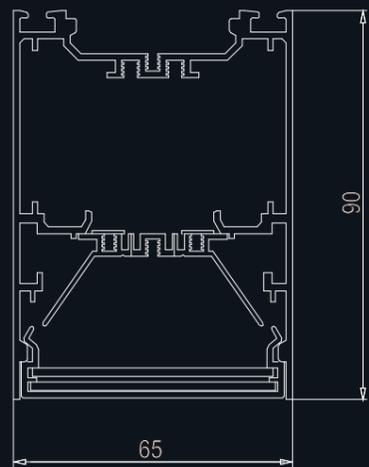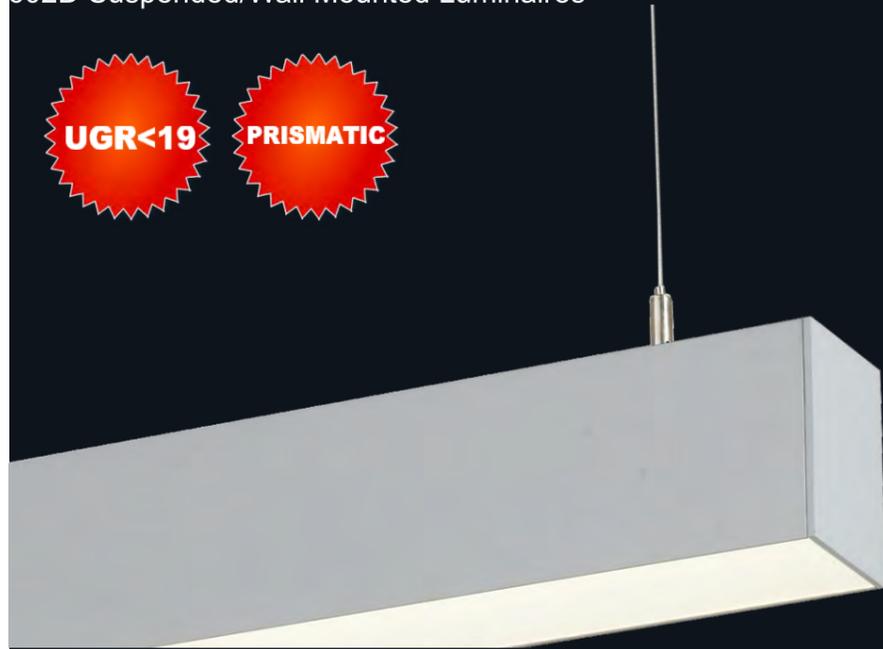

Description

- High transmittance PMMA diffuser creating a high visual comfort and very uniform lighting distributions, UGR<19
- Equipped with aluminum PCB for LED source, and high efficiency SMD LED light source up to 120lm/W
- Patented end-cap design to protect light leak and no screw to be appeared
- Customized lighting system with the latest addition of system connection module accessories (180° extender/L-shape/T-shape/X-shape)
- Non-dimmable as standard or DALI available on request
- 3hrs Emergency available on request
- Life-time of 50,000 hrs, low luminous decay, low maintain cost
- 3 years warranty included
- Application: Offices, Educational Institutes, Hospitals, Warehouses, Retails Etc

Item number	Distribution	Dimension	Power	Flux(lm)	CCT
602D-600-27W	Direct & Indirect	570*65*90mm	27W	2160lm	3000K/4000K/5000K
602D-1200-54W	Direct & Indirect	1130*65*90mm	54W	4320lm	3000K/4000K/5000K
602D-1800-81W	Direct & Indirect	1690*65*90mm	81W	6480lm	3000K/4000K/5000K
602D-2400-108W	Direct & Indirect	2250*65*90mm	108W	8640lm	3000K/4000K/5000K

*For other runs, please specify.

Mounting




Optional Connector

180° extender	L-shape conner	T-shape conner	X-shape conner
602D-I	602D-L-18W	602D-T-25W	602D-X-36W
N/A	18W	25W	36W
80*22*2mm	300*300*65*90mm	560*330*65*90mm	560*595*65*90mm



LED Recessed Trim Series

901A Recessed Trim Luminaires

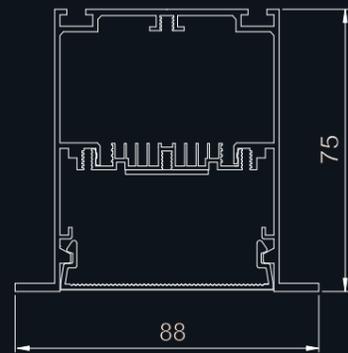


Description

- High transmittance PMMA diffuser creating a high visual comfort and very uniform lighting distributions
- Equipped with aluminum PCB for LED source, and high efficiency SMD LED light source up to 120lm/W
- Patented end-cap design to protect light leak
- Customized lighting system with the latest addition of system connection module accessories (180° extender/L-shape/T-shape/X-shape)
- Non-dimmable as standard or DALI available on request
- 3hrs Emergency available on request
- Life-time of 50,000 hrs, low luminous decay, low maintain cost
- 3 years warranty included
- Application: Offices, Educational Institutes, Hospitals, Warehouses, Retails Etc

Item number	Distribution	Dimension	Power	Flux(lm)	CCT
901A-600-18W	Direct	590*88*75mm	18W	1800lm	3000K/4000K/5000K
901A-1200-36W	Direct	1150*88*75mm	36W	3600lm	3000K/4000K/5000K
901A-1800-54W	Direct	1710*88*75mm	54W	5400lm	3000K/4000K/5000K
901A-2400-72W	Direct	2270*88*75mm	72W	7200lm	3000K/4000K/5000K

*For other runs, please specify.


Mounting



Optional Connector

180° extender	L-shape conner	T-shape conner	X-shape conner
901A-I	901A-L-18W	901A-T-25W	901A-X-36W
N/A	18W	25W	36W
80*22*2mm/ 80*9*2.5mm	311*311*88*75mm	560*337*88*75mm	560*586*88*75mm

902B Recessed Trim Luminaires

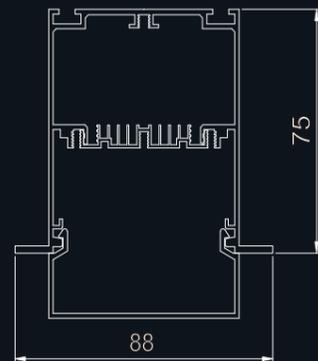


Description

- High transmittance PMMA diffuser creating a high visual comfort and very uniform lighting distributions
- Equipped with aluminum PCB for LED source, and high efficiency SMD LED light source up to 120lm/W
- Patented end-cap design to protect light leak
- Customized lighting system with the latest addition of system connection module accessories (180° extender/L-shape/T-shape/X-shape)
- Non-dimmable as standard or DALI available on request
- 3hrs Emergency available on request
- Life-time of 50,000 hrs, low luminous decay, low maintain cost
- 3 years warranty included
- Application: Offices, Educational Institutes, Hospitals, Warehouses, Retails Etc

Item number	Distribution	Dimension	Power	Flux(lm)	CCT
902B-600-18W	Direct	590*88*75mm	18W	1800lm	3000K/4000K/5000K
902B-1200-36W	Direct	1150*88*75mm	36W	3600lm	3000K/4000K/5000K
902B-1800-54W	Direct	1710*88*75mm	54W	5400lm	3000K/4000K/5000K
902B-2400-72W	Direct	2270*88*75mm	72W	7200lm	3000K/4000K/5000K

*For other runs, please specify.


Mounting



Optional Connector

180° extender	L-shape conner	T-shape conner	X-shape conner
902B-I	902B-L-18W	902B-T-25W	902B-X-36W
N/A	18W	25W	36W
80*29*2mm/ 80*9*2.5mm	311*311*88*75mm	560*337*88*75mm	560*586*88*75mm

903A Recessed Trim Luminaires

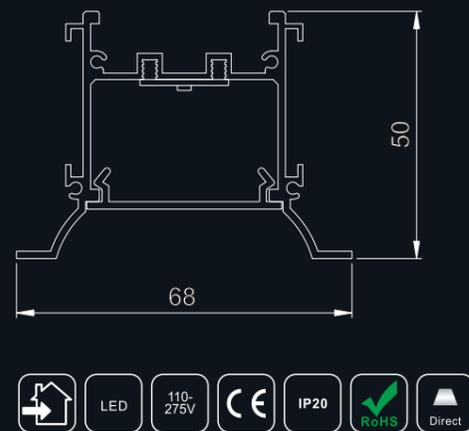


Description

- High transmittance PMMA diffuser creating a high visual comfort and very uniform lighting distributions
- Equipped with aluminum PCB for LED source, and high efficiency SMD LED light source up to 120lm/W
- Patented end-cap design to protect light leak
- Customized lighting system with the latest addition of system connection module accessories (180° extender/L-shape/T-shape/X-shape)
- Non-dimmable as standard or DALI available on request
- 3hrs Emergency available on request
- Life-time of 50,000 hrs, low luminous decay, low maintain cost
- 3 years warranty included
- Application: Offices, Educational Institutes, Hospitals, Warehouses, Retails Etc

Item number	Distribution	Dimension	Power	Flux(lm)	CCT
903A-600-18W	Direct	580*68*50mm	18W	1800lm	3000K/4000K/5000K
903A-1200-36W	Direct	1140*68*50mm	36W	3600lm	3000K/4000K/5000K
903A-1800-54W	Direct	1700*68*50mm	54W	5400lm	3000K/4000K/5000K
903A-2400-72W	Direct	2260*68*50mm	72W	7200lm	3000K/4000K/5000K

*For other runs, please specify.


Mounting



Optional Connector

180° extender	L-shape conner	T-shape conner	X-shape conner
903A-I	903A-L-18W	903A-T-25W	903A-X-36W
N/A	18W	25W	36W
80*29*2mm	305*305*68*50mm	560*323*68*50mm	560*578*68*50mm

905A Recessed Trim Luminaires

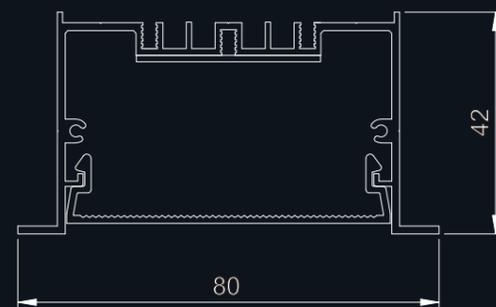


Description

- High transmittance PMMA diffuser creating a high visual comfort and very uniform lighting distributions
- Equipped with aluminum PCB for LED source, and high efficiency SMD LED light source up to 120lm/W
- Patented end-cap design to protect light leak
- Customized lighting system with the latest addition of system connection module accessories (180° extender/L-shape/T-shape/X-shape)
- Non-dimmable as standard or DALI available on request
- 3hrs Emergency available on request
- Life-time of 50,000 hrs, low luminous decay, low maintain cost
- 3 years warranty included
- Application: Offices, Educational Institutes, Hospitals, Warehouses, Retails Etc




Item number	Distribution	Dimension	Power	Flux(lm)	CCT
905A-600-18W	Direct	580*80*42mm	18W	1800lm	3000K/4000K/5000K
905A-1200-36W	Direct	1140*80*42mm	36W	3600lm	3000K/4000K/5000K
905A-1800-54W	Direct	1700*80*42mm	54W	5400lm	3000K/4000K/5000K
905A-2400-72W	Direct	2260*80*42mm	72W	7200lm	3000K/4000K/5000K

*For other runs, please specify.


Mounting



Optional Connector

180° extender	L-shape conner	T-shape conner	X-shape conner
905A-I	905A-L-18W	905A-T-25W	905A-X-36W
N/A	18W	25W	36W
80*70*2mm	303*303*80*42mm	560*338*80*42mm	560*596*80*42mm
			

906A Recessed Trim Luminaires

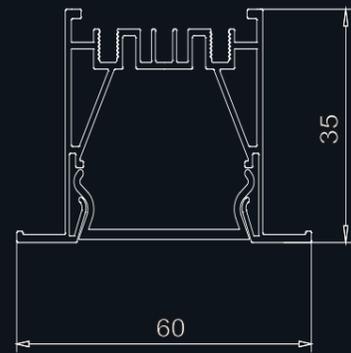


Description

- High transmittance PMMA diffuser creating a high visual comfort and very uniform lighting distributions
- Equipped with aluminum PCB for LED source, and high efficiency SMD LED light source up to 120lm/W
- Patented end-cap design to protect light leak
- Customized lighting system with the latest addition of system connection module accessories (180° extender/L-shape/T-shape/X-shape)
- Non-dimmable as standard or DALI available on request
- 3hrs Emergency available on request
- Life-time of 50,000 hrs, low luminous decay, low maintain cost
- 3 years warranty included
- Application: Offices, Educational Institutes, Hospitals, Warehouses, Retails Etc


Item number	Distribution	Dimension	Power	Flux(lm)	CCT
906A-600-18W	Direct	570*60*35mm	18W	1800lm	3000K/4000K/5000K
906A-1200-36W	Direct	1130*60*35mm	36W	3600lm	3000K/4000K/5000K
906A-1800-54W	Direct	1690*60*35mm	54W	5400lm	3000K/4000K/5000K
906A-2400-72W	Direct	2250*60*35mm	72W	7200lm	3000K/4000K/5000K

*For other runs, please specify.


Mounting



Optional Connector

180° extender	L-shape conner	T-shape conner	X-shape conner
906A-I	906A-L-18W	BX-906A-T-25W	906A-X-36W
N/A	18W	25W	36W
80*32*1.5mm	319*302*60*35mm	281*332*60*35mm	282*603*60*35mm
			

907A Recessed Trim Luminaires




Description

- High transmittance PMMA diffuser creating a high visual comfort and very uniform lighting distributions
- Equipped with aluminum PCB for LED source, and high efficiency SMD LED light source up to 120lm/W
- Patented end-cap design to protect light leak
- Customized lighting system with the latest addition of system connection module accessories (180° extender/L-shape/T-shape/X-shape)
- Non-dimmable as standard or DALI available on request
- 3hrs Emergency available on request
- Life-time of 50,000 hrs, low luminous decay, low maintain cost
- 3 years warranty included
- Application: Offices, Educational Institutes, Hospitals, Warehouses, Retails Etc

Item number	Distribution	Dimension	Power	Flux(lm)	CCT
907A-600-18W	Direct	570*84*82mm	18W	1800lm	3000K/4000K/5000K
907A-1200-36W	Direct	1130*84*82mm	36W	3600lm	3000K/4000K/5000K
907A-1800-54W	Direct	1690*84*82mm	54W	5400lm	3000K/4000K/5000K
907A-2400-72W	Direct	2250*84*82mm	72W	7200lm	3000K/4000K/5000K

*For other runs, please specify.


Mounting



Optional Connector

180° extender	L-shape conner	T-shape conner	X-shape conner
907A-I	907A-L-18W	907A-T-25W	907A-X-36W
N/A	18W	25W	36W
80*40*1.5mm/ 80*21*1.5mm	311*334*84*82mm	282*344*84*82mm	620*282*84*82mm

908A Recessed Trim Luminaires

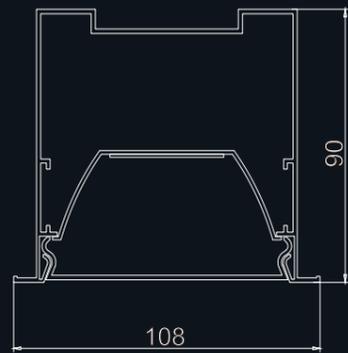

Description

- High transmittance PMMA diffuser creating a high visual comfort and very uniform lighting distributions
- Equipped with aluminum PCB for LED source, and high efficiency SMD LED light source up to 120lm/W
- Patented end-cap design to protect light leak
- Customized lighting system with the latest addition of system connection module accessories (180° extender/L-shape/T-shape/X-shape)
- Non-dimmable as standard or DALI available on request
- 3hrs Emergency available on request
- Life-time of 50,000 hrs, low luminous decay, low maintain cost
- 3 years warranty included
- Application: Offices, Educational Institutes, Hospitals, Warehouses, Retails Etc

Item number	Distribution	Dimension	Power	Flux(lm)	CCT
908A-600-18W	Direct	570*108*90mm	18W	1800lm	3000K/4000K/5000K
908A-1200-36W	Direct	1130*108*90mm	36W	3600lm	3000K/4000K/5000K
908A-1800-54W	Direct	1690*108*90mm	54W	5400lm	3000K/4000K/5000K
908A-2400-72W	Direct	2250*108*90mm	72W	7200lm	3000K/4000K/5000K

*For other runs, please specify.

Mounting



Optional Connector

180° extender	L-shape conner	T-shape conner	X-shape conner
908A-I	908A-L-18W	908A-T-25W	908A-X-36W
N/A	18W	25W	36W
80*40*1.5mm/ 80*21*1.5mm	358*300*108*90mm	369*283*108*90mm	646*282*108*90mm

