


**LIGHTING  
COLLECTION  
2023**



# PRODUCT CLASSIFICATION NAVIGATION

<b>MAGNETIC SUCTION TRACK LIGHT</b> 	<b>RECESSED CANISTER LIGHT</b> 	<b>PLAIN CANISTER SPOTLIGHTS</b> 	<b>DROP LIGHT</b> 	<b>WALL LAMP</b> 
05-70	71-152	153-229	230-340	341-418

## Whole house lighting simulation

The proportion of home design without main light is very large, which makes the whole space more three-dimensional and hierarchical



# 100+

Professional designer – no main light point service

Design



Offer




Collocation



Style



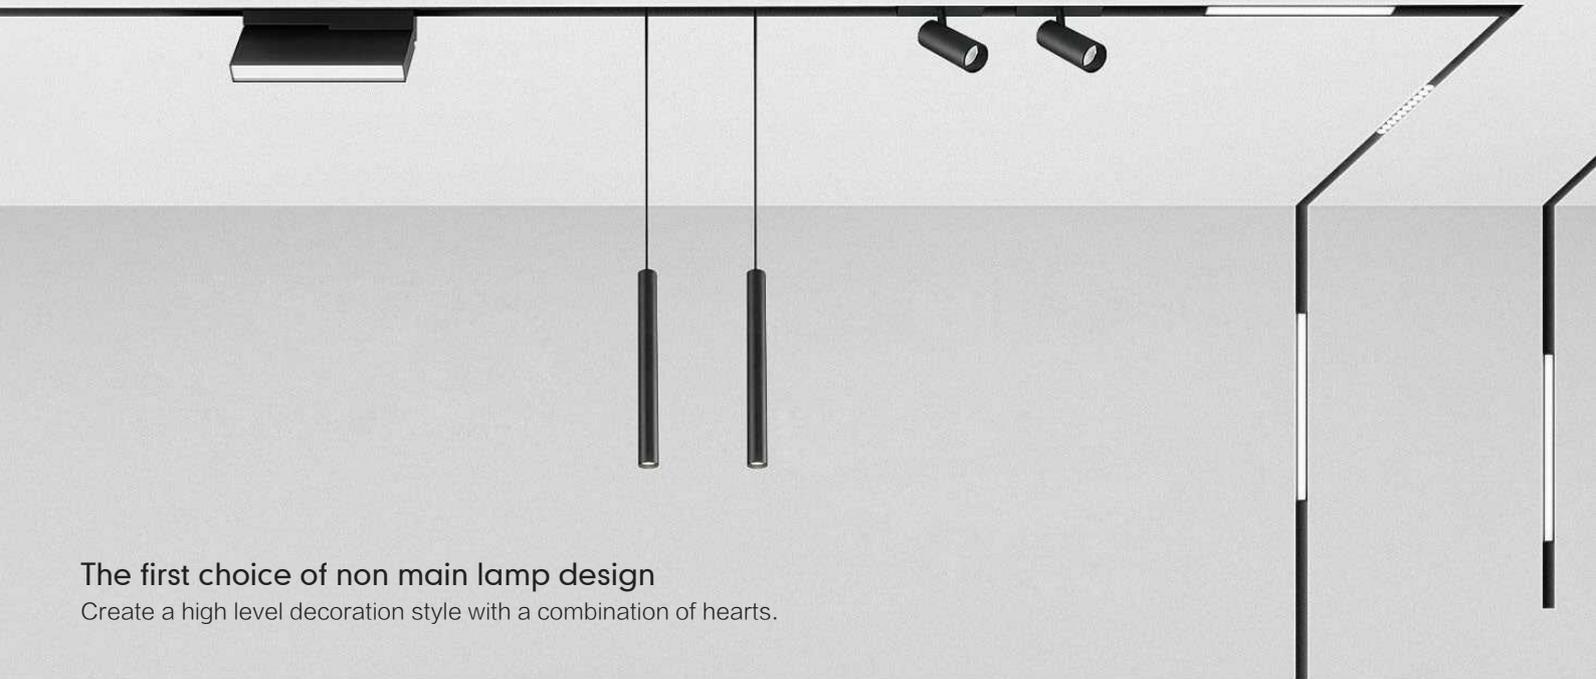

## The first choice of non main lamp design

Create a high level decoration style with a combination of hearts.

Lighting

Designers

Stories



Magnetic suction track embedded




Magnetic track mini



Magnetic rail droplight




Magnetic track folding



Thick material magnet



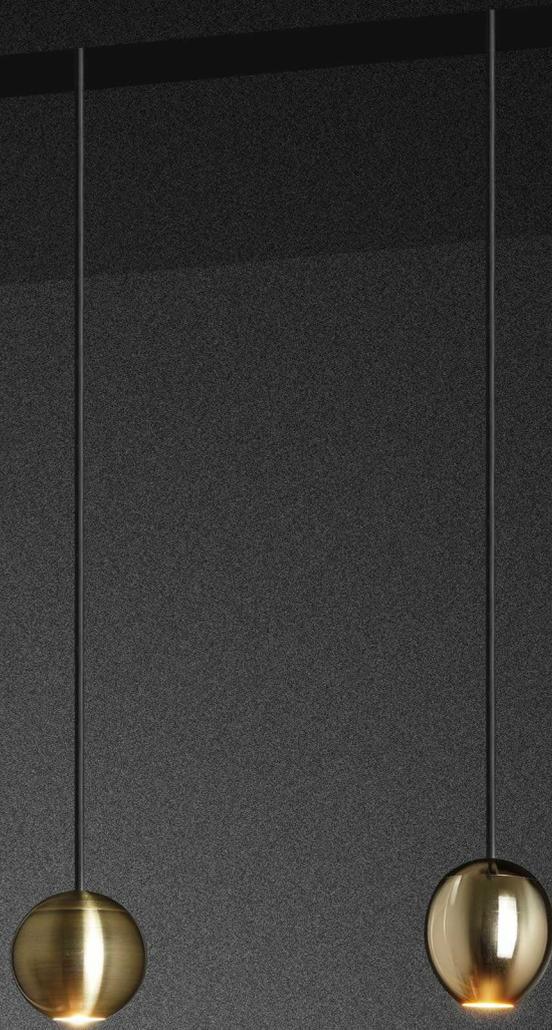


Product series

AP-DY-0010A-6W



MAGNETIC LED  
TRACK LIGHT

TECHNICAL SPECIFICATIONS	
Input (Optional)	48V~50/60 Hz
Maximum Wattage	6W±10% Max
Number of LEDs	
1 LEDs COB	
Luminous Flux	
357LM (3000K)	
Main Material	
Aluminum & PC Lens Diffuser	
Color Temperature	
3000K / 4000K / 6500K	
CRI	≥90
Power Factor	≥0.8
Working Temperature	-10°C~45°C
Beam Angle (Optional)	18°
Fixture Dimmable	Non-dimmable
Electrical	Internal Driver
Protection class	IP20

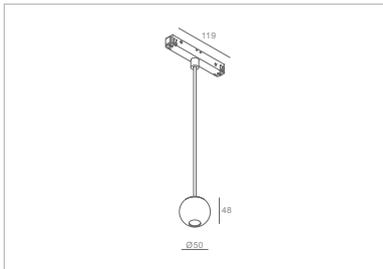

**Especially designed for:**  
Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.



Product Model No.	AP-DZ-0050A-6W	
Packaging Detail	51.5×21.5×30.5cm	
	STD PKG	30pcs
	N.W	10.2kgs
	G.W	13.2kgs

## AP-DZ-0050A-6W

6W LED 3000K 357lm / incl. - Driver SEC: Constant Current: DC150mA  
PRI: 48V~ 50/60 Hz 0.050A



Warm White 3000K ∠ 18°

Height	illuminance	Diameter
1m	2099.99lx	33.47cm
2m	525.00lx	66.94cm
3m	233.33lx	100.41cm
4m	131.25lx	133.87cm
5m	84.00lx	167.34cm

### Option colors



Various Brand of COB LED Light Source:



MAGNETIC LED  
TRACK LIGHT

TECHNICAL SPECIFICATIONS

Input (Optional)	220-240V~50/60 Hz
Maximum Wattage	6W±10% Max

Number of LEDs	1 LEDs COB
----------------	------------

Luminous Flux	357LM (3000K)
---------------	---------------

Main Material	Aluminum & PC Lens Diffuser
---------------	-----------------------------

Color Temperature	3000K / 4000K / 6500K
-------------------	-----------------------

CRI	≥90
-----	-----

Power Factor	≥0.8
--------------	------


Working Temperature	-10°C~45°C
---------------------	------------

Beam Angle (Optional)	18°
-----------------------	-----

Fixture Dimmable	Non-dimmable
------------------	--------------

Electrical	Internal Driver
------------	-----------------

Protection class	IP20
------------------	------

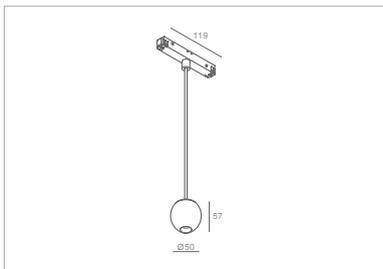

Especially designed for:

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.



Product Model No.	AP-DZ-0051A-6W	
Packaging Detail 	51.5×21.5×30.5cm	
	STD PKG	30pcs
	N.W	10.8kgs
	G.W	13.8kgs


AP-DZ-0051A-6W

PRI: 220-240 V~ 50/60 Hz 0.050A

6W LED 3000K 357lm / incl. - Driver SEC: Constant Current; DC150mA



Warm White 3000K ∠ 18°

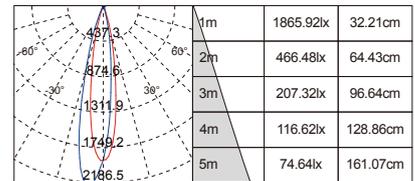

cd Height illuminance Diameter

Option colors



Various Brand of COB LED Light Source:





Product series

AP-DY-0072A-6W



MAGNETIC LED  
TRACK LIGHT

TECHNICAL SPECIFICATIONS

Input (Optional)	220-240V~50/60 Hz
Maximum Wattage	7W±10% Max

Number of LEDs	1 LEDs COB
----------------	------------

Luminous Flux	375LM (3000K)
---------------	---------------

Main Material	Aluminum & PC Lens Diffuser
---------------	-----------------------------

Color Temperature	3000K / 4000K / 6500K
-------------------	-----------------------

CRI	≥90
-----	-----

Power Factor	≥0.8
--------------	------


Working Temperature	-10°C~45°C
---------------------	------------

Beam Angle (Optional)	18°
-----------------------	-----

Fixture Dimmable	Non-dimmable
------------------	--------------

Electrical	Internal Driver
------------	-----------------

Protection class	IP20
------------------	------

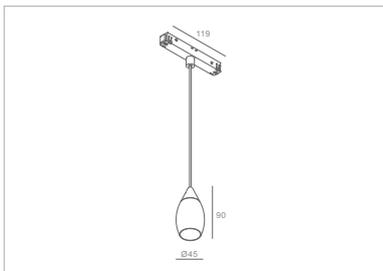

Especially designed for:

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.




Product Model No.	AP-DZ-0072-6W	
Packaging Detail	45×45×41cm	
	STD PKG	18pcs
	N.W	6.34kgs
	G.W	9.34kgs

AP-DZ-0072-6W

DC30-42VDC7W LED 3000K/ PRI:375lm220-240/ incl. -V~ 50/60 Hz 0.050A  
Driver SEC: Constant Current: DC170mA



Warm White 3000K ∠ 18°

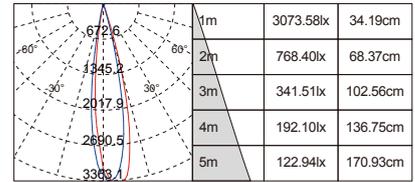

cd Height illuminance Diameter

Option colors



Various Brand of COB LED Light Source:



MAGNETIC LED  
TRACK LIGHT

TECHNICAL SPECIFICATIONS

Input (Optional)	220-240V~50/60 Hz
Maximum Wattage	7W±10% Max

Number of LEDs	1 LEDs COB
----------------	------------

Luminous Flux	486LM (3000K)
---------------	---------------

Main Material	Aluminum & PC Lens Diffuser
---------------	-----------------------------

Color Temperature	3000K / 4000K / 6500K
-------------------	-----------------------

CRI	≥90
-----	-----

Power Factor	≥0.8
--------------	------


Working Temperature	-10°C~45°C
---------------------	------------

Beam Angle (Optional)	18°
-----------------------	-----

Fixture Dimmable	Non-dimmable
------------------	--------------

Electrical	Internal Driver
------------	-----------------

Protection class	IP20
------------------	------

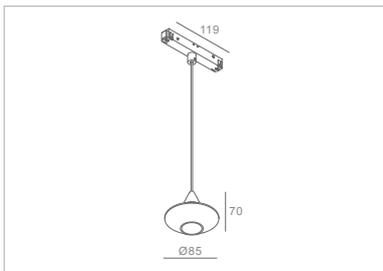

**Especially designed for:**

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.




Product Model No.	AP-DZ-0073-7W	
Packaging Detail	45×45×41cm	
	STD PKG	12pcs
	N.W	9.13kgs
	G.W	12.13kgs

**AP-DZ-0073-7W**

7WDC30-42VDCLED 3000K/ PRI:486lm220-240/ incl. ~50/60  
HzDriver0.050ASEC: Constant Current; DC170mA



Warm White 3000K ∠ 18°

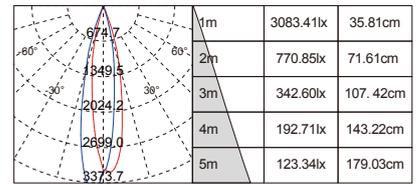

cd      Height      illuminance      Diameter

**Option colors**



**Various Brand of COB LED Light Source:**



Product series

**AP-DY-0030A-6W**



MAGNETIC LED  
TRACK LIGHT

TECHNICAL SPECIFICATIONS

Input (Optional)	48V~50/60 Hz
Maximum Wattage	6W±10% Max

Number of LEDs	1 LED COB
----------------	-----------

Luminous Flux	528LM (3000K)
---------------	---------------

Main Material	Aluminum & PC Lens Diffuser
---------------	-----------------------------

Color Temperature	3000K / 4000K / 6500K
-------------------	-----------------------

CRI	≥90
-----	-----

Power Factor	≥0.8
--------------	------


Working Temperature	-10°C~45°C
---------------------	------------

Beam Angle (Optional)	24°
-----------------------	-----

Fixture Dimmable	Non-dimmable
------------------	--------------

Electrical	Internal Driver
------------	-----------------

Protection class	IP20
------------------	------

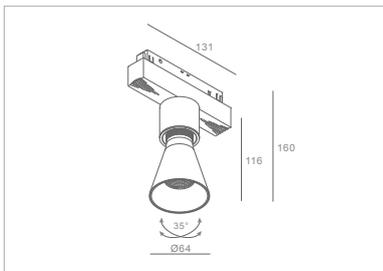

Especially designed for:

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.




Product Model No.	AP-DY-0030A-6W	
Packaging Detail	55×51.5×38cm	
	STD PKG	30pcs
	N.W	7.14kgs
	G.W	9.14kgs

AP-DY-0030A-6W

6WDC30-42VDCLED 3000K/ PRI:528lm220-240/ incl.  $\sim$  50/60 HzDriver0.050ASEC: Constant Current: DC150mA



Warm White 3000K  $\angle$  24°

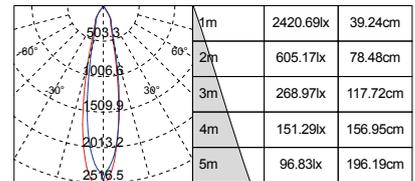

cd Height illuminance Diameter

Option colors



Various Brand of COB LED Light Source:



Product series

**AP-DY-0031A-6W**



MAGNETIC LED  
TRACK LIGHT

TECHNICAL SPECIFICATIONS

Input (Optional)	48V~50/60 Hz
Maximum Wattage	6W±10% Max

Number of LEDs	1 LED COB
----------------	-----------

Luminous Flux	528LM (3000K)
---------------	---------------

Main Material	Aluminum & PC Lens Diffuser
---------------	-----------------------------

Color Temperature	3000K / 4000K / 6500K
-------------------	-----------------------

CRI	≥90
-----	-----

Power Factor	≥0.8
--------------	------


Working Temperature	-10°C~45°C
---------------------	------------

Beam Angle (Optional)	24°
-----------------------	-----

Fixture Dimmable	Non-dimmable
------------------	--------------

Electrical	Internal Driver
------------	-----------------

Protection class	IP20
------------------	------

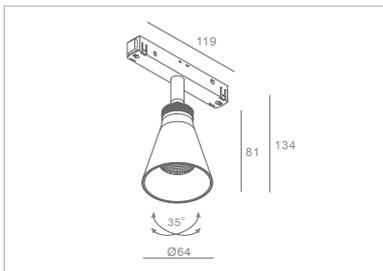

Especially designed for:

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.




Product Model No.	AP-DY-0031A-6W	
Packaging Detail 	55×51.5×38cm	
	STD PKG	30pcs
	N.W	4.89kgs
	G.W	6.89kgs

AP-DY-0031A-6W

DC30-42VDC7W LED 3000K/ PRI:528lm220-240/ incl. -V~ 50/60 Hz 0.050A  
Driver SEC: Constant Current: DC150mA



Warm White 3000K ∠ 24°

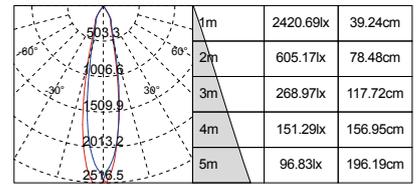

cd Height illuminance Diameter

Option colors




Various Brand of COB LED Light Source:



Product series

# AP-DY-0040A-10W

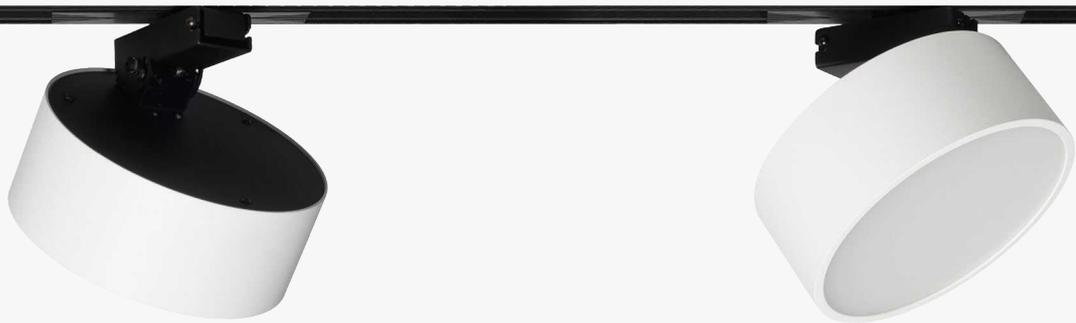

MAGNETIC LED  
TRACK LIGHT

TECHNICAL SPECIFICATIONS

<b>Input (Optional)</b>	48V~50/60 Hz
<b>Maximum Wattage</b>	10W±10% Max

<b>Number of LEDs</b>	120 LEDs SMD
-----------------------	--------------

<b>Luminous Flux</b>	883LM (3000K)
----------------------	---------------

<b>Main Material</b>	Aluminum & PC
----------------------	---------------

<b>Color Temperature</b>	3000K / 4000K / 6500K
--------------------------	-----------------------

<b>CRI</b>	≥90
------------	-----

<b>Power Factor</b>	≥0.92
---------------------	-------


<b>Working Temperature</b>	-10°C~45°C
----------------------------	------------

<b>Beam Angle (Optional)</b>	110°
------------------------------	------

<b>Fixture Dimmable</b>	Non-dimmable
-------------------------	--------------

<b>Electrical</b>	Internal Driver
-------------------	-----------------

<b>Protection class</b>	IP20
-------------------------	------

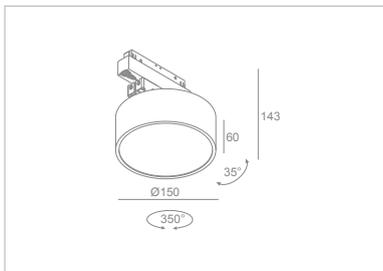

**Especially designed for:**

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.




<b>Product Model No.</b>	AP-DY-0040A-10W	
<b>Packaging Detail</b> 	42×42×35cm	
	STD PKG	8pcs
	N.W	4.37kgs
	G.W	6.37kgs

**AP-DY-0040A-10W**

10W LED 3000K 883lm / incl. MEGALUX Driver SEC: Constant Current: DC250mA/DC36V



Warm White 3000K ∠110°

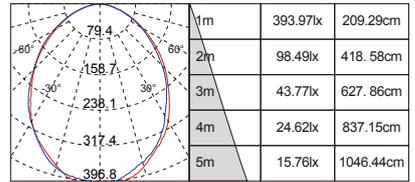

cd      Height      illuminance      Diameter

**Option colors**



**Various Brand of SMD LED Light Source:**



MAGNETIC LED  
TRACK LIGHT

TECHNICAL SPECIFICATIONS

Input (Optional)	48V~50/60 Hz
Maximum Wattage	20W±10% Max

Number of LEDs	288 LEDs SMD
----------------	--------------

Luminous Flux	1982LM (3000K)
---------------	----------------

Main Material	Aluminum & PC
---------------	---------------

Color Temperature	3000K / 4000K / 6500K
-------------------	-----------------------

CRI	≥90
-----	-----

Power Factor	≥0.92
--------------	-------


Working Temperature	-10°C~45°C
---------------------	------------

Beam Angle (Optional)	110°
-----------------------	------

Fixture Dimmable	Non-dimmable
------------------	--------------

Electrical	Internal Driver
------------	-----------------

Protection class	IP20
------------------	------

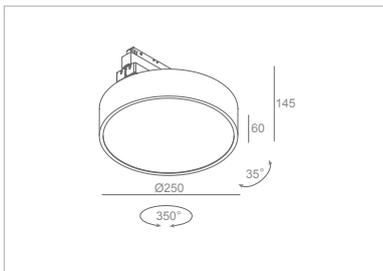

**Especially designed for:**

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.




Product Model No.	AP-DY-0041A-20W	
Packaging Detail	31.5×31.5×53.5cm	
	STD PKG	3pcs
	N.W	11kgs
	G.W	13.5kgs

**AP-DY-0041A-20W**

20W LED 3000K 1982lm / incl. MEGALUX Driver SEC: Constant Current: DC500mADC36V



Warm White 3000K ∠110°

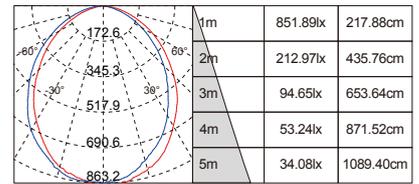

cd Height illuminance Diameter

**Option colors**



**Various Brand of COB LED Light Source:**



Product series


**AP-DY-0042A-10W**



MAGNETIC LED  
TRACK LIGHT

TECHNICAL SPECIFICATIONS

<b>Input (Optional)</b>	48V~50/60 Hz
<b>Maximum Wattage</b>	10W±10% Max
<b>Number of LEDs</b>	
120 LEDs SMD	
<b>Luminous Flux</b>	
883LM (3000K)	
<b>Main Material</b>	
Aluminum & PC	
<b>Color Temperature</b>	
3000K / 4000K / 6500K	
<b>CRI</b>	≥90
<b>Power Factor</b>	≥0.92
<b>Working Temperature</b>	-10°C~45°C
<b>Beam Angle (Optional)</b>	110°
<b>Fixture Dimmable</b>	Non-dimmable
<b>Electrical</b>	Internal Driver
<b>Protection class</b>	IP20

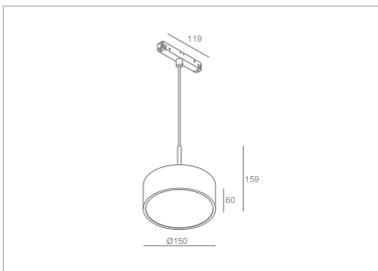

**Especially designed for:**

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.




<b>Product Model No.</b>	AP-DY-0042A-10W	
<b>Packaging Detail</b>	68.5×48×42cm	
	STD PKG	12pcs
	N.W	4.96kgs
	G.W	6.96kgs

**AP-DY-0042A-10W**

10W LED 3000K 883lm / incl. MEGALUX Driver SEC: Constant Current: DC250mADC36V



Warm White 3000K ∠110°

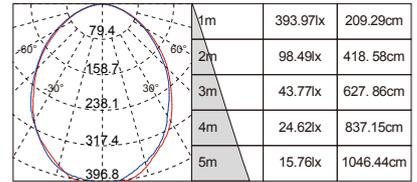

cd      Height      illuminance      Diameter

**Option colors**



**Various Brand of SMD LED Light Source:**



MAGNETIC LED  
TRACK LIGHT

TECHNICAL SPECIFICATIONS

Input (Optional)	48V~50/60 Hz
Maximum Wattage	20W±10% Max

Number of LEDs	288 LEDs SMD
----------------	--------------

Luminous Flux	1982LM (3000K)
---------------	----------------

Main Material	Aluminum & PC
---------------	---------------

Color Temperature	3000K / 4000K / 6500K
-------------------	-----------------------

CRI	≥90
-----	-----

Power Factor	≥0.92
--------------	-------


Working Temperature	-10°C~45°C
---------------------	------------

Beam Angle (Optional)	110°
-----------------------	------

Fixture Dimmable	Non-dimmable
------------------	--------------

Electrical	Internal Driver
------------	-----------------

Protection class	IP20
------------------	------

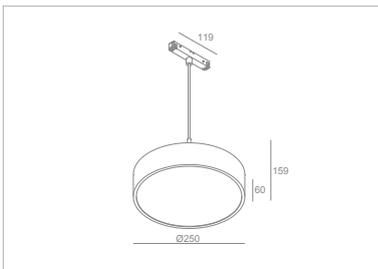

**Especially designed for:**

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.




Product Model No.	AP-DY-0043A-20W	
Packaging Detail	47×32×64cm	
	STD PKG	4pcs
	N.W	11kgs
	G.W	13.5kgs

**AP-DY-0043A-20W**

20W LED 3000K 1982lm / incl. MEGALUX Driver SEC: Constant Current: DC500mA DC36V



Warm White 3000K ∠110°

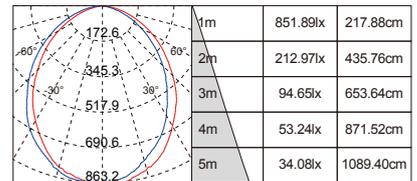


cd Height illuminance Diameter

**Option colors**



Various Brand of SMD LED Light Source:



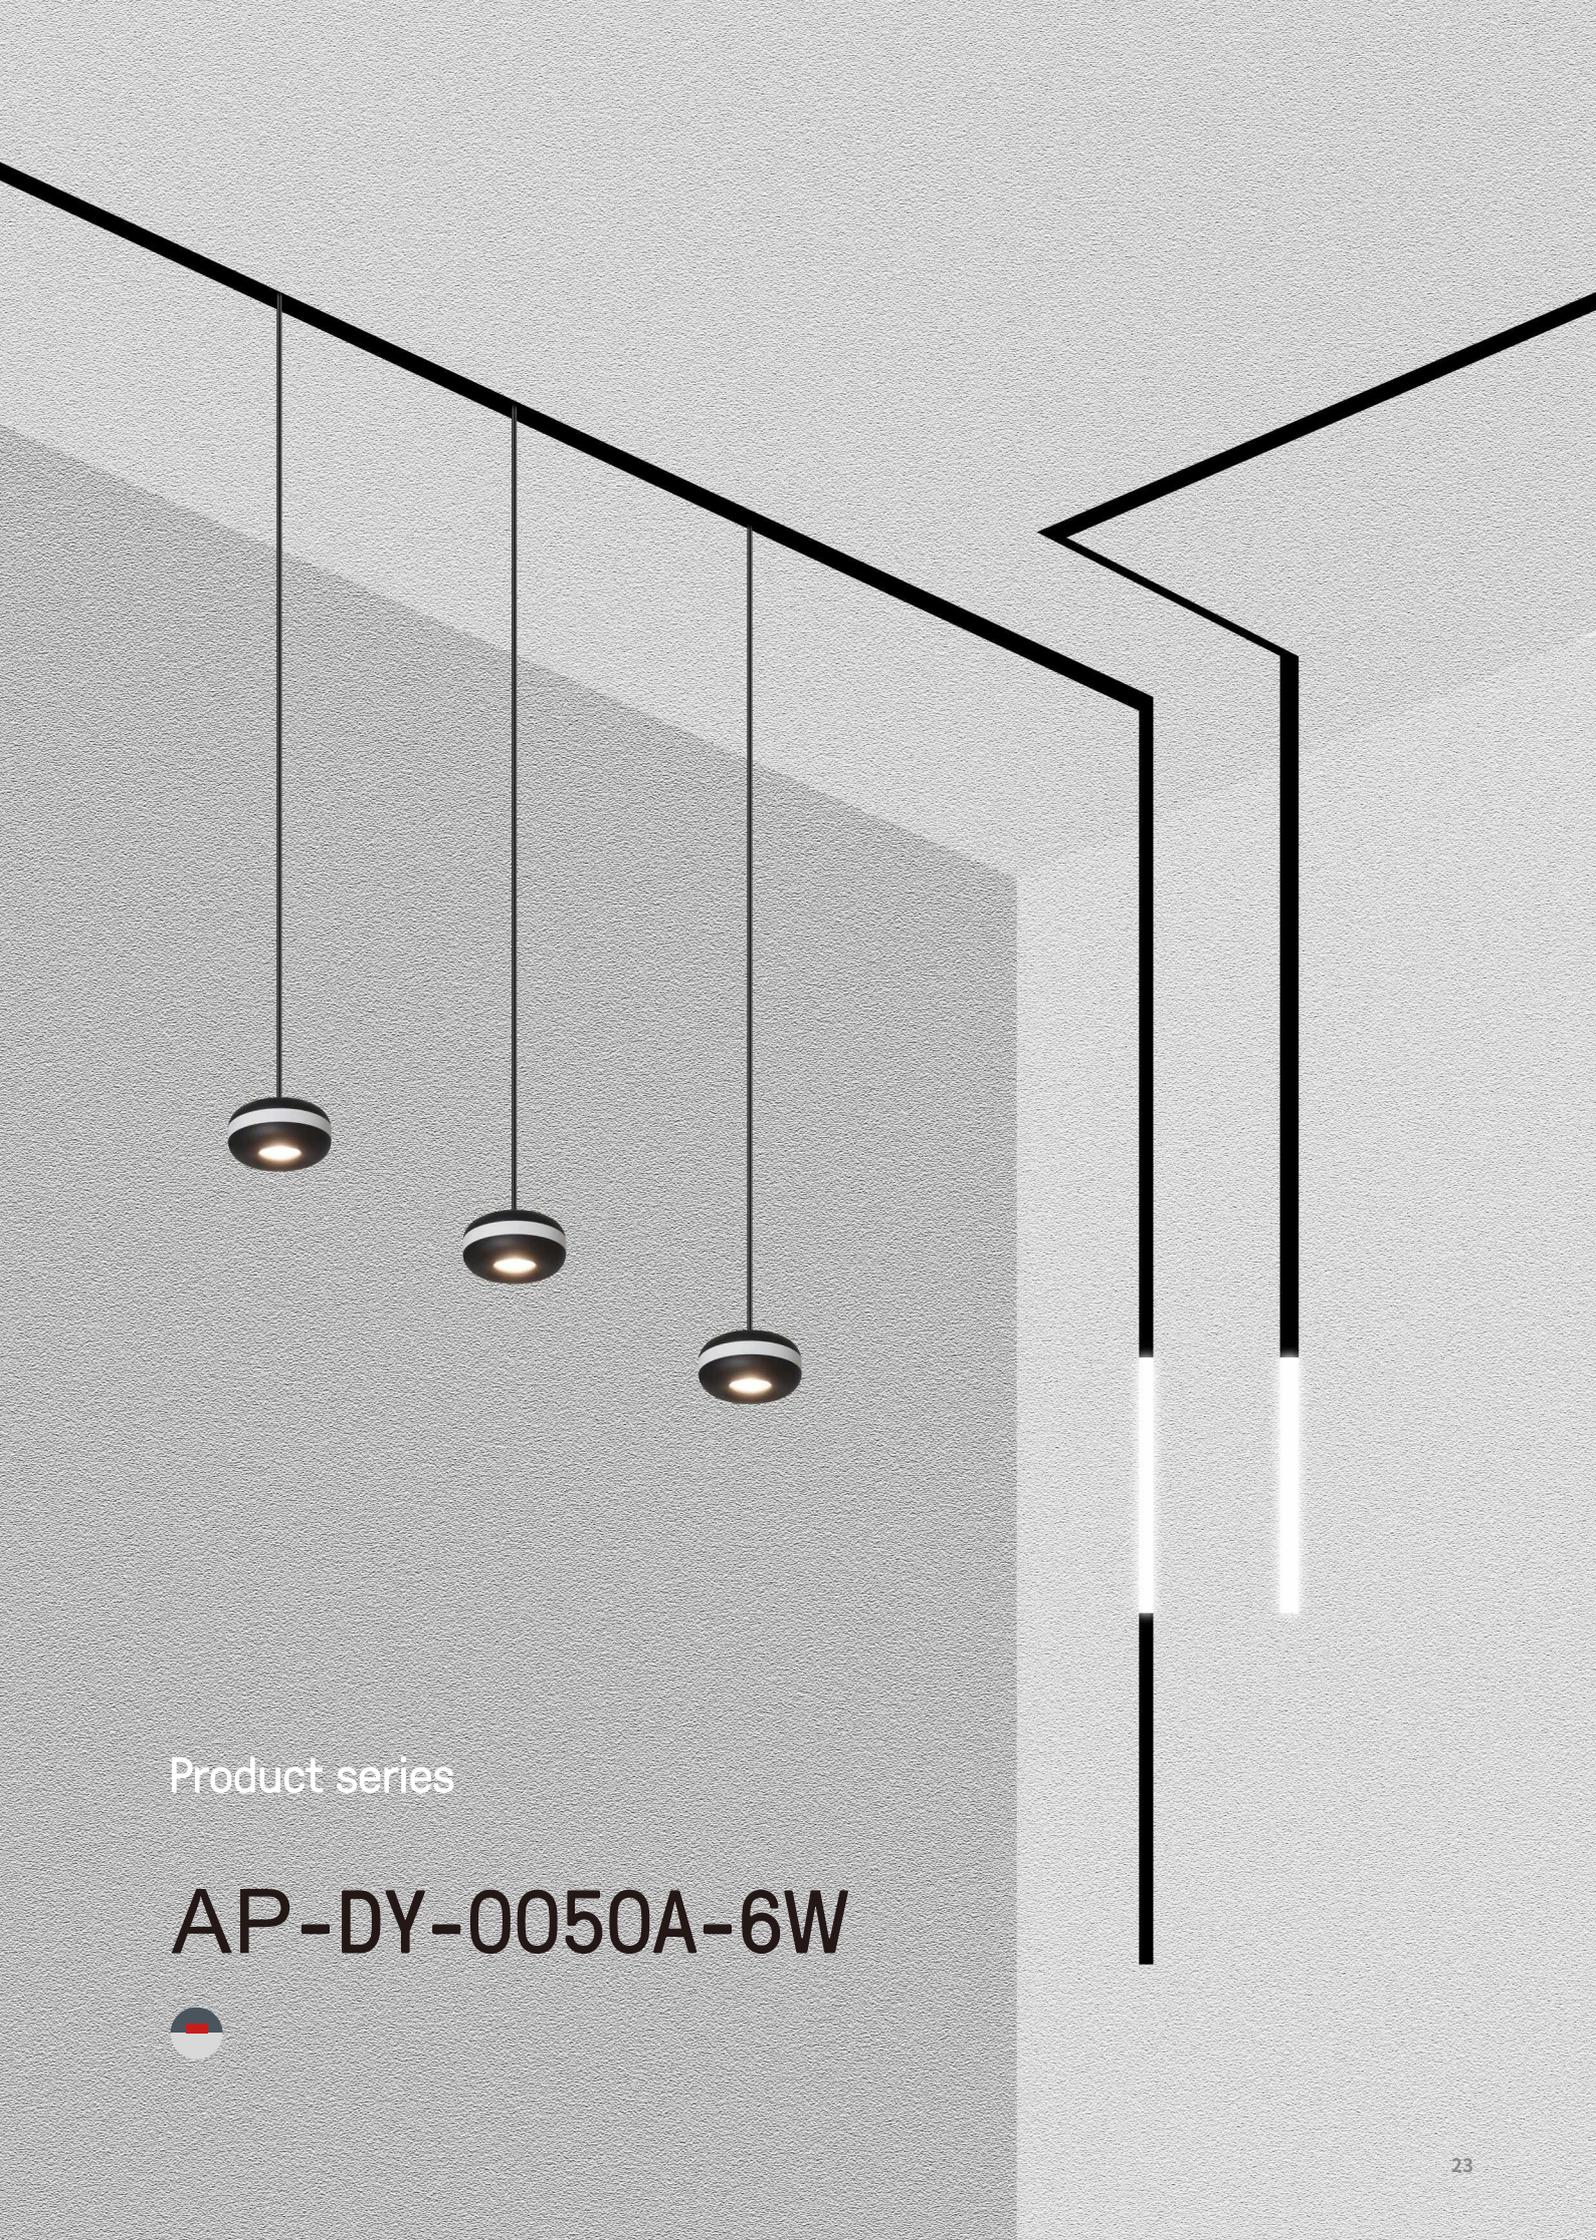

Product series


**AP-DY-0050A-6W**



MAGNETIC LED  
TRACK LIGHT

TECHNICAL SPECIFICATIONS

<b>Input (Optional)</b>	220-240V~50/60 Hz
<b>Maximum Wattage</b>	6W±10% Max
<b>Number of LEDs</b>	
1 LEDs COB	
<b>Luminous Flux</b>	
476LM (3000K)	
<b>Main Material</b>	
Aluminum & PC Lens Diffuser	
<b>Color Temperature</b>	
3000K / 4000K / 6500K	
<b>CRI</b>	≥90
<b>Power Factor</b>	≥0.8
<b>Working Temperature</b>	-10°C~45°C
<b>Beam Angle (Optional)</b>	24°
<b>Fixture Dimmable</b>	Non-dimmable
<b>Electrical</b>	Internal Driver
<b>Protection class</b>	IP20

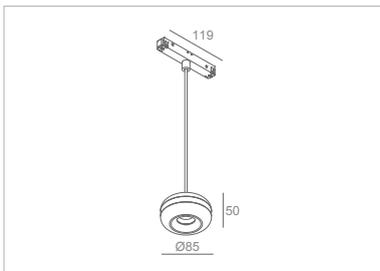

Especially designed for:

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.




<b>Product Model No.</b>	AP-DY-0050A-6W	
<b>Packaging Detail</b> 	39.5×26.5×30cm	
	STD PKG	12pcs
	N.W	5kgs
	G.W	6.5kgs

AP-DY-0050A-6W

DC30-42VDC6W LED 3000K/ PRI:476lm220-240/ incl. -V~ 50/60 Hz  
0.050A Driver SEC: Constant Current:DC1700mA



Warm White 3000K ∠ 24°

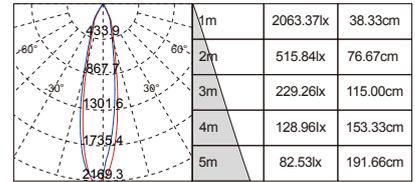

cd Height illuminance Diameter

Option colors



Various Brand of COB LED Light Source:



MAGNETIC LED  
TRACK LIGHT

TECHNICAL SPECIFICATIONS

Input (Optional)	220-240V~50/60 Hz
Maximum Wattage	10W±10% Max

Number of LEDs	1 LEDs COB
----------------	------------

Luminous Flux	766LM (3000K)
---------------	---------------

Main Material	Aluminum & PC Lens Diffuser
---------------	-----------------------------

Color Temperature	3000K / 4000K / 6500K
-------------------	-----------------------

CRI	≥90
-----	-----

Power Factor	≥0.92
--------------	-------


Working Temperature	-10°C~45°C
---------------------	------------

Beam Angle (Optional)	24°
-----------------------	-----

Fixture Dimmable	Non-dimmable
------------------	--------------

Electrical	Internal Driver
------------	-----------------

Protection class	IP20
------------------	------

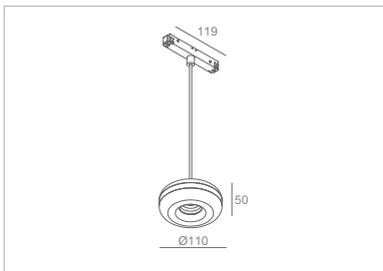

Especially designed for:

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.




Product Model No.	AP-DY-0051A-10W	
Packaging Detail	33×32.5×37cm	
	STD PKG	8pcs
	N.W	5.42kgs
	G.W	7.4kgs

AP-DY-0051A-10W

DC30-42VDC10W LED 3000K/ PRI:766lm220-240/ incl.V~-50/60 Hz 0.065A Driver SEC: Constant Current: DC250mA



Warm White 3000K ∠24°

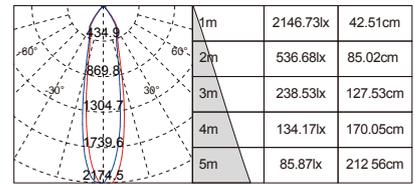

cd Height illuminance Diameter

Option colors




Various Brand of COB LED Light Source:



MAGNETIC LED  
TRACK LIGHT

TECHNICAL SPECIFICATIONS	
Input (Optional)	220-240V~50/60 Hz
Maximum Wattage	15W±10% Max
Number of LEDs	
1 LEDs COB	
Luminous Flux	
965LM (3000K)	
Main Material	
Aluminum & PC Lens Diffuser	
Color Temperature	
3000K / 4000K / 6500K	

CRI	≥90
Power Factor	≥0.92
Working Temperature	-10°C~45°C
Beam Angle (Optional)	24°
Fixture Dimmable	Non-dimmable
Electrical	Internal Driver
Protection class	IP20

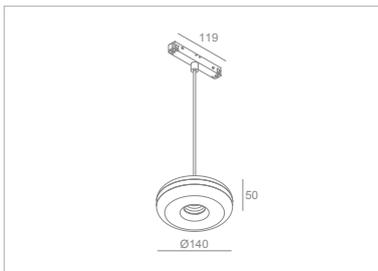

**Especially designed for:**

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.




Product Model No.	AP-DY-0052A-15W	
Packaging Detail	39.5×38.5×37cm	
	STD PKG	8pcs
	N.W	7.23kgs
	G.W	9kgs

AP-DY-0052A-15W  
15WDC30-42VDCLED 3000K/ PRI:965lm220-240/ incl. V-- Driver50/60SEC:Hz 0.088AConstant Current: DC360mA



Warm White 3000K ∠ 24°

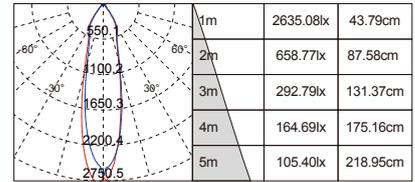

cd Height illuminance Diameter

**Option colors**




**Various Brand of COB LED Light Source:**



Product series

**AP-DY-0060A-6W**

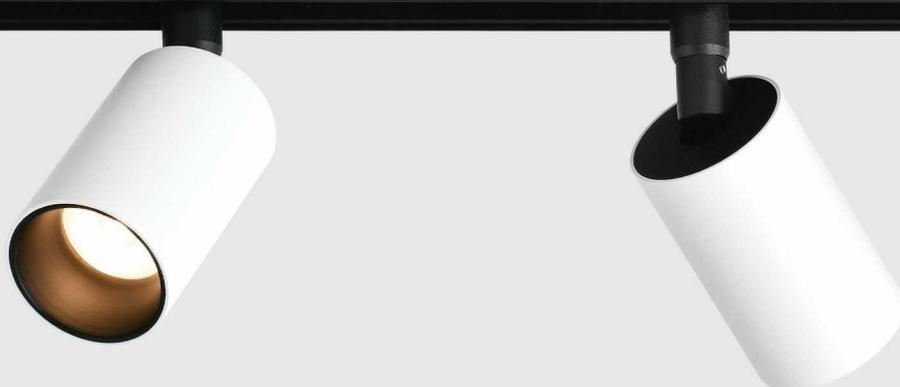

MAGNETIC LED  
TRACK LIGHT

TECHNICAL SPECIFICATIONS

Input (Optional)	48V~50/60 Hz
Maximum Wattage	6W±10% Max

Number of LEDs	1 LEDs COB
----------------	------------

Luminous Flux	476LM (3000K)
---------------	---------------

Main Material	Aluminum & PC Lens Diffuser
---------------	-----------------------------

Color Temperature	3000K / 4000K / 6500K
-------------------	-----------------------

CRI	≥90
-----	-----

Power Factor	≥0.8
--------------	------


Working Temperature	-10°C~45°C
---------------------	------------

Beam Angle (Optional)	24°
-----------------------	-----

Fixture Dimmable	Non-dimmable
------------------	--------------

Electrical	Internal Driver
------------	-----------------

Protection class	IP20
------------------	------

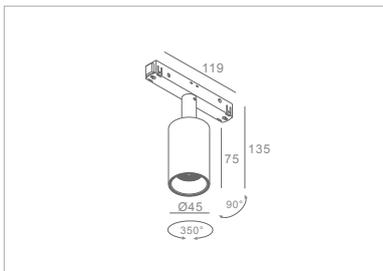

**Especially designed for:**

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.




Product Model No.	AP-DY-0060A-6W	
Packaging Detail 	51.5×37.5×37.5cm	
	STD PKG	30pcs
	N.W	5.55kgs
	G.W	7.55kgs

**AP-DY-0060A-6W**

Integrated 48V DC input. Dimming Options:0- 10V,Dali,2.4G



Warm White 3000K ∠ 24°

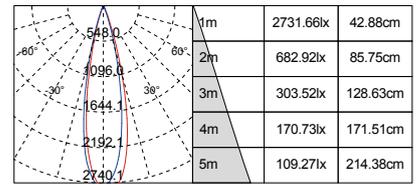

cd      Height      illuminance      Diameter

**Option colors**



**Various Brand of COB LED Light Source:**



MAGNETIC LED  
TRACK LIGHT

TECHNICAL SPECIFICATIONS

Input (Optional)	48V~50/60 Hz
Maximum Wattage	15W±10% Max

Number of LEDs	1 LEDs COB
----------------	------------

Luminous Flux	867LM (3000K)
---------------	---------------

Main Material	Aluminum & PC Lens Diffuser
---------------	-----------------------------

Color Temperature	3000K / 4000K / 6500K
-------------------	-----------------------

CRI	≥90
-----	-----

Power Factor	≥0.92
--------------	-------


Working Temperature	-10°C~45°C
---------------------	------------

Beam Angle (Optional)	24°
-----------------------	-----

Fixture Dimmable	Non-dimmable
------------------	--------------

Electrical	Internal Driver
------------	-----------------

Protection class	IP20
------------------	------

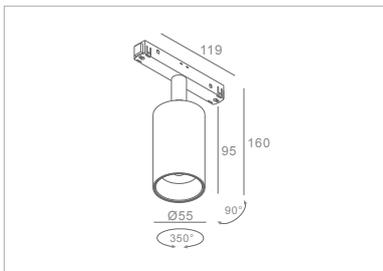

Especially designed for:

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.




Product Model No.	AP-DY-0061A-15W	
Packaging Detail	51.5×42.5×43cm	
	STD PKG	30pcs
	N.W	8.16kgs
	G.W	10.16kgs

AP-DY-0061A-15W

Integrated 48V DC input. Dimming Options:0- 10V,Dali,2.4G



Warm White 3000K ∠ 24°

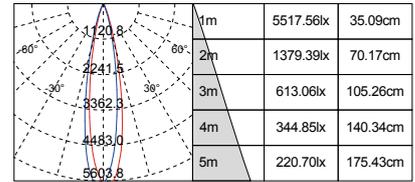

cd Height illuminance Diameter

Option colors




Various Brand of COB LED Light Source:



Product series

**AP-DY-0062A-6W**

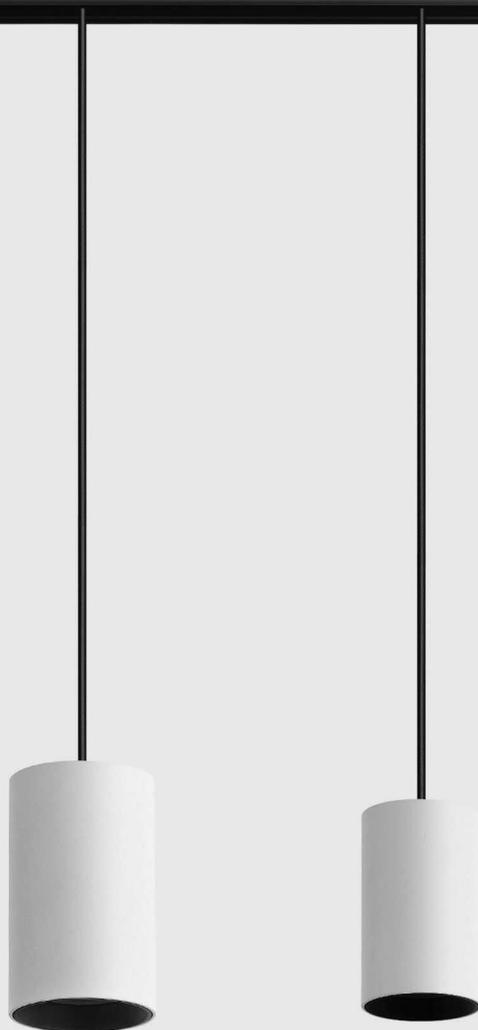

MAGNETIC LED  
TRACK LIGHT

TECHNICAL SPECIFICATIONS

Input (Optional)	48V~50/60 Hz
Maximum Wattage	6W±10% Max

Number of LEDs	1 LED COB
----------------	-----------

Luminous Flux	476LM (3000K)
---------------	---------------

Main Material	Aluminum & PC Lens Diffuser
---------------	-----------------------------

Color Temperature	3000K / 4000K / 6500K
-------------------	-----------------------

CRI	≥90
-----	-----

Power Factor	≥0.8
--------------	------


Working Temperature	-10°C~45°C
---------------------	------------

Beam Angle (Optional)	24°
-----------------------	-----

Fixture Dimmable	Non-dimmable
------------------	--------------

Electrical	Internal Driver
------------	-----------------

Protection class	IP20
------------------	------

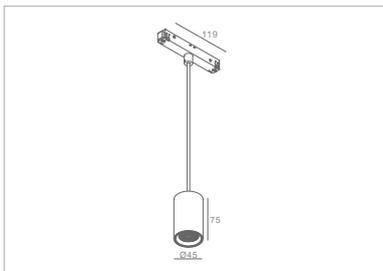

**Especially designed for:**

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.




Product Model No.	AP-DY-0062A-6W	
Packaging Detail 	51.5×37.5×37.5cm	
	STD PKG	30pcs
	N.W	6.66kgs
	G.W	8.7kgs

**AP-DY-0062A-6W**

Integrated 48V DC input. Dimming Options:0- 10V,Dali,2.4G



Warm White 3000K ∠24°

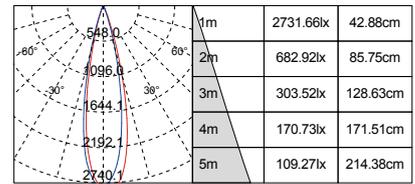

cd      Height      illuminance      Diameter

**Option colors**



**Various Brand of COB LED Light Source:**



MAGNETIC LED  
TRACK LIGHT

TECHNICAL SPECIFICATIONS

Input (Optional)	48V~50/60 Hz
Maximum Wattage	15W±10% Max

Number of LEDs	1 LED COB
----------------	-----------

Luminous Flux	867LM (3000K)
---------------	---------------

Main Material	Aluminum & PC Lens Diffuser
---------------	-----------------------------

Color Temperature	3000K / 4000K / 6500K
-------------------	-----------------------

CRI	≥90
-----	-----

Power Factor	≥0.92
--------------	-------


Working Temperature	-10°C~45°C
---------------------	------------

Beam Angle (Optional)	24°
-----------------------	-----

Fixture Dimmable	Non-dimmable
------------------	--------------

Electrical	Internal Driver
------------	-----------------

Protection class	IP20
------------------	------

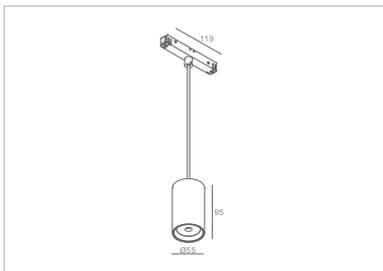

Especially designed for:

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.




Product Model No.	AP-DY-0064A-15W	
Packaging Detail	51.5×42.5×43cm	
	STD PKG	30pcs
	N.W	8.49kgs
	G.W	10.49kgs

AP-DY-0064A-15W

Integrated 48V DC input. Dimming Options:0- 10V,Dali,2.4G



Warm White 3000K ∠24°

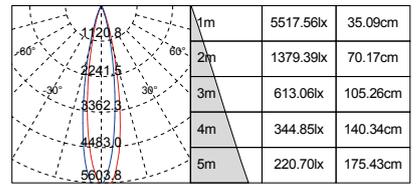

cd Height illuminance Diameter

Option colors




Various Brand of COB LED Light Source:



Product series

**AP-DY-0070A-12W**

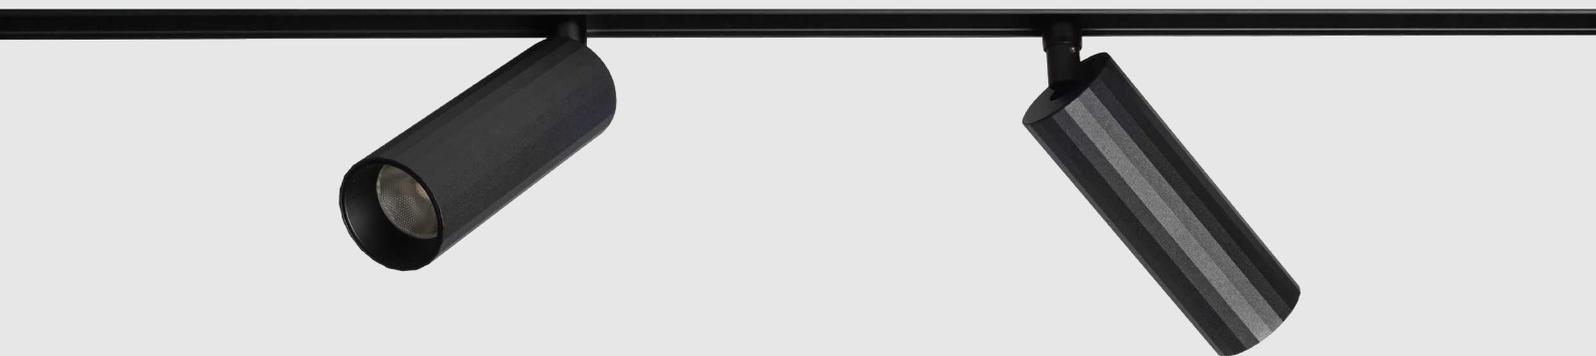

MAGNETIC LED  
TRACK LIGHT

TECHNICAL SPECIFICATIONS

Input (Optional)	220-240V~50/60 Hz
Maximum Wattage	12W±10% Max

Number of LEDs	1 LEDs COB
----------------	------------

Luminous Flux	822LM (3000K)
---------------	---------------

Main Material	Aluminum & PC Lens Diffuser
---------------	-----------------------------

Color Temperature	3000K / 4000K / 6500K
-------------------	-----------------------

CRI	≥90
-----	-----

Power Factor	≥0.8
--------------	------


Working Temperature	-10°C~45°C
---------------------	------------

Beam Angle (Optional)	24°
-----------------------	-----

Fixture Dimmable	Non-dimmable
------------------	--------------

Electrical	Internal Driver
------------	-----------------

Protection class	IP20
------------------	------

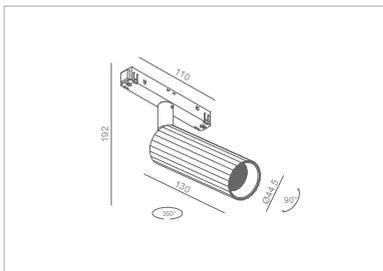

Especially designed for:

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.




Product Model No.	AP-DY-0070A-12W	
Packaging Detail	48.5×43.5×28.5cm	
	STD PKG	24pcs
	N.W	7.32kgs
	G.W	9.32kgs

AP-DY-0070A-12W

DC28-42VDC12W LED 3000K/ PRI:822lm220-240/  
incl.V~50/60 Hz 0.18A Driver SEC: Constant Current:  
DC300mA



Warm White 3000K ∠24°

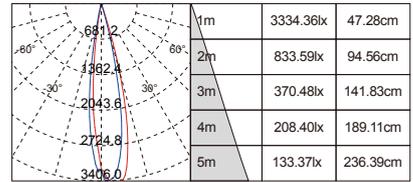

cd Height illuminance Diameter

Option colors



Various Brand of COB LED Light Source:




Product series

# AP-DY-0071A-12W



MAGNETIC LED  
TRACK LIGHT

TECHNICAL SPECIFICATIONS	
Input (Optional)	220-240V~50/60 Hz
Maximum Wattage	12W±10% Max
Number of LEDs	
1 LEDs COB	
Luminous Flux	
822LM (3000K)	
Main Material	
Aluminum & PC Lens Diffuser	
Color Temperature	
3000K / 4000K / 6500K	
CRI	≥90
Power Factor	≥0.8
Working Temperature	-10°C~45°C
Beam Angle (Optional)	24°
Fixture Dimmable	Non-dimmable
Electrical	Internal Driver
Protection class	IP20

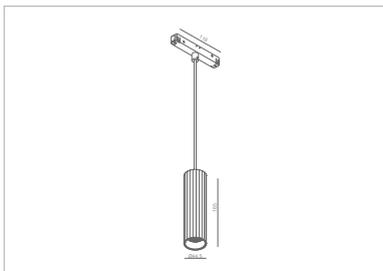

**Especially designed for:**  
Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.




Product Model No.	AP-DY-0071A-12W	
Packaging Detail	51.5×43×34.5cm	
	STD PKG	24pcs
	N.W	7.32kgs
	G.W	9.32kgs

**AP-DY-0071A-12W**  
DC28-42VDC12W LED 3000K/  
PRI:822lm220-240/ incl.V~50/60 Hz 0.18A  
Driver SEC: Constant Current: DC300mA



Warm White 3000K ∠24°

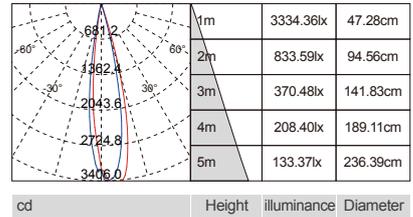

**Option colors**



Various Brand of COB LED Light Source:



Product series

**AP-DY-0080A-10W**



MAGNETIC LED  
TRACK LIGHT

TECHNICAL SPECIFICATIONS

Input (Optional)	48V~50/60 Hz
Maximum Wattage	10W±10% Max

Number of LEDs	1 LEDs COB
----------------	------------

Luminous Flux	680LM (3000K)
---------------	---------------

Main Material	Aluminum & PC
---------------	---------------

Color Temperature	3000K / 4000K / 6500K
-------------------	-----------------------

CRI	≥90
-----	-----

Power Factor	≥0.55
--------------	-------


Working Temperature	-10°C~45°C
---------------------	------------

Beam Angle (Adjustable)	15°-60°
-------------------------	---------

Fixture Dimmable	Non-dimmable
------------------	--------------

Electrical	Internal Driver
------------	-----------------

Protection class	IP20
------------------	------

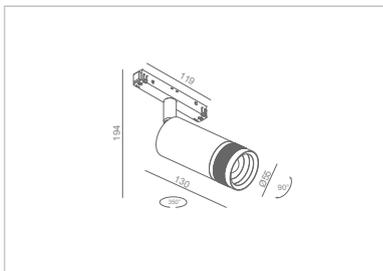

Especially designed for:

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.




Product Model No.	AP-DY-0080A-10W		
Packaging Detail	47×45.5×34.5cm		
	STD PKG	24pcs	
	N.W	9.12kgs	
	G.W	11.12kgs	

AP-DY-0080A-10W

10W LED 3000K 680lm / incl. MEGALUX Driver SEC: Constant Current: DC250mA/DC36VDC



Warm White 3000K 15°

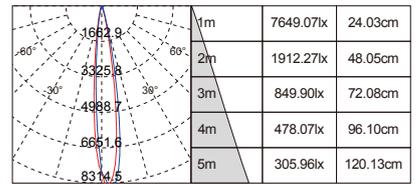

cd Height illuminance Diameter

Option colors



Various Brand of COB LED Light Source:



Product series


# AP-DY-0081A-10W



MAGNETIC LED  
TRACK LIGHT

TECHNICAL SPECIFICATIONS	
Input (Optional)	48V~50/60 Hz
Maximum Wattage	10W±10% Max
Number of LEDs	
1 LEDs COB	
Luminous Flux	
680LM (3000K)	
Main Material	
Aluminum & PC	
Color Temperature	
3000K / 4000K / 6500K	

CRI	≥90
Power Factor	≥0.55
Working Temperature	-10°C~45°C
Beam Angle (Adjustable)	15°-60°
Fixture Dimmable	Non-dimmable
Electrical	Internal Driver
Protection class	IP20

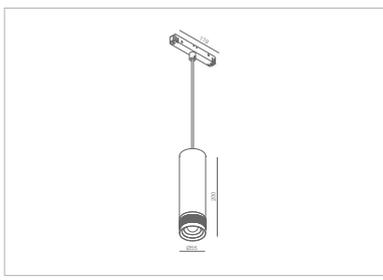

**Especially designed for:**  
Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.




Product Model No.	AP-DY-0081A-10W	
Packaging Detail	47×45.5×34.5cm	
	STD PKG	24pcs
	N.W	12.72kgs
	G.W	14.72kgs

**AP-DY-0081A-10W**

10W LED 3000K 680lm / incl. MEGALUX Driver SEC: Constant Current: DC250mA/DC36V



Warm White 3000K ∠15°

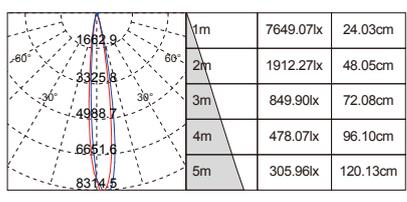

cd      Height      illuminance      Diameter

**Option colors**




Various Brand of COB LED Light Source:



Product series

**AP-DY-0090A-10W**



MAGNETIC LED  
LINEAR LIGHT

TECHNICAL SPECIFICATIONS

Input (Optional)	48V~50/60 Hz
Maximum Wattage	10W±10% Max

Number of LEDs	38 LEDs SMD
----------------	-------------

Luminous Flux	335LM (4000K)
---------------	---------------

Main Material	Aluminum & PMMA
---------------	-----------------

Color Temperature	3000K / 4000K / 6500K
-------------------	-----------------------

CRI	≥90
-----	-----


Working Temperature	-10°C~45°C
---------------------	------------

Beam Angle (Optional)	100°
-----------------------	------

Fixture Dimmable	Non-dimmable
------------------	--------------

Electrical	Internal Driver
------------	-----------------

Protection class	IP20
------------------	------

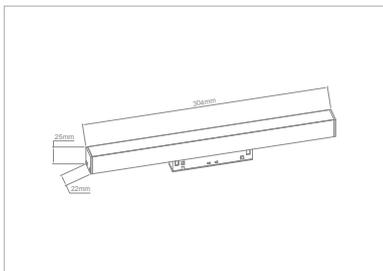


Product Model No.	AP-DY-0090A-10W	
Packaging Detail 	36×42.5×42cm	
	STD PKG	50pcs
	N.W	9kgs
	G.W	9.75kgs

**AP-DY-0090A-10W**

10W LED 4000K 335lm / incl. - Driver SEC: Constant Current: 48VDC



Warm White 4000K ∠100°

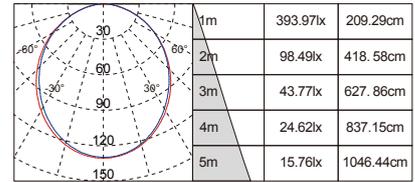

cd      Height      illuminance      Diameter

**Especially designed for:**

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.



Various Brand of SMD LED Light Source:



Product series

**AP-DY-0091A-20W**



MAGNETIC LED  
LINEAR LIGHT

TECHNICAL SPECIFICATIONS

Input (Optional)	48V~50/60 Hz
Maximum Wattage	20W±10% Max

Number of LEDs	75 LEDs SMD
----------------	-------------

Luminous Flux	629LM (4000K)
---------------	---------------

Main Material	Aluminum & PMMA
---------------	-----------------

Color Temperature	3000K / 4000K / 6500K
-------------------	-----------------------

CRI	≥90
-----	-----


Working Temperature	-10°C~45°C
---------------------	------------

Beam Angle (Optional)	100°
-----------------------	------

Fixture Dimmable	Non-dimmable
------------------	--------------

Electrical	Internal Driver
------------	-----------------

Protection class	IP20
------------------	------

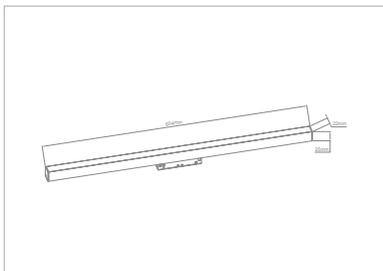


Product Model No.	AP-DY-0091A-20W	
Packaging Detail	66×43×42cm	
	STD PKG	50pcs
	N.W	17kgs
	G.W	18kgs

**AP-DY-0091A-20W**

20W LED 4000K 629lm / incl. - Driver SEC: Constant Current: 48VDC



Warm White 4000K ∠100°

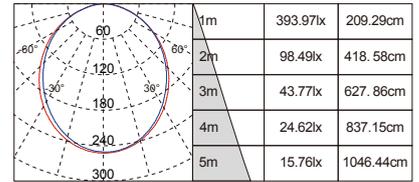

cd Height illuminance Diameter

**Especially designed for:**

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.



Various Brand of SMD LED Light Source:



Product series

**AP-DY-0100A-6W**



MAGNETIC LED  
LINEAR LIGHT

TECHNICAL SPECIFICATIONS

Input (Optional)	48V~50/60 Hz
Maximum Wattage	6W±10% Max

Number of LEDs	6 LEDs COB
----------------	------------

Luminous Flux	385LM (4000K)
---------------	---------------

Main Material	Aluminum & PC Lens Diffuser
---------------	-----------------------------

Color Temperature	3000K / 4000K / 6500K
-------------------	-----------------------


CRI	≥90
-----	-----

Working Temperature	-10°C~45°C
---------------------	------------

Beam Angle (Optional)	24°/36°
-----------------------	---------

Fixture Dimmable	Non-dimmable
------------------	--------------

Electrical	Internal Driver
Protection class	IP20

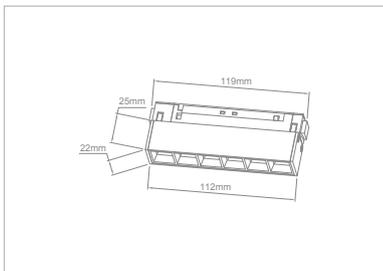

Especially designed for:

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.




Product Model No.	AP-DY-0100A-6W	
Packaging Detail	36×31.5×41cm	
	STD PKG	100pcs
	N.W	10kgs
	G.W	11kgs

AP-DY-0100A-6W

6W LED 4000K 385lm / incl. - Driver SEC: Constant Current: 48VDC



Warm White 4000K ∠24°

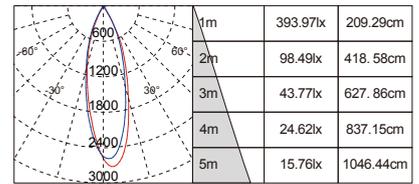

cd Height illuminance Diameter

Various Brand of COB LED Light Source:



Product series

**AP-DY-0101A-12W**



MAGNETIC LED  
LINEAR LIGHT

TECHNICAL SPECIFICATIONS

Input (Optional)	48V~50/60 Hz
Maximum Wattage	12W±10% Max

Number of LEDs	12 LEDs COB
----------------	-------------

Luminous Flux	845LM (4000K)
---------------	---------------

Main Material	Aluminum & PC Lens Diffuser
---------------	-----------------------------

Color Temperature	3000K / 4000K / 6500K
-------------------	-----------------------

CRI	≥90
-----	-----


Working Temperature	-10°C~45°C
---------------------	------------

Beam Angle (Optional)	24°/36°
-----------------------	---------

Fixture Dimmable	Non-dimmable
------------------	--------------

Electrical	Internal Driver
------------	-----------------

Protection class	IP20
------------------	------

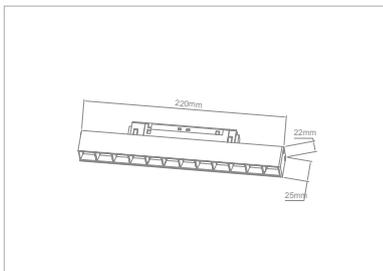


Product Model No.	AP-DY-0101A-12W	
Packaging Detail	37.5×28×42cm	
	STD PKG	50pcs
	N.W	8kgs
	G.W	9kgs

**AP-DY-0101A-12W**

12W LED 4000K 845lm / incl. - Driver SEC: Constant Current: 48VDC



Warm White 4000K ∠24°

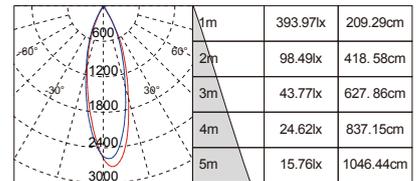

cd Height illuminance Diameter

**Especially designed for:**

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.



Various Brand of COB LED Light Source:



Product series

**AP-DY-0102A-18W**



MAGNETIC LED  
LINEAR LIGHT

TECHNICAL SPECIFICATIONS

Input (Optional)	48V~50/60 Hz
Maximum Wattage	18W±10% Max

Number of LEDs	18 LEDs COB
----------------	-------------

Luminous Flux	1175LM (4000K)
---------------	----------------

Main Material	Aluminum & PC Lens Diffuser
---------------	-----------------------------

Color Temperature	3000K / 4000K / 6500K
-------------------	-----------------------

CRI	≥90
-----	-----


Working Temperature	-10°C~45°C
---------------------	------------

Beam Angle (Optional)	24°/36°
-----------------------	---------

Fixture Dimmable	Non-dimmable
------------------	--------------

Electrical	Internal Driver
------------	-----------------

Protection class	IP20
------------------	------

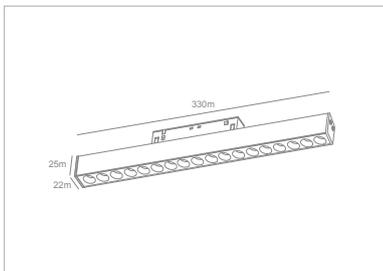


Product Model No.	AP-DY-0102A-18W	
Packaging Detail	37.5×28×42cm	
	STD PKG	20pcs
	N.W	8kgs
	G.W	9kgs

**AP-DY-0102A-18W**

18W LED 4000K 1175lm / incl. - Driver SEC: Constant Current: 48VDC



Warm White 4000K ∠24°

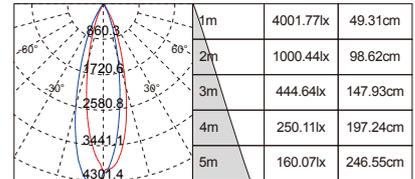

cd      Height      illuminance      Diameter

**Especially designed for:**

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.



Various Brand of COB LED Light Source:



Product series

**AP-DY-0111A-12W**



MAGNETIC LED  
TRACK LIGHT

TECHNICAL SPECIFICATIONS

Input (Optional)	48V~50/60 Hz
Maximum Wattage	12W±10% Max

Number of LEDs	1 LEDs COB
----------------	------------

Luminous Flux	500LM (3000K)
---------------	---------------

Main Material	Aluminum & PC Lens Diffuser
---------------	-----------------------------

Color Temperature	3000K / 4000K / 6500K
-------------------	-----------------------

CRI	≥90
-----	-----

Power Factor	≥0.8
--------------	------


Working Temperature	-10°C~45°C
---------------------	------------

Beam Angle (Optional)	15°/24°/36°
-----------------------	-------------

Fixture Dimmable	Non-dimmable
------------------	--------------

Electrical	Internal Driver
------------	-----------------

Protection class	IP20
------------------	------

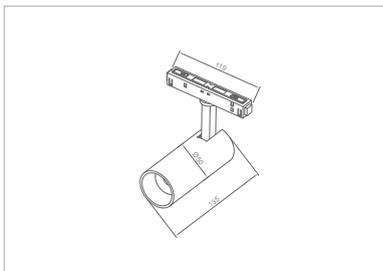


Product Model No.	AP-DY-0111A-12W	
Packaging Detail 	51.5×37.5×37.5cm	
	STD PKG	30pcs
	N.W	5.55kgs
	G.W	7.55kgs

AP-DY-0111A-12W

Integrated 48V DC input. Dimming Options:0- 10V,Dali,2.4G



Warm White 3000K ∠ 24°

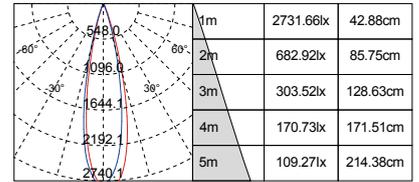

cd Height illuminance Diameter

Especially designed for:

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.



Various Brand of COB LED Light Source:



MAGNETIC LED  
TRACK LIGHT

TECHNICAL SPECIFICATIONS

Input (Optional)	48V~50/60 Hz
Maximum Wattage	16W±10% Max

Number of LEDs	1 LEDs COB
----------------	------------

Luminous Flux	675LM (4000K)
---------------	---------------

Main Material	Aluminum & PC Lens Diffuser
---------------	-----------------------------

Color Temperature	3000K / 4000K / 6500K
-------------------	-----------------------

CRI	≥90
-----	-----

Power Factor	≥0.92
--------------	-------


Working Temperature	-10°C~45°C
---------------------	------------

Beam Angle (Optional)	15°/24°/36°
-----------------------	-------------

Fixture Dimmable	Non-dimmable
------------------	--------------

Electrical	Internal Driver
------------	-----------------

Protection class	IP20
------------------	------

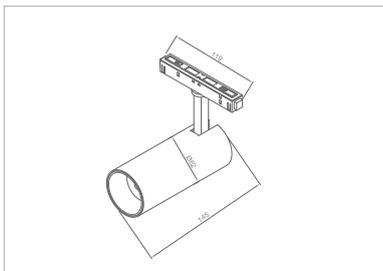

Especially designed for:


Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.




Product Model No.	AP-DY-0112A-16W	
Packaging Detail	51.5×42.5×43cm	
	STD PKG	30pcs
	N.W	8.16kgs
	G.W	10.16kgs

AP-DY-0112A-16W

Integrated 48V DC input. Dimming Options:0- 10V,Dali,2.4G



Warm White 4000K ∠ 24°

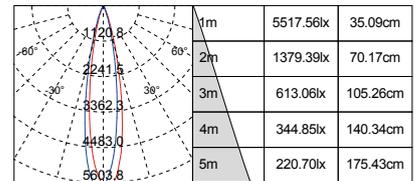

cd Height illuminance Diameter

Various Brand of COB LED Light Source:



Product series


**AP-DY-0130A-6W**



MAGNETIC LED  
LINEAR LIGHT

TECHNICAL SPECIFICATIONS	
Input (Optional)	48V~50/60 Hz
Maximum Wattage	6W±10% Max
Number of LEDs	
6 LEDs COB	
Luminous Flux	
402LM (3000K)	
Main Material	
Aluminum & PC Lens Diffuser	
Color Temperature	
3000K / 4000K / 6500K	

CRI	≥90
Working Temperature	-10°C~45°C
Beam Angle (Optional)	24°/36°
Fixture Dimmable	Non-dimmable
Electrical	Internal Driver
Protection class	IP20

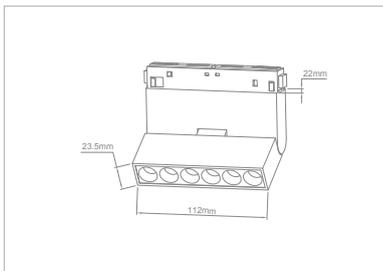

**Especially designed for:**  
Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.




Product Model No.	AP-DY-0130A-6W	
Packaging Detail	37.5×28×42cm	
	STD PKG	50pcs
	N.W	8kgs
	G.W	9kgs

## AP-DY-0130A-6W

6W LED 4000K 402lm / incl. - Driver SEC: Constant Current: 48VDC



Warm White 3000K ∠24°

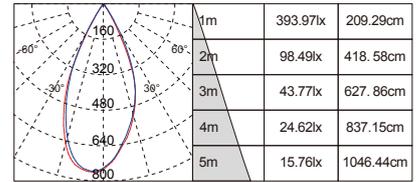

cd      Height      illuminance      Diameter

Various Brand of COB LED Light Source:



Product series

# AP-DY-0131A-12W



MAGNETIC LED  
LINEAR LIGHT

TECHNICAL SPECIFICATIONS

Input (Optional)	48V~50/60 Hz
Maximum Wattage	12W±10% Max

Number of LEDs	12 LEDs COB
----------------	-------------

Luminous Flux	731LM (3000K)
---------------	---------------

Main Material	Aluminum & PC Lens Diffuser
---------------	-----------------------------

Color Temperature	3000K / 4000K / 6500K
-------------------	-----------------------


CRI	≥90
-----	-----

Working Temperature	-10°C~45°C
---------------------	------------

Beam Angle (Optional)	24°/36°
-----------------------	---------

Fixture Dimmable	Non-dimmable
------------------	--------------

Electrical	Internal Driver
Protection class	IP20

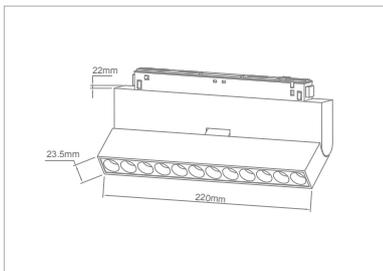

Especially designed for:

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.




Product Model No.	AP-DY-0131A-12W	
Packaging Detail	37.5×28×42cm	
	STD PKG	30pcs
	N.W	8.4kgs
	G.W	9.4kgs

AP-DY-0131A-12W

12W LED 4000K 731lm / incl. - Driver SEC: Constant Current: 48VDC



Warm White 3000K ∠24°

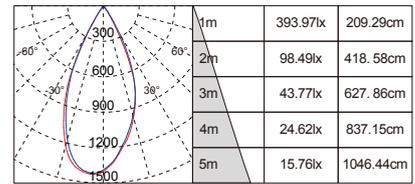

cd      Height      illuminance      Diameter

Various Brand of COB LED Light Source:



Product series

**AP-GD-0011A-7W**



LED TRACK  
LIGHT

TECHNICAL SPECIFICATIONS

Input (Optional)	220-240V~50/60 Hz
Maximum Wattage	7W±10% Max

Number of LEDs	1 LEDs COB
----------------	------------

Luminous Flux	476LM (3000K)
---------------	---------------

Main Material	Die-casting Aluminum & PC Lens Diffuser
---------------	---

Color Temperature	3000K / 4000K / 6500K
-------------------	-----------------------

CRI	≥90
-----	-----

Power Factor	≥0.8
--------------	------


Working Temperature	-10°C~45°C
---------------------	------------

Beam Angle (Optional)	45°
-----------------------	-----

Fixture Dimmable	Non-dimmable
------------------	--------------

Electrical	Internal Driver
------------	-----------------

Protection class	IP20
------------------	------

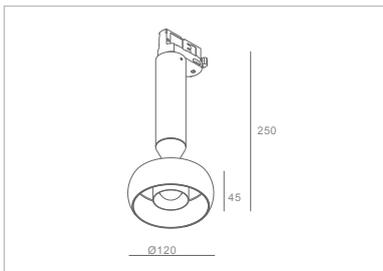

Especially designed for:

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.



Product Model No.	AP-GD-0010A-7W	
Packaging Detail	64x48.5x31.5cm	
	STD PKG	12pcs
	N.W	6.12kgs
	G.W	8.8kgs

AP-GD-0010A-7W


DC30-42VDC7W LED 3000K/

PRI:476lm220-240/ incl. -V~ 50/60 Hz 0.050A

Driver SEC: Constant Current: DC170mA



Warm White 3000K ∠45°

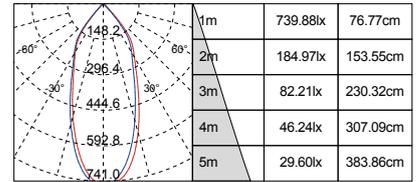

cd Height illuminance Diameter

Option colors



Various Brand of COB LED Light Source:



LED TRACK  
LIGHT

TECHNICAL SPECIFICATIONS

Input (Optional)	220-240V~50/60 Hz
Maximum Wattage	7W±10% Max

Number of LEDs	1 LEDs COB
----------------	------------

Luminous Flux	476LM (3000K)
---------------	---------------

Main Material	Die-casting Aluminum & PC Lens Diffuser
---------------	---

Color Temperature	3000K / 4000K / 6500K
-------------------	-----------------------

CRI	≥90
-----	-----

Power Factor	≥0.8
--------------	------


Working Temperature	-10°C~45°C
---------------------	------------

Beam Angle (Optional)	45°
-----------------------	-----

Fixture Dimmable	Non-dimmable
------------------	--------------

Electrical	Internal Driver
------------	-----------------

Protection class	IP20
------------------	------

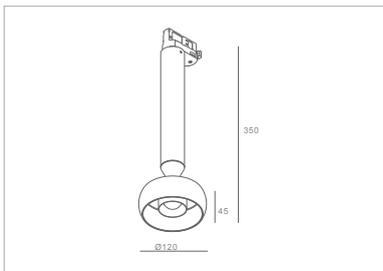

Especially designed for:

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.




Product Model No.	AP-GD-0011A-7W	
Packaging Detail	64x48.5x41.5cm	
	STD PKG	12pcs
	N.W	7.08kgs
	G.W	10.51kgs

AP-GD-0011A-7W

DC30-42VDC7W LED 3000K/ PRI:476lm220-240/ incl. -V~50/60 Hz 0.050A Driver SEC: Constant Current:DC170mA



Warm White 3000K ∠45°

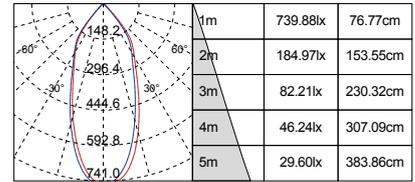

cd Height illuminance Diameter

Option colors



Various Brand of COB LED Light Source:



Product series

**AP-GD-0040A-7W**



LED TRACK  
LIGHT

TECHNICAL SPECIFICATIONS

Input (Optional)	220-240V~50/60 Hz
Maximum Wattage	7W±10% Max

Number of LEDs	1 LED COB
----------------	-----------

Luminous Flux	528LM (3000K)
---------------	---------------

Main Material	Die-casting Aluminum & PC Lens Diffuser
---------------	---

Color Temperature	3000K / 4000K / 6500K
-------------------	-----------------------

CRI	≥90
-----	-----

Power Factor	≥0.8
--------------	------


Working Temperature	-10°C~45°C
---------------------	------------

Beam Angle (Optional)	24°
-----------------------	-----

Fixture Dimmable	Non-dimmable
------------------	--------------

Electrical	Internal Driver
------------	-----------------

Protection class	IP20
------------------	------

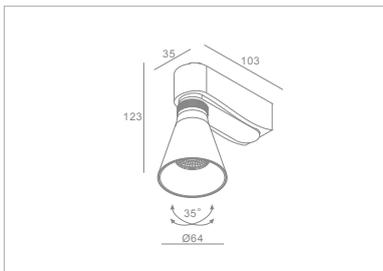

Especially designed for:

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.




Product Model No.	AP-GD-0040A-7W	
Packaging Detail	56x37.5x55.5cm	
	STD PKG	30pcs
	N.W	5.55kgs
	G.W	7.55kgs

AP-GD-0040A-7W

DC30-42VDC7W LED 3000K/  
 PRI:528lm220-240/ incl. -V~ 50/60 Hz 0.050A  
 Driver SEC: Constant Current: DC170mA



Warm White 3000K ∠ 24°

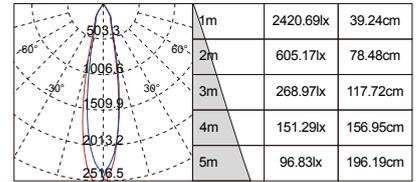

cd Height illuminance Diameter

Option colors



Various Brand of COB LED Light Source:



Product series

# AP-GD-0050A-12W



LED TRACK  
LIGHT

TECHNICAL SPECIFICATIONS

Input (Optional)	220-240V~50/60 Hz
Maximum Wattage	12W±10% Max

Number of LEDs	1 LEDs COB
----------------	------------

Luminous Flux	822LM (3000K)
---------------	---------------

Main Material	Die-casting Aluminum & PC Lens Diffuser
---------------	---

Color Temperature	3000K / 4000K / 6500K
-------------------	-----------------------

CRI	≥90
-----	-----

Power Factor	≥0.8
--------------	------


Working Temperature	-10°C~45°C
---------------------	------------

Beam Angle (Optional)	24°
-----------------------	-----

Fixture Dimmable	Non-dimmable
------------------	--------------

Electrical	Internal Driver
------------	-----------------

Protection class	IP20
------------------	------

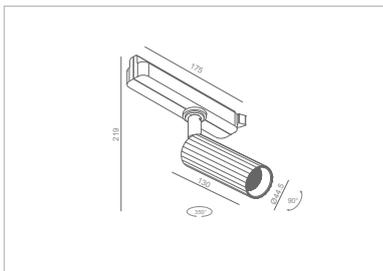

Especially designed for:

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.



Product Model No.	AP-GD-0050A-12W	
Packaging Detail	54×45.5×34.5cm	
	STD PKG	24pcs
	N.W	9.6kgs
	G.W	11.6kgs

AP-GD-0050A-12W


DC28-42VDC12W LED 3000K/

PRI:822lm220-240/ incl.V~50/60 Hz 0.18A

Driver SEC: Constant Current: DC300mA



Warm White 3000K ∠24°

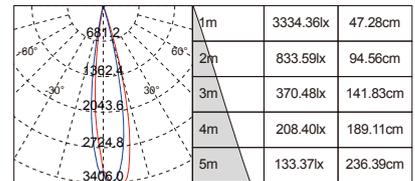

cd      Height      illuminance      Diameter

Option colors



Various Brand of COB LED Light Source:



Product series


# AP-S3-1051-25W



FOUR WIRE LED  
TRACK LIGHT

TECHNICAL SPECIFICATIONS	
<b>Input (Optional)</b>	220-240V~ 50/60 Hz
<b>Maximum Wattage</b>	25W±10% Max
<b>Number of LEDs</b>	1 LEDs COB
<b>Luminous Flux</b>	2379LM (3500K)
<b>Main Material</b>	Die-casting Aluminum & Glass Diffuser
<b>Color Temperature</b>	3500K / 4000K / 6500K

<b>CRI</b>	≥80
<b>Power Factor</b>	≥0.92
<b>Working Temperature</b>	-10°C~45°C
<b>Beam Angle (Adjustable)</b>	55°
<b>Fixture Dimmable</b>	Non-dimmable
<b>Electrical</b>	Osram Internal Driver
<b>Protection class</b>	IP20

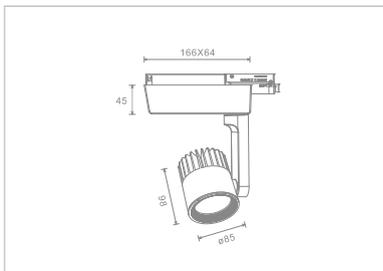

**Especially designed for:**

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.




<b>Product Model No.</b>	AP-S3-1051-25W	
<b>Packaging Detail</b>	50×43×31.5cm	
	STD PKG	12pcs
	N.W	9.6kgs
	G.W	11.5kgs

**AP-S3-1051-25W**

25W LED 3500K 2379lm / incl. OSRAM Driver SEC: Constant Current: DC750mA DC30-42VDC / PRI: 220-240 V~ 50/60 Hz 0.18A



Warm White 3500K ∠ 55°

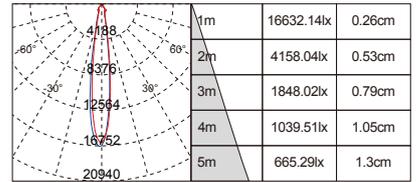

cd      Height      illuminance      Diameter

**Various Brand of COB LED Light Source:**



Product series

# AP-WG-0010A-30W



TWO WIRE LED  
TRACK LIGHT

TECHNICAL SPECIFICATIONS

Input (Optional)	220-240V~ 50/60 Hz
Maximum Wattage	30W±10% Max

Number of LEDs	1 LEDs COB
----------------	------------

Luminous Flux	1959LM (4000K)
---------------	----------------

Main Material	Die-casting Aluminum & Glass Diffuser
---------------	---------------------------------------

Color Temperature	3000K / 4000K / 6500K
-------------------	-----------------------

CRI	≥95
-----	-----

Power Factor	≥0.92
--------------	-------


Working Temperature	-10°C~45°C
---------------------	------------

Beam Angle (Adjustable)	36°
-------------------------	-----

Fixture Dimmable	Non-dimmable
------------------	--------------

Electrical	Internal Driver
------------	-----------------

Protection class	IP20
------------------	------

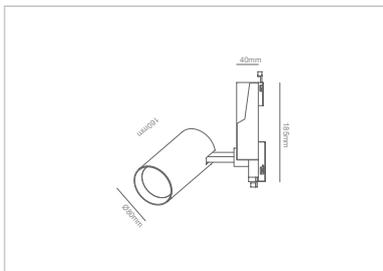


Product Model No.	AP-WG-0010A-30W		
Packaging Detail	43.5×36×26.5cm		
	STD PKG	12pcs	
	N.W	9.6kgs	
	G.W	11.5kgs	

AP-WG-0010A-30W

15WV~ 50/60LEDHz4000K0.180A1959lm / incl. - Driver SEC: Constant  
Current: PRI: 220-240



Warm White 4000K ∠ 36°

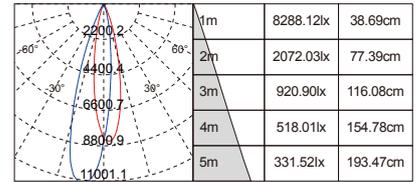

cd      Height      illuminance      Diameter

Especially designed for:

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.



Various Brand of COB LED Light Source:



Product series

# AP-202-15W



LED TRACK  
LIGHT

TECHNICAL SPECIFICATIONS

Input (Optional)	220-240V~ 50/60 Hz
Maximum Wattage	15W±10% Max

Number of LEDs	1 LEDs COB
----------------	------------

Luminous Flux	1320LM (4000K)
---------------	----------------

Main Material	Die-casting Aluminum & Glass Diffuser
---------------	---------------------------------------

Color Temperature	3000K / 4000K / 6500K
-------------------	-----------------------

CRI	≥80
-----	-----

Power Factor	≥0.5
--------------	------


Working Temperature	-10°C~45°C
---------------------	------------

Beam Angle (Adjustable)	25°
-------------------------	-----

Fixture Dimmable	Non-dimmable
------------------	--------------

Electrical	Internal Driver
------------	-----------------

Protection class	IP20
------------------	------

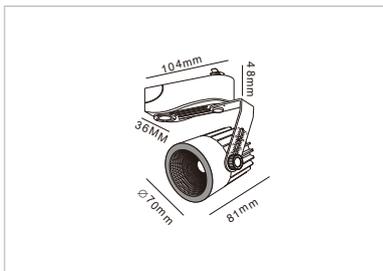

Especially designed for:

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.



Product Model No.	AP-202-15W	
Packaging Detail	42×26×33cm	
	STD PKG	20pcs
	N.W	6.3kgs
	G.W	7.8kgs


AP-202-15W

15WV~ 50/60LEDHz4000K0.12A1320lm / incl. - Driver SEC: Constant

Current: PRI: 220-240



Warm White 4000K ∠ 25°

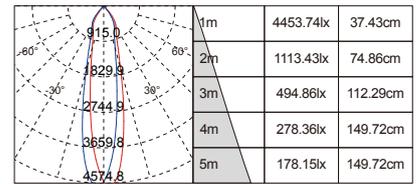

cd Height illuminance Diameter

Option colors



Various Brand of COB LED Light Source:





Simple and beautiful

# SPOTLIGHT

## WAFER Series

### LED SPOT LIGHT

Angle adjustable, color optional



# ART FOR A NEW HOME

SIMPLICITY



**NEW&HOT!**

## HERO Series

### LED SPOT LIGHT

Angle adjustable, color optional

Product series


# AP-KD-0010A-7W



RECESSED LED  
SPOT LIGHT

TECHNICAL SPECIFICATIONS

<b>Input (Optional)</b>	220-240V~50/60 Hz
<b>Maximum Wattage</b>	7W±10% Max
<b>Number of LEDs</b>	
1 LED COB	
<b>Luminous Flux</b>	
476LM (3000K)	
<b>Main Material</b>	
Aluminum & PC Lens Diffuser	
<b>Color Temperature</b>	
3000K / 4000K / 6500K	
<b>CRI</b>	≥90
<b>Power Factor</b>	≥0.8
<b>Working Temperature</b>	-10°C~45°C
<b>Beam Angle (Optional)</b>	45°
<b>Fixture Dimmable</b>	Non-dimmable
<b>Electrical</b>	- External Driver
<b>Protection class</b>	IP20

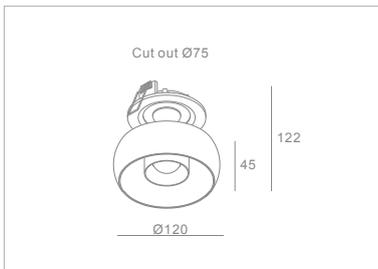

**Especially designed for:**

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.



<b>Product Model No.</b>	AP-KD-0010A-7W	
<b>Packaging Detail</b> 	39.5×26.5×30cm	
	STD PKG	12pcs
	N.W	5.28kgs
	G.W	6.2kgs


**AP-KD-0010A-7W**

DC30-42VDC7W LED 3000K/ PRI:476lm220-240/ incl. -V~ 50/60 Hz 0.050A

Driver SEC: Constant Current: DC170mA



Warm White 3000K ∠45°

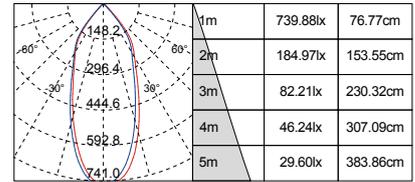

cd Height illuminance Diameter

**Option colors**



**Various Brand of COB LED Light Source:**



Product series


# AP-KD-0050A-7W



RECESSED LED  
SPOT LIGHT

TECHNICAL SPECIFICATIONS	
Input (Optional)	220-240V~50/60 Hz
Maximum Wattage	7W±10% Max
Number of LEDs	
1 LED COB	
Luminous Flux	
528LM (3000K)	
Main Material	
Aluminum & PC Lens Diffuser	
Color Temperature	
3000K / 4000K / 6500K	

CRI	≥90
Power Factor	≥0.8
Working Temperature	-10°C~45°C
Beam Angle (Optional)	24°
Fixture Dimmable	Non-dimmable
Electrical	- External Driver
Protection class	IP20

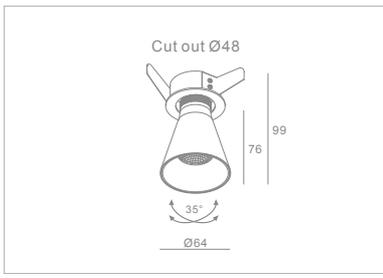

**Especially designed for:**  
Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.



Product Model No.	AP-KD-0050A-7W	
Packaging Detail	55×51.5×38cm	
	STD PKG	30pcs
	N.W	6.72kgs
	G.W	9.72kgs


**AP-KD-0050A-7W**

DC30-42VDC7W LED 3000K/ PRI:528lm220-240/ incl. -V~ 50/60 Hz 0.050A

Driver SEC: Constant Current: DC170mA



Warm White 3000K ∠24°

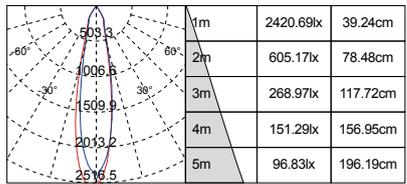

cd      Height      illuminance      Diameter

**Option colors**



Various Brand of COB LED Light Source:



Product series

**AP-KD-0060A-7W**



RECESSED LED  
SPOT LIGHT

TECHNICAL SPECIFICATIONS

Input (Optional)	220-240V~50/60 Hz
Maximum Wattage	7W±10% Max

Number of LEDs	1 LED COB
----------------	-----------

Luminous Flux	476LM (3000K)
---------------	---------------

Main Material	Aluminum & PC Lens Diffuser
---------------	-----------------------------

Color Temperature	3000K / 4000K / 6500K
-------------------	-----------------------

CRI	≥90
-----	-----

Power Factor	≥0.8
--------------	------


Working Temperature	-10°C~45°C
---------------------	------------

Beam Angle (Optional)	24°
-----------------------	-----

Fixture Dimmable	Non-dimmable
------------------	--------------

Electrical	- External Driver
------------	-------------------

Protection class	IP20
------------------	------

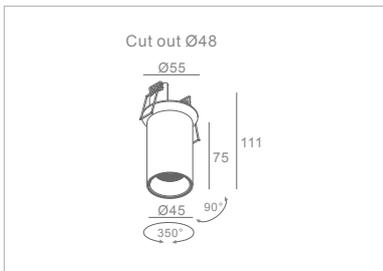

Especially designed for:

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.




Product Model No.	AP-KD-0060A-7W	
Packaging Detail 	34×25.5×28cm	
	STD PKG	32pcs
	N.W	11.65kgs
	G.W	13.6kgs

AP-KD-0060A-7W

DC30-42VDC7W LED 3000K/ PRI:476lm220-240/ incl. -V~ 50/60 Hz 0.050A  
Driver SEC: Constant Current: DC170mA



Warm White 3000K ∠ 24°

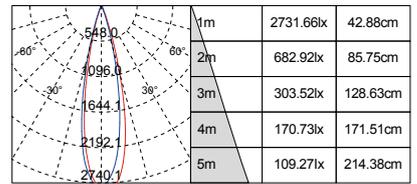

cd Height illuminance Diameter

Option colors




Various Brand of COB LED Light Source:



RECESSED LED  
SPOT LIGHT

TECHNICAL SPECIFICATIONS

<b>Input (Optional)</b>	220-240V~50/60 Hz
<b>Maximum Wattage</b>	15W±10% Max
<b>Number of LEDs</b>	
1 LED COB	
<b>Luminous Flux</b>	
867LM (3000K)	
<b>Main Material</b>	
Aluminum & PC Lens Diffuser	
<b>Color Temperature</b>	
3000K / 4000K / 6500K	
<b>CRI</b>	≥90
<b>Power Factor</b>	≥0.92
<b>Working Temperature</b>	-10°C~45°C
<b>Beam Angle (Optional)</b>	24°
<b>Fixture Dimmable</b>	Non-dimmable
<b>Electrical</b>	- External Driver
<b>Protection class</b>	IP20

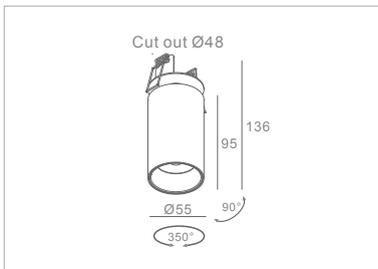

**Especially designed for:**

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.



<b>Product Model No.</b>	AP-KD-0061A-15W	
<b>Packaging Detail</b>	31×29×28.5cm	
	STD PKG	24pcs
	N.W	7.86kgs
	G.W	9.86kgs


**AP-KD-0061A-15W**

DC360mA/450mA15W LED 3000K 867lmDC30-42VDC/ incl.

-/ PRI: 220-240 V~ 50/60 Hz 0.088A



Warm White 3000K ∠ 24°

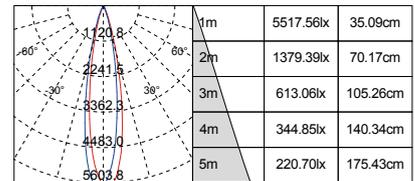

cd      Height      illuminance      Diameter

**Option colors**



**Various Brand of COB LED Light Source:**



Product series

AP-KD-0080A-15W



LED CANDLE  
LIGHT

TECHNICAL SPECIFICATIONS

Input (Optional)	220-240V~50/60 Hz
Maximum Wattage	15W±10% Max

Number of LEDs	1 LEDs COB
----------------	------------

Luminous Flux	1275LM (3000K)
---------------	----------------

Main Material	Iron & PMMA
---------------	-------------

Color Temperature	3000K / 4000K / 6500K
-------------------	-----------------------

CRI	≥90
-----	-----

Power Factor	≥0.92
--------------	-------


Working Temperature	-10°C~45°C
---------------------	------------

Beam Angle (Optional)	65°
-----------------------	-----

Fixture Dimmable	Non-dimmable
------------------	--------------

Electrical	External Driver
------------	-----------------

Protection class	IP44
------------------	------

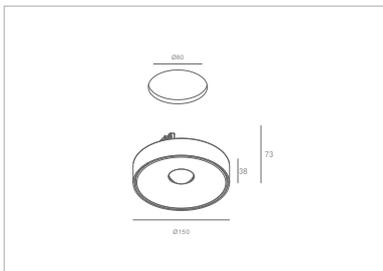


Product Model No.	AP-KD-0080A-15W	
Packaging Detail	56×38×39.5cm	
	STD PKG	18pcs
	N.W	11.88kgs
	G.W	13.88kgs

AP-KD-0080A-15W

DC30-42VDC15W LED 3000K/ PR:1275lm220-240/ incl.V~50/60 Hz 0.088A



Warm White 3000K ∠65°

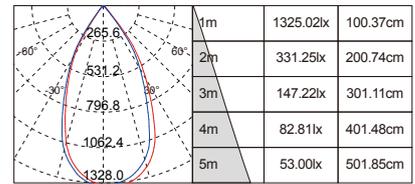

cd Height illuminance Diameter

Especially designed for:

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.



Various Brand of COB LED Light Source:



LED CANDLE  
LIGHT

TECHNICAL SPECIFICATIONS

Input (Optional)	220-240V~50/60 Hz
Maximum Wattage	24W±10% Max

Number of LEDs	1 LEDs COB
----------------	------------

Luminous Flux	2040LM (3000K)
---------------	----------------

Main Material	Iron & PMMA
---------------	-------------

Color Temperature	3000K / 4000K / 6500K
-------------------	-----------------------

CRI	≥90
-----	-----

Power Factor	≥0.92
--------------	-------


Working Temperature	-10°C~45°C
---------------------	------------

Beam Angle (Optional)	65°
-----------------------	-----

Fixture Dimmable	Non-dimmable
------------------	--------------

Electrical	External Driver
------------	-----------------

Protection class	IP44
------------------	------

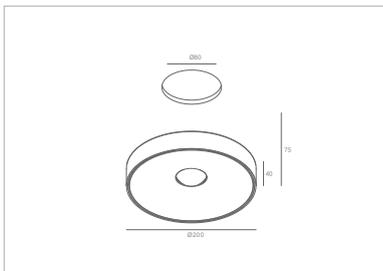


Product Model No.	AP-KD-0081A-24W	
Packaging Detail	48×48×39.5cm	
	STD PKG	12pcs
	N.W	11.52kgs
	G.W	13.52kgs

AP-KD-0081A-24W

DC27-40VDC30W LED 3000K/ PRI:2040lm220-240/ incl.V~50/60 Hz 0.135A  
Driver SEC: Constant Current: DC600mA



Warm White 3000K ∠65°

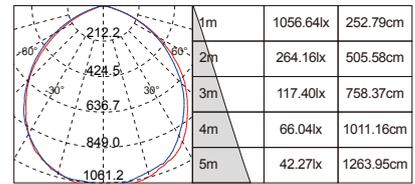

cd Height illuminance Diameter

Especially designed for:

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.



Various Brand of COB LED Light Source:



LED CANDLE  
LIGHT

TECHNICAL SPECIFICATIONS

Input (Optional)	220-240V~50/60 Hz
Maximum Wattage	30W±10% Max

Number of LEDs	1 LEDs COB
----------------	------------

Luminous Flux	2550LM (3000K)
---------------	----------------

Main Material	Iron & PMMA
---------------	-------------

Color Temperature	3000K / 4000K / 6500K
-------------------	-----------------------

CRI	≥90
-----	-----

Power Factor	≥0.92
--------------	-------


Working Temperature	-10°C~45°C
---------------------	------------

Beam Angle (Optional)	65°
-----------------------	-----

Fixture Dimmable	Non-dimmable
------------------	--------------

Electrical	External Driver
------------	-----------------

Protection class	IP44
------------------	------

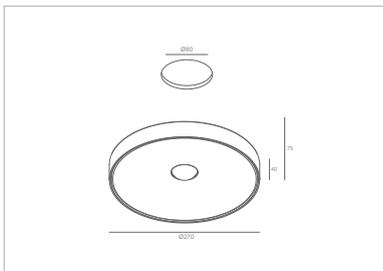

Product Model No.	AP-KD-0082A-30W	
Packaging Detail	62×62×28cm	
	STD PKG	8pcs
	N.W	11.12kgs
	G.W	13.12kgs

AP-KD-0082A-30W


DC30-42VDC30W LED 3000K/

PRI:2550lm220-240/ incl.V~-50/60 Hz 0.170A

Driver SEC: Constant Current: DC750mA



Warm White 3000K ∠65°

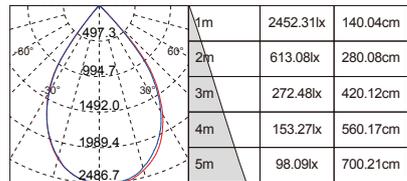

cd Height illuminance Diameter

Especially designed for:

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.



Various Brand of COB LED Light Source:



Product series

**AP-KD-0090A-8W**



LED CANDLE  
LIGHT

TECHNICAL SPECIFICATIONS

Input (Optional)	220-240V~50/60 Hz
Maximum Wattage	8W±10% Max

Number of LEDs	1 LEDs COB
----------------	------------

Luminous Flux	610LM (3000K)
---------------	---------------

Main Material	Aluminum & PC Lens Diffuser
---------------	-----------------------------

Color Temperature	3000K / 4000K / 6500K
-------------------	-----------------------

CRI	≥90
-----	-----

Power Factor	≥0.55
--------------	-------


Working Temperature	-10°C~45°C
---------------------	------------

Beam Angle (Optional)	45°
-----------------------	-----

Fixture Dimmable	Non-dimmable
------------------	--------------

Electrical	External Driver
------------	-----------------

Protection class	IP54
------------------	------

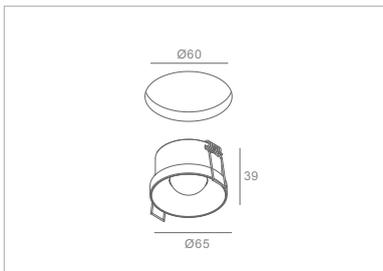

Especially designed for:

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.



Product Model No.	AP-KD-0090A-8W	
Packaging Detail	34×34×28cm	
	STD PKG	48pcs
	N.W	10.08kgs
	G.W	12.08kgs


AP-KD-0090A-8W

DC200mA8W LED 3000KDC28-42VDC610lm / incl./ PRI:-220-240 V~ 50/60 Hz 0.12A

ELECTRONIC Driver SEC: Constant Current:



Warm White 3000K ∠ 45°

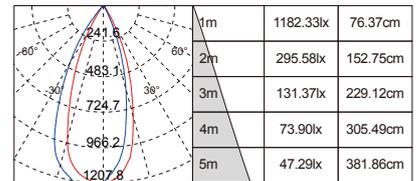

cd Height illuminance Diameter

Option colors



Various Brand of COB LED Light Source:



LED CANDLE  
LIGHT

TECHNICAL SPECIFICATIONS

Input (Optional)	220-240V~50/60 Hz
Maximum Wattage	12W±10% Max

Number of LEDs	1 LEDs COB
----------------	------------

Luminous Flux	939LM (3000K)
---------------	---------------

Main Material	Aluminum & PC Lens Diffuser
---------------	-----------------------------

Color Temperature	3000K / 4000K / 6500K
-------------------	-----------------------

CRI	≥90
-----	-----

Power Factor	≥0.55
--------------	-------


Working Temperature	-10°C~45°C
---------------------	------------

Beam Angle (Optional)	45°
-----------------------	-----

Fixture Dimmable	Non-dimmable
------------------	--------------

Electrical	External Driver
------------	-----------------

Protection class	IP54
------------------	------

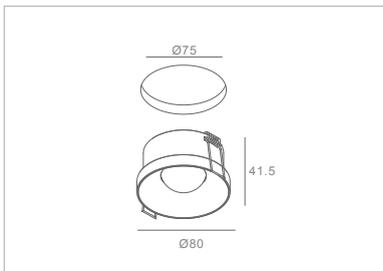


Product Model No.	AP-KD-0091A-12W	
Packaging Detail	30.5×30.5×36.5cm	
	STD PKG	36pcs
	N.W	7.2kgs
	G.W	9.2kgs

AP-KD-0091A-12W

12WDC300mALED 3000KDC28-42VDC939lm / /incl.PRI:-  
ELECTRONIC220-240 V~ 50/60DriverHz SEC:0.18A  
Constant Current



Warm White 3000K ∠ 45°

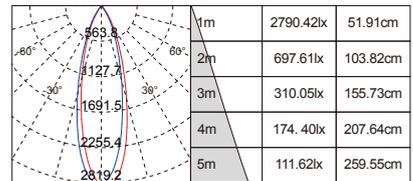

cd Height illuminance Diameter

Option colors



Especially designed for:

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.



Various Brand of COB LED Light Source:



LED CANDLE  
LIGHT

TECHNICAL SPECIFICATIONS

Input (Optional)	220-240V~50/60 Hz
Maximum Wattage	16W±10% Max

Number of LEDs	1 LEDs COB
----------------	------------

Luminous Flux	1387LM (3000K)
---------------	----------------

Main Material	Aluminum & PC Lens Diffuser
---------------	-----------------------------

Color Temperature	3000K / 4000K / 6500K
-------------------	-----------------------

CRI	≥90
-----	-----

Power Factor	≥0.55
--------------	-------


Working Temperature	-10°C~45°C
---------------------	------------

Beam Angle (Optional)	45°
-----------------------	-----

Fixture Dimmable	Non-dimmable
------------------	--------------

Electrical	External Driver
------------	-----------------

Protection class	IP54
------------------	------

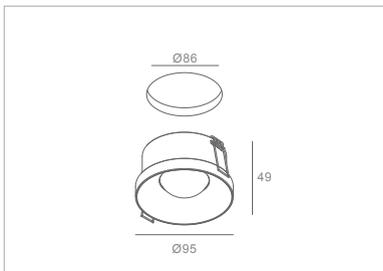

Especially designed for:

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.



Product Model No.	AP-KD-0092A-16W	
Packaging Detail	38×38×30.5cm	
	STD PKG	27pcs
	N.W	8.56kgs
	G.W	10.56kgs

AP-KD-0092A-16W

DC400mA16W LED 3000KDC28-40VDC1387lm //PRI:incl. 220-240V~ 50/60 Hz 0.23A

ELECTRONIC Driver SEC: Constant Current:



Warm White 3000K ∠ 45°

	1m	1641.02lx	121.60cm
	2m	410.26lx	243.20cm
	3m	182.34lx	364.81cm
	4m	102.56lx	486.41cm
	5m	65.64lx	608.01cm
cd	Height	illuminance	Diameter

Option colors



Various Brand of COB LED Light Source:



Product series


**AP-KD-0093A-8W**



LED CANDLE  
LIGHT

TECHNICAL SPECIFICATIONS

<b>Input (Optional)</b>	220-240V~50/60 Hz
<b>Maximum Wattage</b>	8W±10% Max
<b>Number of LEDs</b>	
1 LEDs COB	
<b>Luminous Flux</b>	
610LM (3000K)	
<b>Main Material</b>	
Aluminum & PC Lens Diffuser	
<b>Color Temperature</b>	
3000K / 4000K / 6500K	
<b>CRI</b>	≥90
<b>Power Factor</b>	≥0.55
<b>Working Temperature</b>	-10°C~45°C
<b>Beam Angle (Optional)</b>	45°
<b>Fixture Dimmable</b>	Non-dimmable
<b>Electrical</b>	External Driver
<b>Protection class</b>	IP54

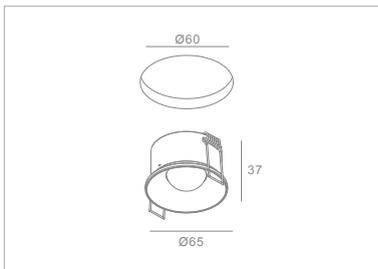

**Especially designed for:**

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.



<b>Product Model No.</b>	AP-KD-0093A-8W	
<b>Packaging Detail</b> 	34×34×28cm	
	STD PKG	48pcs
	N.W	12kgs
	G.W	14kgs

**AP-KD-0093A-8W**

DC200mA8W LED 3000KDC28-42VDC610lm / incl./

PRI:-220-240 V~ 50/60 Hz 0.12  
ELECTRONIC Driver SEC: Constant Current:



Warm White 3000K ∠ 45°

	1m	1182.33lx	76.37cm
	2m	295.58lx	152.75cm
	3m	131.37lx	229.12cm
	4m	73.90lx	305.49cm
	5m	47.29lx	381.86cm
cd	Height	illuminance	Diameter

**Option colors**



**Various Brand of COB LED Light Source:**



LED CANDLE  
LIGHT

TECHNICAL SPECIFICATIONS

Input (Optional)	220-240V~50/60 Hz
Maximum Wattage	12W±10% Max

Number of LEDs	1 LEDs COB
----------------	------------

Luminous Flux	939LM (3000K)
---------------	---------------

Main Material	Aluminum & PC Lens Diffuser
---------------	-----------------------------

Color Temperature	3000K / 4000K / 6500K
-------------------	-----------------------

CRI	≥90
-----	-----

Power Factor	≥0.55
--------------	-------


Working Temperature	-10°C~45°C
---------------------	------------

Beam Angle (Optional)	45°
-----------------------	-----

Fixture Dimmable	Non-dimmable
------------------	--------------

Electrical	External Driver
------------	-----------------

Protection class	IP54
------------------	------

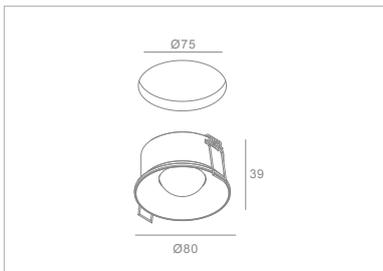

Product Model No.	AP-KD-0094A-12W	
Packaging Detail	30.5×30.5×36.5cm	
	STD PKG	36pcs
	N.W	14.76kgs
	G.W	16.76kgs

AP-KD-0094A-12W

12WDC300mALED 3000KDC28-42VDC939lm / /incl.PRI:-  
ELECTRONIC220-240 V~ 50/60DriverHz SEC:0.18AC  
onstant Current:



Warm White 3000K ∠45°

	1m	2790.42lx	51.91cm
	2m	697.61lx	103.82cm
	3m	310.05lx	155.73cm
	4m	174.40lx	207.64cm
	5m	111.62lx	259.55cm
	cd	Height	illuminance

Option colors



Especially designed for:

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.



Various Brand of COB LED Light Source:



LED CANDLE  
LIGHT

TECHNICAL SPECIFICATIONS

Input (Optional)	220-240V~50/60 Hz
Maximum Wattage	16W±10% Max

Number of LEDs	1 LEDs COB
----------------	------------

Luminous Flux	1387LM (3000K)
---------------	----------------

Main Material	Aluminum & PC Lens Diffuser
---------------	-----------------------------

Color Temperature	3000K / 4000K / 6500K
-------------------	-----------------------

CRI	≥90
-----	-----

Power Factor	≥0.55
--------------	-------


Working Temperature	-10°C~45°C
---------------------	------------

Beam Angle (Optional)	45°
-----------------------	-----

Fixture Dimmable	Non-dimmable
------------------	--------------

Electrical	External Driver
------------	-----------------

Protection class	IP54
------------------	------

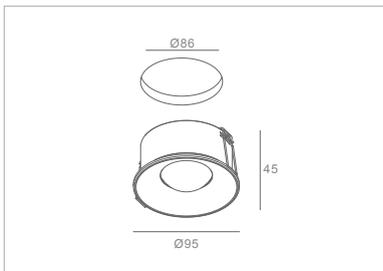

Especially designed for:

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.



Product Model No.	AP-KD-0095A-16W	
Packaging Detail	38×38×30.5cm	
	STD PKG	27pcs
	N.W	8.56kgs
	G.W	10.56kgs


AP-KD-0095A-16W

DC400mA16W LED 3000KDC28-40VDC1387lm //PRI:incl. 220-240-V~ 50/60 Hz 0.23A

ELECTRONIC Driver SEC: Constant Current:



Warm White 3000K ∠ 45°

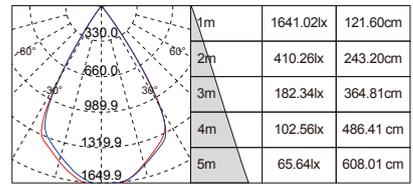

cd Height illuminance Diameter

Option colors



Various Brand of COB LED Light Source:



Product series

**AP-KD-0101A-6W**



RECESSED LED  
SPOT LIGHT

TECHNICAL SPECIFICATIONS

Input (Optional)	220-240V~50/60 Hz
Maximum Wattage	6W±10% Max

Number of LEDs	1 LEDs COB
----------------	------------

Luminous Flux	600LM (3000K)
---------------	---------------

Main Material	Aluminum & Frosted Plastic Diffuser
---------------	-------------------------------------

Color Temperature	3000K / 4000K / 6500K
-------------------	-----------------------

CRI	≥90
-----	-----

Power Factor	≥0.92
--------------	-------


Working Temperature	-10°C~45°C
---------------------	------------

Beam Angle (Optional)	13°
-----------------------	-----

Fixture Dimmable	Non-dimmable
------------------	--------------

Electrical	External Driver
------------	-----------------

Protection class	IP20
------------------	------

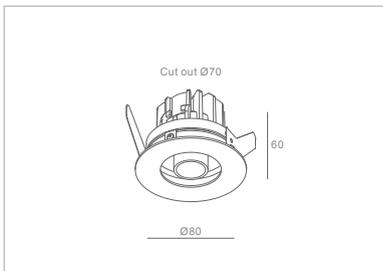

**Especially designed for:**

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.



Product Model No.	AP-KD-0101A-6W	
Packaging Detail 	52×41.2×40cm	
	STD PKG	80pcs
	N.W	15.9kgs
	G.W	17.4kgs

**AP-KD-0101A-6W**


DC2000mA6W CREE LED(COB)DC2.5-5VDC3000K/

PRI:600lm220-240/ incl.V~50/60 Hz 0.1A

Driver SEC: Constant Current:



Warm White 3000K ∠ 13°

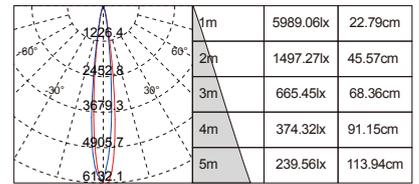

cd      Height      illuminance      Diameter

**Option colors**



**Various Brand of COB LED Light Source:**



Product series

**AP-KD-0102A-6W**



RECESSED LED  
SPOT LIGHT

TECHNICAL SPECIFICATIONS

Input (Optional)	220-240V~50/60 Hz
Maximum Wattage	6W±10% Max

Number of LEDs	1 LEDs COB
----------------	------------

Luminous Flux	600LM (3000K)
---------------	---------------

Main Material	Aluminum & PC Lens Diffuser
---------------	-----------------------------

Color Temperature	3000K / 4000K / 6500K
-------------------	-----------------------

CRI	≥90
-----	-----

Power Factor	≥0.92
--------------	-------


Working Temperature	-10°C~45°C
---------------------	------------

Beam Angle (Optional)	13°
-----------------------	-----

Fixture Dimmable	Non-dimmable
------------------	--------------

Electrical	External Driver
------------	-----------------

Protection class	IP20
------------------	------

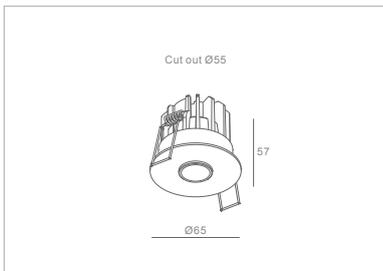

**Especially designed for:**

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.



Product Model No.	AP-KD-0102A-6W	
Packaging Detail 	52×41.2×40cm	
	STD PKG	80pcs
	N.W	15.9kgs
	G.W	17.4kgs

**AP-KD-0102A-6W**


DC2000mA6W CREE LED(COB)DC2.5-5VDC3000K/

PRI:600lm220-240/ incl.V~50/60 Hz 0.1A

Driver SEC: Constant Current:



Warm White 3000K ∠ 13°

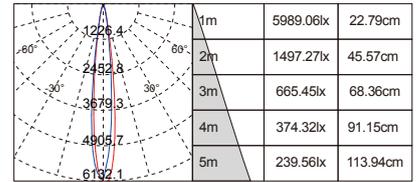

cd      Height      illuminance      Diameter

**Option colors**



**Various Brand of COB LED Light Source:**



Product series

**AP-KD-0100A-6W**



RECESSED LED  
SPOT LIGHT

TECHNICAL SPECIFICATIONS

Input (Optional)	220-240V~50/60 Hz
Maximum Wattage	6W±10% Max

Number of LEDs	1 LEDs COB
----------------	------------

Luminous Flux	600LM (3000K)
---------------	---------------

Main Material	Aluminum & Frosted Plastic Diffuser
---------------	-------------------------------------

Color Temperature	3000K / 4000K / 6500K
-------------------	-----------------------

CRI	≥90
-----	-----


Power Factor	≥0.92
--------------	-------

Working Temperature	-10°C~45°C
---------------------	------------

Beam Angle (Optional)	16°
-----------------------	-----

Fixture Dimmable	Non-dimmable
------------------	--------------

Electrical	External Driver
Protection class	IP20

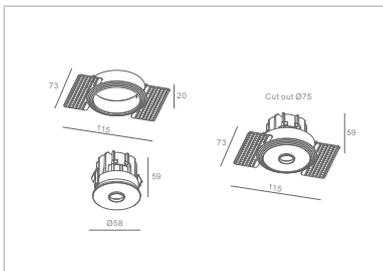

**Especially designed for:**

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.



Product Model No.	AP-KD-0100A-6W	
Packaging Detail 	52×41.2×40cm	
	STD PKG	80pcs
	N.W	15.9kgs
	G.W	17.4kgs

**AP-KD-0100A-6W**

DC2000mA6W CREE LED(COB)DC2.5-5VDC3000K/  
PRI:600lm220-240/ incl.V~50/60 Hz 0.1A  
Driver SEC: Constant Current:



Warm White 3000K ∠ 16°

	1m	3635.05lx	28.64cm
	2m	908.76lx	57.28cm
	3m	403.89lx	85.93cm
	4m	227.19lx	114.57cm
	5m	145.40lx	143.21cm
cd	Height	illuminance	Diameter

**Option colors**



**Various Brand of COB LED Light Source:**



Product series

# AP-KD-0110A-12W



RECESSED LED  
SPOT LIGHT

TECHNICAL SPECIFICATIONS

Input (Optional)	220-240V~50/60 Hz
Maximum Wattage	12W±10% Max

Number of LEDs	1 LEDs COB
----------------	------------

Luminous Flux	822LM (3000K)
---------------	---------------

Main Material	Aluminum & PC Lens Diffuser
---------------	-----------------------------

Color Temperature	3000K / 4000K / 6500K
-------------------	-----------------------

CRI	≥90
-----	-----

Power Factor	≥0.8
--------------	------


Working Temperature	-10°C~45°C
---------------------	------------

Beam Angle (Optional)	24°
-----------------------	-----

Fixture Dimmable	Non-dimmable
------------------	--------------

Electrical	External Driver
------------	-----------------

Protection class	IP20
------------------	------

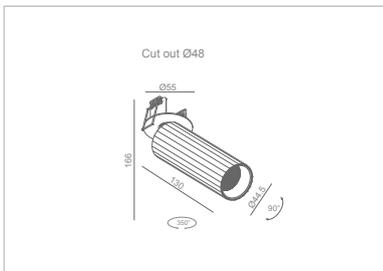

**Especially designed for:**

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.



Product Model No.	AP-KD-0110A-12W	
Packaging Detail	44×41×34.5cm	
	STD PKG	24pcs
	N.W	7.32kgs
	G.W	9.32kgs

**AP-KD-0110A-12W**


DC30-50VDC12W LED 3000K/

PRI:822lm220-240/ incl.V~50/60 Hz 0.88A

Driver SEC: Constant Current: DC300mA



Warm White 3000K ∠24°

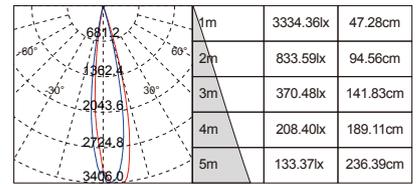

cd Height illuminance Diameter

**Option colors**



**Various Brand of COB LED Light Source:**



Product series


# AP-KD-0120A-10W



RECESSED LED  
SPOT LIGHT

TECHNICAL SPECIFICATIONS

<b>Input (Optional)</b>	220-240V~50/60 Hz
<b>Maximum Wattage</b>	10W±10% Max
<b>Number of LEDs</b>	1 LEDs COB
<b>Luminous Flux</b>	680LM (3000K)
<b>Main Material</b>	Aluminum & PC
<b>Color Temperature</b>	3000K / 4000K / 6500K
<b>CRI</b>	≥90
<b>Power Factor</b>	≥0.55
<b>Working Temperature</b>	-10°C~45°C
<b>Zoom Angle:</b>	15°-60°
<b>Fixture Dimmable</b>	Non-dimmable
<b>Electrical</b>	External Driver
<b>Protection class</b>	IP20

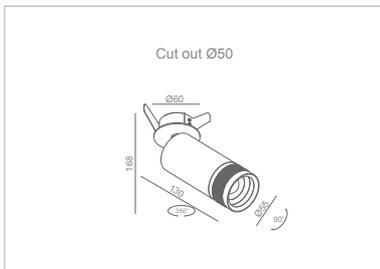

**Especially designed for:**

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.



<b>Product Model No.</b>	AP-KD-0120A-10W		
<b>Packaging Detail</b>	44×41×34.5cm		
	<b>STD PKG</b>	24pcs	
	<b>N.W</b>	10.73kgs	
	<b>G.W</b>	13.52kgs	

**AP-KD-0120A-10W**


DC28-42VDC10W LED 3000K/

PRI:680lm220-240/ incl.V~50/60 Hz 0.15A

Driver SEC: Constant Current: DC250mA



Warm White 3000K ∠15°

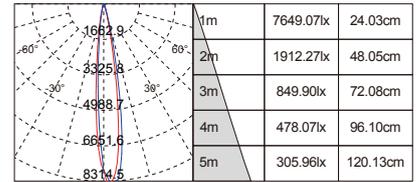

cd Height illuminance Diameter

**Option colors**



**Various Brand of COB LED Light Source:**



Product series


**AP-KD-0130A-5W**



RECESSED LED  
SPOT LIGHT

TECHNICAL SPECIFICATIONS	
Input (Optional)	220-240V~50/60 Hz
Maximum Wattage	5W±10% Max
Number of LEDs	
1 LEDs COB	
Luminous Flux	
229LM (3000K)	
Main Material	
Aluminum & Glass	
Color Temperature	
3000K / 4000K / 6500K	

CRI	≥90
Power Factor	≥0.55
Working Temperature	-10°C~45°C
Beam Angle (Optional)	110°
Fixture Dimmable	Non-dimmable
Electrical	External Driver
Protection class	IP20

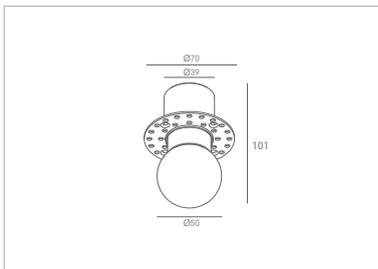

**Especially designed for:**

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.




Product Model No.	AP-KD-0130A-5W	
Packaging Detail	35×35×46.5cm	
	STD PKG	36pcs
	N.W	9.9kgs
	G.W	13.8kgs

## AP-KD-0130A-5W

5WDC150mALED 3000KDC8.5-40VDC229lm / incl./ PRI:- ELECTRONIC220-240 V~50/60DriverHzSEC:0.11AConstant Current:



Warm White 3000K ∠110°

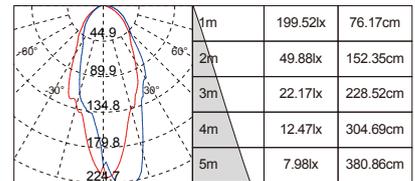

cd Height illuminance Diameter

Various Brand of COB LED Light Source:



Product series

# AP-SPT551-7W



RECESSED LED  
SPOT LIGHT

TECHNICAL SPECIFICATIONS

Input (Optional)	220-240V~50/60 Hz
Maximum Wattage	7W±10% Max

Number of LEDs	1 LEDs COB
----------------	------------

Luminous Flux	550LM (3000K)
---------------	---------------

Main Material	Die-casting Aluminum
---------------	----------------------

Color Temperature	3000K / 4000K / 6500K
-------------------	-----------------------

CRI	≥80
-----	-----

Power Factor	≥0.5
--------------	------


Working Temperature	-10°C~45°C
---------------------	------------

Beam Angle (Optional)	18°
-----------------------	-----

Fixture Dimmable	Non-dimmable
------------------	--------------

Electrical	External Driver
------------	-----------------

Protection class	IP20
------------------	------

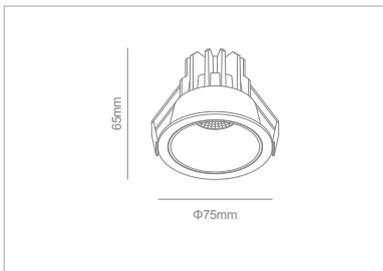

Product Model No.	AP-SPT551-7W	
Packaging Detail	52×41.2×40cm	
	STD PKG	80pcs
	N.W	15.9kgs
	G.W	17.4kgs

AP-SPT551-7W


DC120mA7W BridgeluxDC30-42VLED(COB)DC

3000K/ PRI: 220-240V50/60-Hz 0.06A

Driver SEC: Constant Current;



Warm White 3000K ∠ 18°

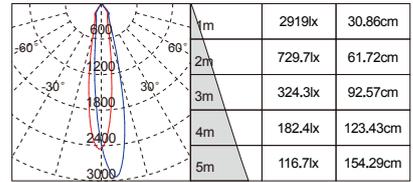

cd Height illuminance Diameter

Especially designed for:

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.



Various Brand of COB LED Light Source:



RECESSED LED  
SPOT LIGHT

TECHNICAL SPECIFICATIONS

Input (Optional)	220-240V~50/60 Hz
Maximum Wattage	10W±10% Max

Number of LEDs	1 LEDs COB
----------------	------------

Luminous Flux	900LM (3000K)
---------------	---------------

Main Material	Die-casting Aluminum
---------------	----------------------

Color Temperature	3000K / 4000K / 6500K
-------------------	-----------------------

CRI	≥80
-----	-----

Power Factor	≥0.9
--------------	------


Working Temperature	-10°C~45°C
---------------------	------------

Beam Angle (Optional)	25°
-----------------------	-----

Fixture Dimmable	Non-dimmable
------------------	--------------

Electrical	External Driver
------------	-----------------

Protection class	IP20
------------------	------

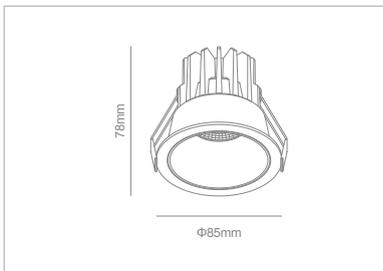


Product Model No.	AP-SPT551-10W	
Packaging Detail	54.5×33.5×44cm	
	STD PKG	60pcs
	N.W	17.4kgs
	G.W	18.9kgs

AP-SPT551-10W

DC250mA10W BridgeluxDC30-42VLED(COB)DC /  
3000KPRI: 220-240V900lm V~/ incl.50/60-Hz 0.12A  
Driver SEC: Constant Current:



Warm White 3000K ∠25°

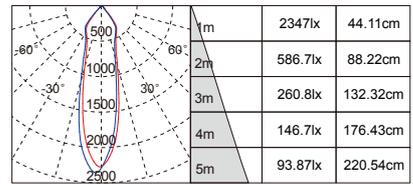

cd Height illuminance Diameter

Especially designed for:

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.



Various Brand of COB LED Light Source:





Product series

# AP-SPT553-7W



RECESSED LED  
SPOT LIGHT

TECHNICAL SPECIFICATIONS

Input (Optional)	220-240V~50/60 Hz
Maximum Wattage	7W±10% Max

Number of LEDs	1 LEDs COB
----------------	------------

Luminous Flux	600LM (3000K)
---------------	---------------

Main Material	Die-casting Aluminum
---------------	----------------------

Color Temperature	3000K / 4000K / 6500K
-------------------	-----------------------

CRI	≥80
-----	-----

Power Factor	≥0.5
--------------	------


Working Temperature	-10°C~45°C
---------------------	------------

Beam Angle (Optional)	17°
-----------------------	-----

Fixture Dimmable	Non-dimmable
------------------	--------------

Electrical	External Driver
------------	-----------------

Protection class	IP20
------------------	------

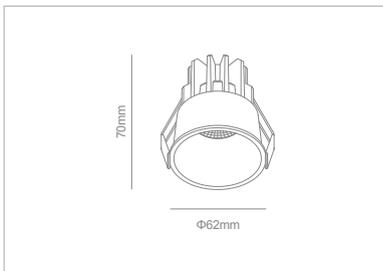

Especially designed for:

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.



Product Model No.	AP-SPT553-7W	
Packaging Detail 	52×41.2×40cm	
	STD PKG	80pcs
	N.W	15.9kgs
	G.W	17.4kgs

AP-SPT553-7W


DC120mA7W BridgeluxDC30-42VDCLD(COB)

/3000KPRI: 220-240600lm /V~incl.50/60-Hz 0.06A

Driver SEC: Constant Current:



Warm White 3000K ∠ 17°

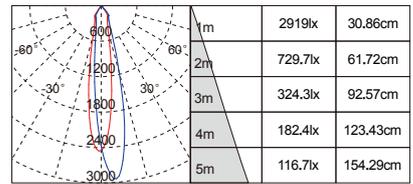

cd Height illuminance Diameter

Option colors



Various Brand of COB LED Light Source:



RECESSED LED  
SPOT LIGHT

TECHNICAL SPECIFICATIONS

Input (Optional)	220-240V~50/60 Hz
Maximum Wattage	10W±10% Max

Number of LEDs	1 LEDs COB
----------------	------------

Luminous Flux	950LM (3000K)
---------------	---------------

Main Material	Die-casting Aluminum
---------------	----------------------

Color Temperature	3000K / 4000K / 6500K
-------------------	-----------------------

CRI	≥80
-----	-----

Power Factor	≥0.9
--------------	------


Working Temperature	-10°C~45°C
---------------------	------------

Beam Angle (Optional)	24°
-----------------------	-----

Fixture Dimmable	Non-dimmable
------------------	--------------

Electrical	External Driver
------------	-----------------

Protection class	IP20
------------------	------

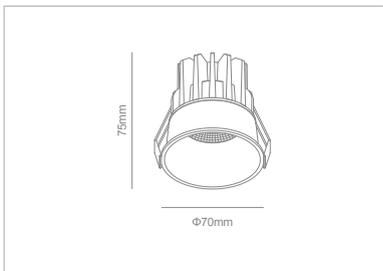

Especially designed for:

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.




Product Model No.	AP-SPT553-10W	
Packaging Detail	54.5×33.5×44cm	
	STD PKG	60pcs
	N.W	17.4kgs
	G.W	18.9kgs

AP-SPT553-10W

DC250mA10W BridgeluxDC30-42VLED(COB)DC /  
3000KPRI: 220-240950lm V~/ incl.50/60-Hz 0.12A  
Driver SEC: Constant Current:




Warm White 3000K ∠24°

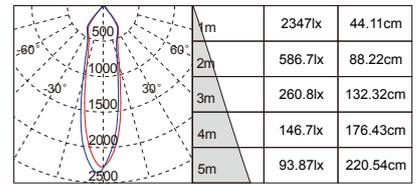

cd Height illuminance Diameter

Option colors



Various Brand of COB LED Light Source:



Product series

# AP-SPT554-7W



RECESSED LED  
SPOT LIGHT

TECHNICAL SPECIFICATIONS

Input (Optional)	220-240V~50/60 Hz
Maximum Wattage	7W±10% Max

Number of LEDs	1 LEDs COB
----------------	------------

Luminous Flux	550LM (3000K)
---------------	---------------

Main Material	Die-casting Aluminum
---------------	----------------------

Color Temperature	3000K / 4000K / 6500K
-------------------	-----------------------

CRI	≥80
-----	-----

Power Factor	≥0.5
--------------	------


Working Temperature	-10°C~45°C
---------------------	------------

Beam Angle (Optional)	18°
-----------------------	-----

Fixture Dimmable	Non-dimmable
------------------	--------------

Electrical	External Driver
------------	-----------------

Protection class	IP20
------------------	------

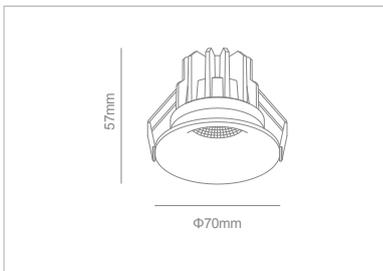

Product Model No.	AP-SPT554-7W	
Packaging Detail	52×41.2×40cm	
	STD PKG	80pcs
	N.W	13.95kgs
	G.W	18kgs

AP-SPT554-7W


DC120mA7W BridgeluxDC30-42VDCLD(COB)

/3000KPRI: 220-240550lm /V~incl.50/60-Hz 0.06A

Driver SEC: Constant Current:



Warm White 3000K ∠ 18°

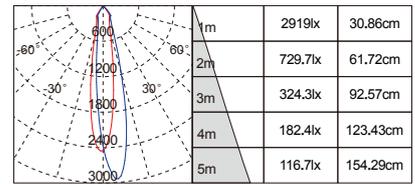

cd Height illuminance Diameter

Especially designed for:

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.



Various Brand of COB LED Light Source:



RECESSED LED  
SPOT LIGHT

TECHNICAL SPECIFICATIONS

Input (Optional)	220-240V~50/60 Hz
Maximum Wattage	10W±10% Max

Number of LEDs	1 LEDs COB
----------------	------------

Luminous Flux	900LM (3000K)
---------------	---------------

Main Material	Die-casting Aluminum
---------------	----------------------

Color Temperature	3000K / 4000K / 6500K
-------------------	-----------------------

CRI	≥80
-----	-----

Power Factor	≥0.9
--------------	------


Working Temperature	-10°C~45°C
---------------------	------------

Beam Angle (Optional)	25°
-----------------------	-----

Fixture Dimmable	Non-dimmable
------------------	--------------

Electrical	External Driver
------------	-----------------

Protection class	IP20
------------------	------

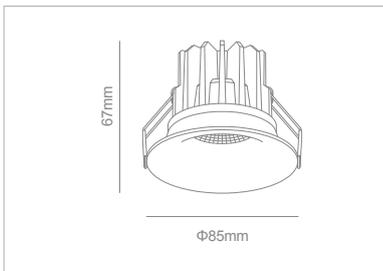

Product Model No.	AP-SPT554-10W	
Packaging Detail	54.5×33.5×44cm	
	STD PKG	60pcs
	N.W	15.45kgs
	G.W	19kgs

AP-SPT554-7W


DC120mA7W BridgeluxDC30-42VDCLED(COB)

/3000KPRI: 220-240550lm /V~incl.50/60-Hz 0.06A

Driver SEC: Constant Current:



Warm White 3000K ∠ 25°

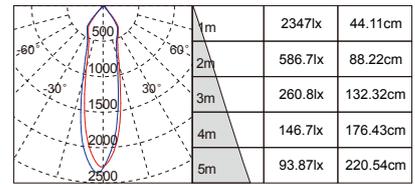

cd      Height      illuminance      Diameter

Especially designed for:

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.



Various Brand of COB LED Light Source:



RECESSED LED  
SPOT LIGHT

TECHNICAL SPECIFICATIONS

Input (Optional)	220-240V~50/60 Hz
Maximum Wattage	12W±10% Max

Number of LEDs	1 LEDs COB
----------------	------------

Luminous Flux	1300LM (3000K)
---------------	----------------

Main Material	Die-casting Aluminum
---------------	----------------------

Color Temperature	3000K / 4000K / 6500K
-------------------	-----------------------

CRI	≥80
-----	-----

Power Factor	≥0.9
--------------	------


Working Temperature	-10°C~45°C
---------------------	------------

Beam Angle (Optional)	18°
-----------------------	-----

Fixture Dimmable	Non-dimmable
------------------	--------------

Electrical	External Driver
------------	-----------------

Protection class	IP20
------------------	------

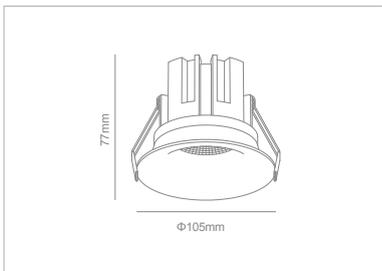


Product Model No.	AP-SPT554-12W	
Packaging Detail 	57×25×44cm	
	STD PKG	40pcs
	N.W	15.2kgs
	G.W	18.3kgs

AP-SPT554-12W

12W Current: Bridgelux DC300mA LED (COB) DC30-42VDC 3000K  
/1300lm PRI: 220-240/ incl. -V~ 50/60 Hz 0.07A



Warm White 3000K ∠18°

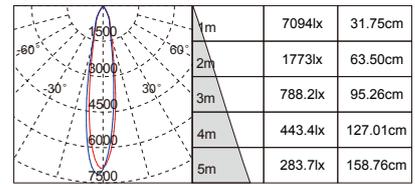

cd      Height      illuminance      Diameter

Especially designed for:

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.



Various Brand of COB LED Light Source:



Product series

# AP-SPT555-7W



RECESSED LED  
SPOT LIGHT

TECHNICAL SPECIFICATIONS

Input (Optional)	220-240V~50/60 Hz
Maximum Wattage	7W±10% Max

Number of LEDs	1 LEDs COB
----------------	------------

Luminous Flux	550LM (3000K)
---------------	---------------

Main Material	Die-casting Aluminum
---------------	----------------------

Color Temperature	3000K / 4000K / 6500K
-------------------	-----------------------

CRI	≥80
-----	-----

Power Factor	≥0.5
--------------	------


Working Temperature	-10°C~45°C
---------------------	------------

Beam Angle (Optional)	18°
-----------------------	-----

Fixture Dimmable	Non-dimmable
------------------	--------------

Electrical	External Driver
------------	-----------------

Protection class	IP20
------------------	------

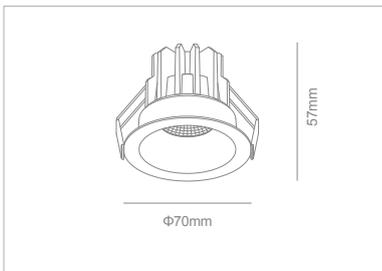

Especially designed for:

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.




Product Model No.	AP-SPT555-7W	
Packaging Detail	52×41.2×40cm	
	STD PKG	80pcs
	N.W	12.85kgs
	G.W	17.5kgs

AP-SPT554-7W

DC120mA7W BridgeluxDC30-42VDCLED(COB) /3000KPRI: 220-240550lm  
V~incl.50/60-Hz 0.06A




Warm White 3000K ∠ 18°

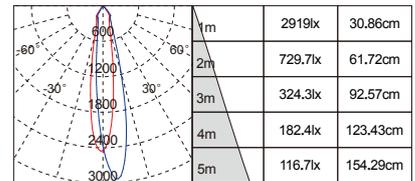

cd Height illuminance Diameter

Option colors



Various Brand of COB LED Light Source:



RECESSED LED  
SPOT LIGHT

TECHNICAL SPECIFICATIONS	
Input (Optional)	220-240V~50/60 Hz
Maximum Wattage	10W±10% Max

Number of LEDs	1 LEDs COB
----------------	------------

Luminous Flux	950LM (3000K)
---------------	---------------

Main Material	Die-casting Aluminum
---------------	----------------------

Color Temperature	3000K / 4000K / 6500K
-------------------	-----------------------

CRI	≥80
-----	-----


Power Factor	≥0.9
--------------	------

Working Temperature	-10°C~45°C
---------------------	------------

Beam Angle (Optional)	25°
-----------------------	-----

Fixture Dimmable	Non-dimmable
------------------	--------------

Electrical	External Driver
Protection class	IP20

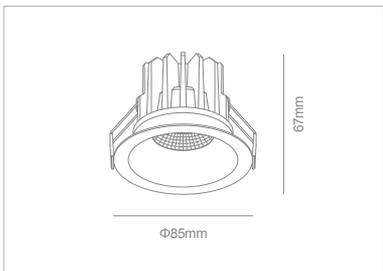

**Especially designed for:**

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.



Product Model No.	AP-SPT555-10W	
Packaging Detail 	54.5×33.5×44cm	
	STD PKG	60pcs
	N.W	14.1kgs
	G.W	17.7kgs

**AP-SPT555-10W**


DC250mA10W BridgeluxDC30-42VDCLED(COB)/

PRI:3000K220-240V50/60-Hz 0.12A


Driver SEC: Constant Current:



Warm White 3000K ∠25°

	1m	2347lx	44.11cm
	2m	586.7lx	88.22cm
	3m	260.8lx	132.32cm
	4m	146.7lx	176.43cm
	5m	93.87lx	220.54cm
cd	Height	iluminance	Diameter

**Option colors**




Various Brand of COB LED Light Source:



RECESSED LED  
SPOT LIGHT

TECHNICAL SPECIFICATIONS	
Input (Optional)	220-240V~50/60 Hz
Maximum Wattage	12W±10% Max
Number of LEDs	
1 LEDs COB	
Luminous Flux	
1300LM (3000K)	
Main Material	
Die-casting Aluminum	
Color Temperature	
3000K / 4000K / 6500K	

CRI	≥80
Power Factor	≥0.9
Working Temperature	-10°C~45°C
Beam Angle (Optional)	18°
Fixture Dimmable	Non-dimmable
Electrical	External Driver
Protection class	IP20

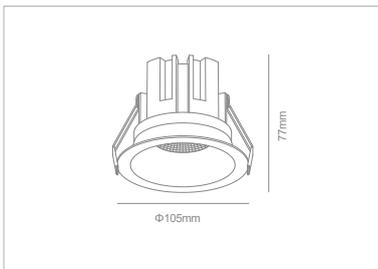

**Especially designed for:**

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.



Product Model No.	AP-SPT555-12W	
Packaging Detail	57×25×44cm	
	STD PKG	40pcs
	N.W	14.55kgs
	G.W	17.6kgs

**AP-SPT555-12W**

12W Current: Bridgelux DC300mA LED (COB) DC30-42VDC 3000K / 1300lm PRI: 220-240/ incl. -V~ 50/60 Hz 0.07A



Warm White 3000K ∠18°

	1m	7094lx	31.75cm
	2m	1773lx	63.50cm
	3m	788.2lx	95.26cm
	4m	443.4lx	127.01cm
	5m	283.7lx	158.76cm
cd	Height	illuminance	Diameter

**Option colors**



Various Brand of COB LED Light Source:



Product series

# AP-SPT556-7W



RECESSED LED  
SPOT LIGHT

TECHNICAL SPECIFICATIONS

Input (Optional)	220-240V~50/60 Hz
Maximum Wattage	7W±10% Max

Number of LEDs	1 LEDs COB
----------------	------------

Luminous Flux	550LM (3000K)
---------------	---------------

Main Material	Die-casting Aluminum
---------------	----------------------

Color Temperature	3000K / 4000K / 6500K
-------------------	-----------------------

CRI	≥80
-----	-----

Power Factor	≥0.5
--------------	------


Working Temperature	-10°C~45°C
---------------------	------------

Beam Angle (Optional)	18°
-----------------------	-----

Fixture Dimmable	Non-dimmable
------------------	--------------

Electrical	External Driver
------------	-----------------

Protection class	IP20
------------------	------

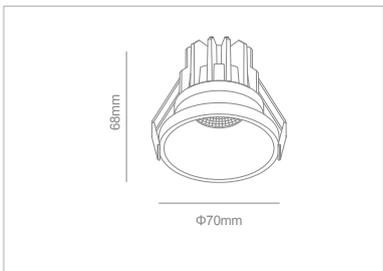

Product Model No.	AP-SPT556-7W	
Packaging Detail	52×41.2×40cm	
	STD PKG	80pcs
	N.W	15.35kgs
	G.W	19.5kgs

**AP-SPT556-7W**

7W Bridgelux LED(COB) 3000K 550lm / incl. - Driver SEC: Constant Current:  
DC170mA DC30-42VDC / PRI: 220-240 V~ 50/60 Hz 0.08A



Warm White 3000K ∠ 18°

	1m	2919lx	30.86cm
	2m	729.7lx	61.72cm
	3m	324.3lx	92.57cm
	4m	182.4lx	123.43cm
	5m	116.7lx	154.29cm
	cd	Height	illuminance

**Especially designed for:**

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.



Various Brand of COB LED Light Source:



RECESSED LED  
SPOT LIGHT

TECHNICAL SPECIFICATIONS

Input (Optional)	220-240V~50/60 Hz
Maximum Wattage	10W±10% Max

Number of LEDs	1 LEDs COB
----------------	------------

Luminous Flux	950LM (3000K)
---------------	---------------

Main Material	Die-casting Aluminum
---------------	----------------------

Color Temperature	3000K / 4000K / 6500K
-------------------	-----------------------

CRI	≥80
-----	-----

Power Factor	≥0.9
--------------	------


Working Temperature	-10°C~45°C
---------------------	------------

Beam Angle (Optional)	25°
-----------------------	-----

Fixture Dimmable	Non-dimmable
------------------	--------------

Electrical	External Driver
------------	-----------------

Protection class	IP20
------------------	------

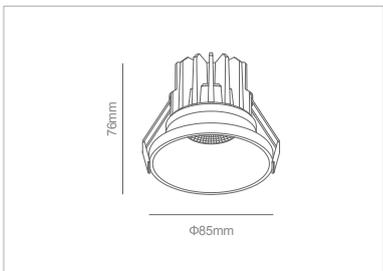

Product Model No.	AP-SPT556-10W	
Packaging Detail	54.5×33.5×44cm	
	STD PKG	60pcs
	N.W	15.2kgs
	G.W	18.8kgs

AP-SPT556-10W


DC250mA10W BridgeluxDC30-42VDCLED(COB)/

PRI:3000K220-240V50/60-Hz 0.12A

Driver SEC: Constant Current:



Warm White 3000K ∠25°

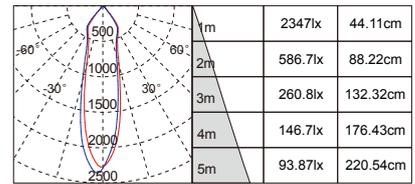

cd      Height      illuminance      Diameter

Especially designed for:

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.



Various Brand of COB LED Light Source:



RECESSED LED  
SPOT LIGHT

TECHNICAL SPECIFICATIONS

Input (Optional)	220-240V~50/60 Hz
Maximum Wattage	12W±10% Max

Number of LEDs	1 LEDs COB
----------------	------------

Luminous Flux	1300LM (3000K)
---------------	----------------

Main Material	Die-casting Aluminum
---------------	----------------------

Color Temperature	3000K / 4000K / 6500K
-------------------	-----------------------

CRI	≥80
-----	-----

Power Factor	≥0.9
--------------	------


Working Temperature	-10°C~45°C
---------------------	------------

Beam Angle (Optional)	18°
-----------------------	-----

Fixture Dimmable	Non-dimmable
------------------	--------------

Electrical	External Driver
------------	-----------------

Protection class	IP20
------------------	------

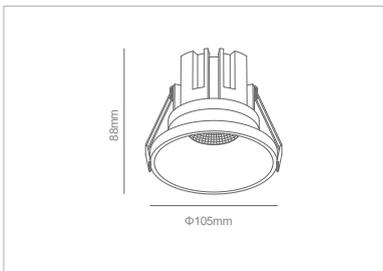


Product Model No.	AP-SPT556-12W	
Packaging Detail	57×25×44cm	
	STD PKG	40pcs
	N.W	16kgs
	G.W	19kgs

## AP-SPT556-12W

12W Current: Bridgelux DC300mA LED (COB) DC30-42VDC 3000K / 1300lm PRI: 220-240/ incl. -V~50/60 Hz 0.07A



Warm White 3000K ∠18°

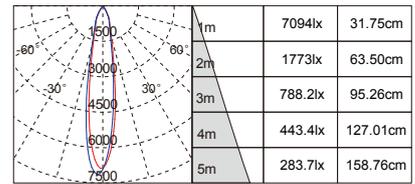

cd      Height      illuminance      Diameter

Especially designed for:

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.




Various Brand of COB LED Light Source:



Product series

# AP-SPT557-7W

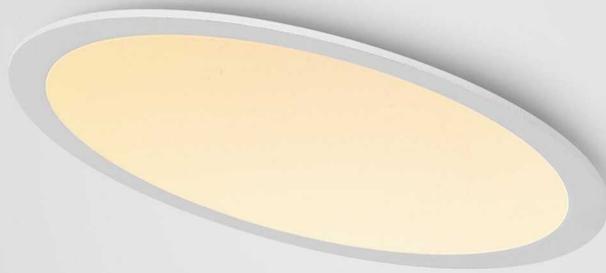

RECESSED LED  
SPOT LIGHT

TECHNICAL SPECIFICATIONS

Input (Optional)	220-240V~50/60 Hz
Maximum Wattage	7W±10% Max

Number of LEDs	1 LEDs COB
----------------	------------

Luminous Flux	550LM (3000K)
---------------	---------------

Main Material	Die-casting Aluminum
---------------	----------------------

Color Temperature	3000K / 4000K / 6500K
-------------------	-----------------------

CRI	≥80
-----	-----

Power Factor	≥0.5
--------------	------


Working Temperature	-10°C~45°C
---------------------	------------

Beam Angle (Optional)	18°
-----------------------	-----

Fixture Dimmable	Non-dimmable
------------------	--------------

Electrical	External Driver
------------	-----------------

Protection class	IP20
------------------	------

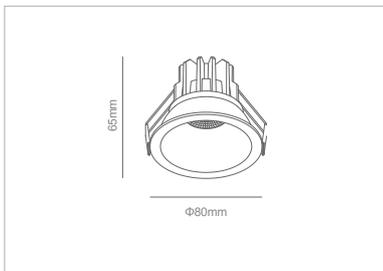


Product Model No.	AP-SPT556-7W	
Packaging Detail 	52×41.2×40cm	
	STD PKG	80pcs
	N.W	13.9kgs
	G.W	18kgs

**AP-SPT556-7W**

7W Bridgelux LED(COB) 3000K 550lm / incl. - Driver SEC: Constant Current:  
DC170mA DC30-42VDC / PRI: 220-240 V~ 50/60 Hz 0.08A



Warm White 3000K ∠ 18°

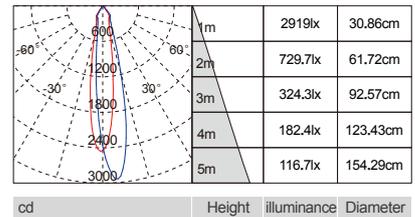

Option colors



Especially designed for:

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.



Various Brand of COB LED Light Source:



RECESSED LED  
SPOT LIGHT

TECHNICAL SPECIFICATIONS

Input (Optional)	220-240V~50/60 Hz
Maximum Wattage	10W±10% Max

Number of LEDs	1 LEDs COB
----------------	------------

Luminous Flux	900LM (3000K)
---------------	---------------

Main Material	Die-casting Aluminum
---------------	----------------------

Color Temperature	3000K / 4000K / 6500K
-------------------	-----------------------

CRI	≥80
-----	-----

Power Factor	≥0.9
--------------	------


Working Temperature	-10°C~45°C
---------------------	------------

Beam Angle (Optional)	25°
-----------------------	-----

Fixture Dimmable	Non-dimmable
------------------	--------------

Electrical	External Driver
------------	-----------------

Protection class	IP20
------------------	------

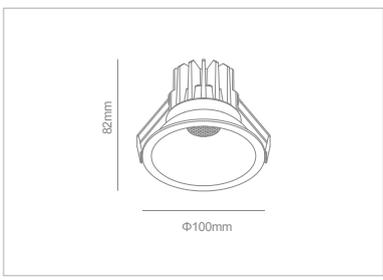

**Especially designed for:**  
Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.




Product Model No.	AP-SPT556-10W	
Packaging Detail	54.5×33.5×44cm	
	STD PKG	60pcs
	N.W	15.15kgs
	G.W	18.7kgs

**AP-SPT556-10W**

DC250mA10W BridgeluxDC30-42VDCLED(COB)  
PRI:3000K220-240900lmV~/ incl.50/60-Hz 0.12A  
Driver SEC: Constant Current:



Warm White 3000K ∠25°

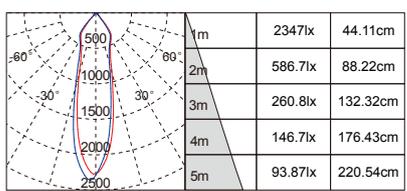

cd      Height      illuminance      Diameter

**Option colors**



Various Brand of COB LED Light Source:



RECESSED LED  
SPOT LIGHT

TECHNICAL SPECIFICATIONS

Input (Optional)	220-240V~50/60 Hz
Maximum Wattage	12W±10% Max

Number of LEDs	1 LEDs COB
----------------	------------

Luminous Flux	1300LM (3000K)
---------------	----------------

Main Material	Die-casting Aluminum
---------------	----------------------

Color Temperature	3000K / 4000K / 6500K
-------------------	-----------------------

CRI	≥80
-----	-----

Power Factor	≥0.9
--------------	------


Working Temperature	-10°C~45°C
---------------------	------------

Beam Angle (Optional)	18°
-----------------------	-----

Fixture Dimmable	Non-dimmable
------------------	--------------

Electrical	External Driver
------------	-----------------

Protection class	IP20
------------------	------

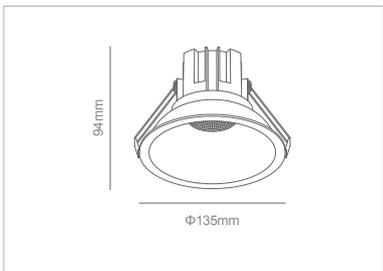

Especially designed for:

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.



Product Model No.	AP-SPT556-12W	
Packaging Detail	58×30×44cm	
	STD PKG	40pcs
	N.W	12.95kgs
	G.W	16.3kgs


AP-SPT556-12W

12W Current: Bridgelux DC300mA LED (COB) DC30-42VDC 3000K

/1300lm PRI: 220-240/ incl. -V~ 50/60 Hz 0.07A



Warm White 3000K ∠18°

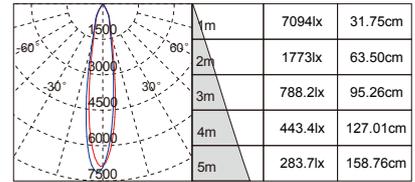

cd      Height      Illuminance      Diameter

Option colors



Various Brand of COB LED Light Source:



Product series


# AP-SPT559-7W



RECESSED LED  
SPOT LIGHT


TECHNICAL SPECIFICATIONS

<b>Input (Optional)</b>	220-240V~50/60 Hz
<b>Maximum Wattage</b>	7W±10% Max
<b>Number of LEDs</b>	
1 LEDs COB	
<b>Luminous Flux</b>	
550LM (3000K)	
<b>Main Material</b>	
Die-casting Aluminum	
<b>Color Temperature</b>	
3000K / 4000K / 6500K	
<b>CRI</b>	≥80
<b>Power Factor</b>	≥0.5
<b>Working Temperature</b>	-10°C~45°C
<b>Beam Angle (Optional)</b>	18°
<b>Fixture Dimmable</b>	Non-dimmable
<b>Electrical</b>	Philips External Driver
<b>Protection class</b>	IP20

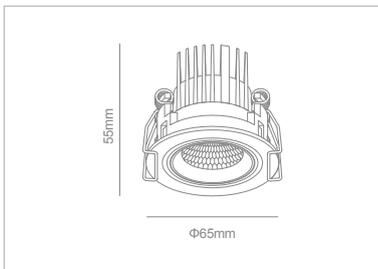

**Especially designed for:**

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.

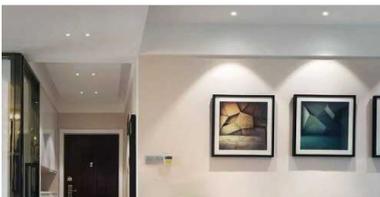


<b>Product Model No.</b>	AP-SPT559-7W	
<b>Packaging Detail</b>	52×41.2×40cm	
	STD PKG	80pcs
	N.W	15.35kgs
	G.W	19.5kgs

**AP-SPT559-7W**

7W Bridgelux LED(COB) 3000K 550lm / incl. PHILIPS Driver 220-240 V~ 50/60 Hz



Warm White 3000K ∠ 18°

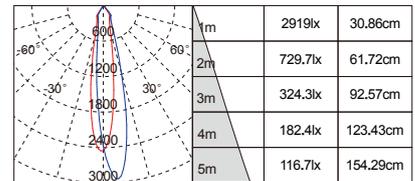

cd      Height      illuminance      Diameter

**Option colors**




**Various Brand of COB LED Light Source:**



RECESSED LED  
SPOT LIGHT

TECHNICAL SPECIFICATIONS

<b>Input (Optional)</b>	220-240V~50/60 Hz
<b>Maximum Wattage</b>	10W±10% Max
<b>Number of LEDs</b>	
1 LEDs COB	
<b>Luminous Flux</b>	
950LM (3000K)	
<b>Main Material</b>	
Die-casting Aluminum	
<b>Color Temperature</b>	
3000K / 4000K / 6500K	
<b>CRI</b>	≥80
<b>Power Factor</b>	≥0.9
<b>Working Temperature</b>	-10°C~45°C
<b>Beam Angle (Optional)</b>	25°
<b>Fixture Dimmable</b>	Non-dimmable
<b>Electrical</b>	Philips External Driver
<b>Protection class</b>	IP20

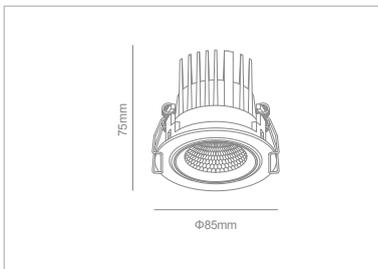

**Especially designed for:**

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.




<b>Product Model No.</b>	AP-SPT559-10W	
<b>Packaging Detail</b>	54.5×33.5×44cm	
	STD PKG	60pcs
	N.W	15.2kgs
	G.W	18.8kgs

**AP-SPT559-10W**

10W Bridgelux LED(COB) 3000K 950lm / incl. PHILIPS Driver 220-240 V~ 50/60 Hz



Warm White 3000K ∠ 25°

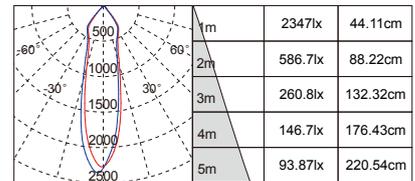

cd      Height      illuminance      Diameter

**Option colors**



**Various Brand of COB LED Light Source:**





Product series

# AP-SPT560-7W



RECESSED LED  
SPOT LIGHT

TECHNICAL SPECIFICATIONS

Input (Optional)	220-240V~50/60 Hz
Maximum Wattage	7W±10% Max

Number of LEDs	1 LEDs COB
----------------	------------

Luminous Flux	595LM (3000K)
---------------	---------------

Main Material	Die-casting Aluminum
---------------	----------------------

Color Temperature	3000K / 4000K / 6500K
-------------------	-----------------------

CRI	≥80
-----	-----

Power Factor	≥0.8
--------------	------


Working Temperature	-10°C~45°C
---------------------	------------

Beam Angle (Optional)	36°
-----------------------	-----

Fixture Dimmable	Non-dimmable
------------------	--------------

Electrical	External Driver
------------	-----------------

Protection class	IP20
------------------	------

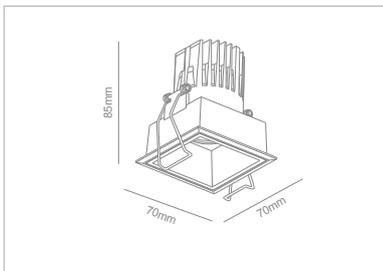

Especially designed for:

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.



Product Model No.	AP-SPT560-7W	
Packaging Detail	54.5×40×32.6cm	
	STD PKG	60pcs
	N.W	15.21kgs
	G.W	18.4kgs

AP-SPT560-7W


DC170mA7W BridgeluxDC30-42VDCLD(COB)

/3000KPRI: 220-240595lm /V~incl.50/60-Hz 0.05A

Driver SEC: Constant Current:



Warm White 3000K ∠36°

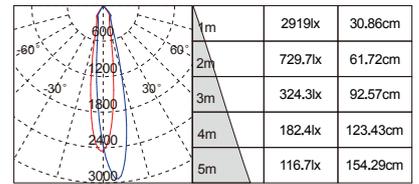

cd Height illuminance Diameter

Option colors




Various Brand of COB LED Light Source:



RECESSED LED  
SPOT LIGHT

TECHNICAL SPECIFICATIONS	
<b>Input (Optional)</b>	220-240V~50/60 Hz
<b>Maximum Wattage</b>	2×7W±10% Max
<b>Number of LEDs</b>	
2 LEDs COB	
<b>Luminous Flux</b>	
1120LM (3000K)	
<b>Main Material</b>	
Die-casting Aluminum	
<b>Color Temperature</b>	
3000K / 4000K / 6500K	

<b>CRI</b>	≥80
<b>Power Factor</b>	≥0.9
<b>Working Temperature</b>	-10°C~45°C
<b>Beam Angle (Optional)</b>	36°
<b>Fixture Dimmable</b>	Non-dimmable
<b>Electrical</b>	External Driver
<b>Protection class</b>	IP20

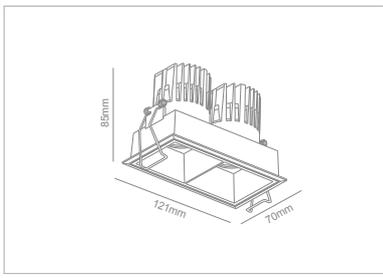

**Especially designed for:**  
Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.




Product Model No.	AP-SPT560-2×7W	
Packaging Detail	44×33×43cm	
	STD PKG	32pcs
	N.W	14kgs
	G.W	17kgs

**AP-SPT560-2×7W**

2×7W Bridgelux LED(COB) 3000K 1120lm / incl. MEGALUX Driver SEC: Constant Current: DC170mA DC30-42VDC / PRI: 220-240 V~ 50/60 Hz 0.05A



Warm White 3000K ∠ 36°

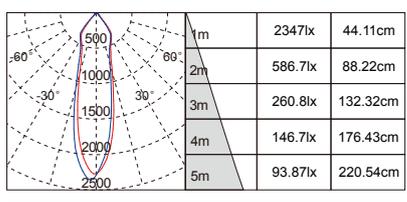

cd      Height      illuminance      Diameter

**Option colors**



Various Brand of COB LED Light Source:



RECESSED LED  
SPOT LIGHT

TECHNICAL SPECIFICATIONS

<b>Input (Optional)</b>	220-240V~50/60 Hz
<b>Maximum Wattage</b>	3×7W±10% Max

<b>Number of LEDs</b>	3 LEDs COB
-----------------------	------------

<b>Luminous Flux</b>	1680LM (3000K)
----------------------	----------------

<b>Main Material</b>	Die-casting Aluminum
----------------------	----------------------

<b>Color Temperature</b>	3000K / 4000K / 6500K
--------------------------	-----------------------

<b>CRI</b>	≥80
------------	-----

<b>Power Factor</b>	≥0.9
---------------------	------


<b>Working Temperature</b>	-10°C~45°C
----------------------------	------------

<b>Beam Angle (Optional)</b>	36°
------------------------------	-----

<b>Fixture Dimmable</b>	Non-dimmable
-------------------------	--------------

<b>Electrical</b>	External Driver
-------------------	-----------------

<b>Protection class</b>	IP20
-------------------------	------

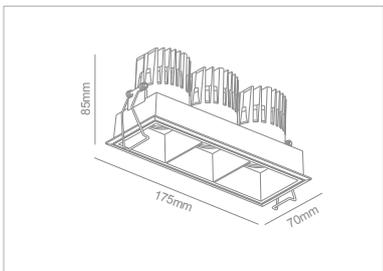

Especially designed for:

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.




<b>Product Model No.</b>	AP-SPT560-3×7W	
<b>Packaging Detail</b>	43×40×32.5cm	
	STD PKG	24pcs
	N.W	15.8kgs
	G.W	18.5kgs

AP-SPT560-3×7W

3×7W Current: Bridgelux DC170mA LED(COB) DC30-42VDC 3000K/ PRI: 1680lm 220-240/ incl. V~ Driver 50/60 SEC: Hz 0.05A Constant



Warm White 3000K ∠36°

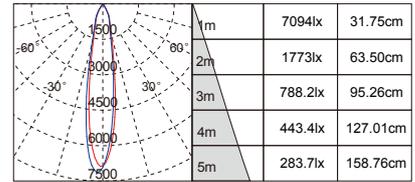

cd Height illuminance Diameter

Option colors



Various Brand of COB LED Light Source:





RECESSED LED  
SPOT LIGHT

TECHNICAL SPECIFICATIONS

Input (Optional)	220-240V~50/60 Hz
Maximum Wattage	10W±10% Max

Number of LEDs	1 LEDs COB
----------------	------------

Luminous Flux	700LM (3000K)
---------------	---------------

Main Material	Die-casting Aluminum
---------------	----------------------

Color Temperature	3000K / 4000K / 6500K
-------------------	-----------------------

CRI	≥80
-----	-----

Power Factor	≥0.9
--------------	------


Working Temperature	-10°C~45°C
---------------------	------------

Beam Angle (Optional)	36°
-----------------------	-----

Fixture Dimmable	Non-dimmable
------------------	--------------

Electrical	External Driver
------------	-----------------

Protection class	IP20
------------------	------

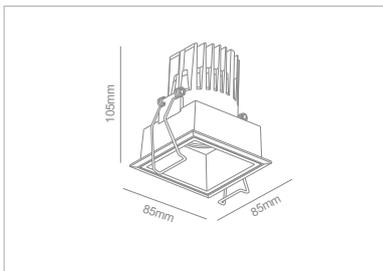

Especially designed for:

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.



Product Model No.	AP-SPT560-10W	
Packaging Detail 	57×25×38cm	
	STD PKG	60pcs
	N.W	11.85kgs
	G.W	14.5kgs

AP-SPT560-10W


DC250mA10W BridgeluxDC30-42VDCLED(COB)/

PRI:3000K220-240700lmV~/incl.50/60-Hz 0.065A

Driver SEC: Constant Current:



Warm White 3000K ∠36°

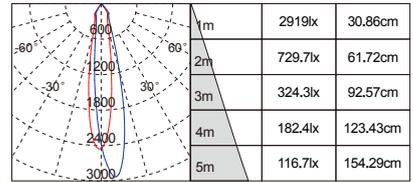

cd Height illuminance Diameter

Option colors



Various Brand of COB LED Light Source:



RECESSED LED  
SPOT LIGHT

TECHNICAL SPECIFICATIONS

<b>Input (Optional)</b>	220-240V~50/60 Hz
<b>Maximum Wattage</b>	2×10W±10% Max


<b>Number of LEDs</b>	2 LEDs COB
-----------------------	------------

<b>Luminous Flux</b>	1600LM (3000K)
----------------------	----------------

<b>Main Material</b>	Die-casting Aluminum
----------------------	----------------------

<b>Color Temperature</b>	3000K / 4000K / 6500K
--------------------------	-----------------------

<b>CRI</b>	≥80
<b>Power Factor</b>	≥0.9
<b>Working Temperature</b>	-10°C~45°C
<b>Beam Angle (Optional)</b>	36°
<b>Fixture Dimmable</b>	Non-dimmable
<b>Electrical</b>	External Driver
<b>Protection class</b>	IP20

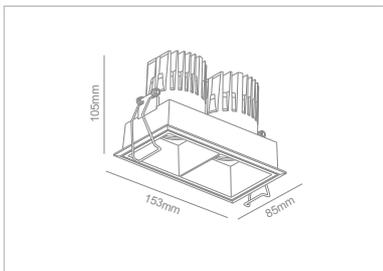

Especially designed for:

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.



<b>Product Model No.</b>	AP-SPT560-2×10W	
<b>Packaging Detail</b>	44×33×43cm	
	STD PKG	32pcs
	N.W	14kgs
	G.W	17kgs

AP-SPT560-2×10W

Current:2×10W


BridgeluxDC250mALED(COB)DC30-42VDC3000K/

PR1:1600lm220-240/ incl.V~-50/60 Hz 0.065A

Driver SEC: Constant



Warm White 3000K ∠36°

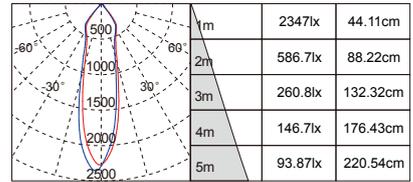

cd Height illuminance Diameter

Option colors



Various Brand of COB LED Light Source:



RECESSED LED  
SPOT LIGHT

TECHNICAL SPECIFICATIONS

Input (Optional)	220-240V~50/60 Hz
Maximum Wattage	3×7W±10% Max

Number of LEDs	3 LEDs COB
----------------	------------

Luminous Flux	2400LM (3000K)
---------------	----------------

Main Material	Die-casting Aluminum
---------------	----------------------

Color Temperature	3000K / 4000K / 6500K
-------------------	-----------------------

CRI	≥80
-----	-----


Power Factor	≥0.9
--------------	------

Working Temperature	-10°C~45°C
---------------------	------------

Beam Angle (Optional)	36°
-----------------------	-----

Fixture Dimmable	Non-dimmable
------------------	--------------

Electrical	External Driver
Protection class	IP20

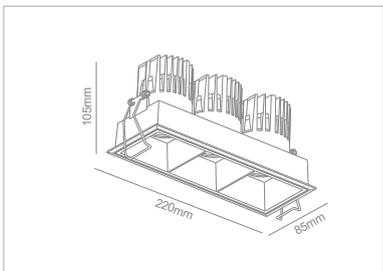

Especially designed for:

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.



Product Model No.	AP-SPT560-3×10W	
Packaging Detail	43×40×32.5cm	
	STD PKG	24pcs
	N.W	15.8kgs
	G.W	18.5kgs


AP-SPT560-3×10W

Current:3×10W


BridgeluxDC250mALED(COB)DC30-42VDC3000K/

PRI:2400lm220-240/ incl.V~50/60 Hz 0.065A

Driver SEC: Constant



Warm White 3000K ∠36°

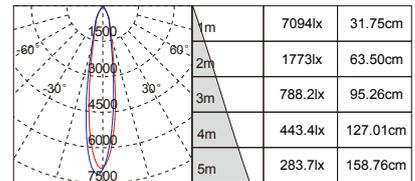

cd Height illuminance Diameter

Option colors



Various Brand of COB LED Light Source:



Product series

# AP-SPT563-7W



RECESSED LED  
SPOT LIGHT

TECHNICAL SPECIFICATIONS

Input (Optional)	220-240V~50/60 Hz
Maximum Wattage	7W±10% Max

Number of LEDs	1 LEDs COB
----------------	------------

Luminous Flux	550LM (3000K)
---------------	---------------

Main Material	Die-casting Aluminum
---------------	----------------------

Color Temperature	3000K / 4000K / 6500K
-------------------	-----------------------

CRI	≥80
-----	-----

Power Factor	≥0.5
--------------	------


Working Temperature	-10°C~45°C
---------------------	------------

Beam Angle (Optional)	18°
-----------------------	-----

Fixture Dimmable	Non-dimmable
------------------	--------------

Electrical	External Driver
------------	-----------------

Protection class	IP20
------------------	------

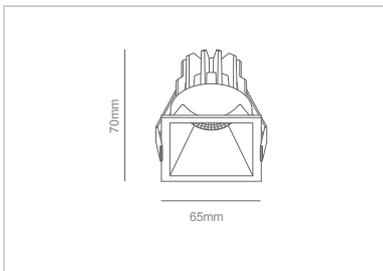


Product Model No.	AP-SPT563-7W	
Packaging Detail 	52×41.2×40cm	
	STD PKG	80pcs
	N.W	14.4kgs
	G.W	18.5kgs

**AP-SPT563-7W**

7W Bridgelux LED(COB) 3000K 550lm / incl. - Driver SEC: Constant Current:  
DC170mA DC30-42VDC / PRI: 220-240 V~ 50/60 Hz 0.08A



Warm White 3000K ∠ 18°

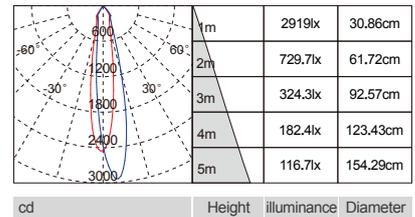

Option colors



Especially designed for:

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.



Various Brand of COB LED Light Source:



RECESSED LED  
SPOT LIGHT

TECHNICAL SPECIFICATIONS

Input (Optional)	220-240V~50/60 Hz
Maximum Wattage	10W±10% Max

Number of LEDs	1 LEDs COB
----------------	------------

Luminous Flux	900LM (3000K)
---------------	---------------

Main Material	Die-casting Aluminum
---------------	----------------------

Color Temperature	3000K / 4000K / 6500K
-------------------	-----------------------

CRI	≥80
-----	-----

Power Factor	≥0.9
--------------	------


Working Temperature	-10°C~45°C
---------------------	------------

Beam Angle (Optional)	25°
-----------------------	-----

Fixture Dimmable	Non-dimmable
------------------	--------------

Electrical	External Driver
------------	-----------------

Protection class	IP20
------------------	------

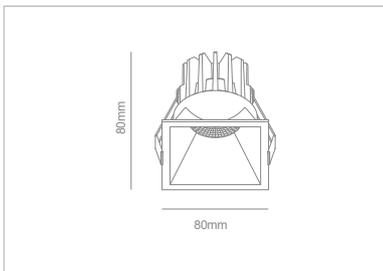

**Especially designed for:**

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.



Product Model No.	AP-SPT563-10W	
Packaging Detail 	54.5×33.5×44cm	
	STD PKG	60pcs
	N.W	15.95kgs
	G.W	19.5kgs

**AP-SPT563-10W**


DC250mA10W BridgeluxDC30-42VDCLED(COB)/

PRI:3000K220-240900lmV~/ incl.50/60-Hz 0.12A

Driver SEC: Constant Current:



Warm White 3000K ∠ 25°

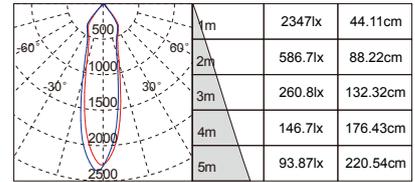


cd Height Illuminance Diameter

**Option colors**



**Various Brand of COB LED Light Source:**



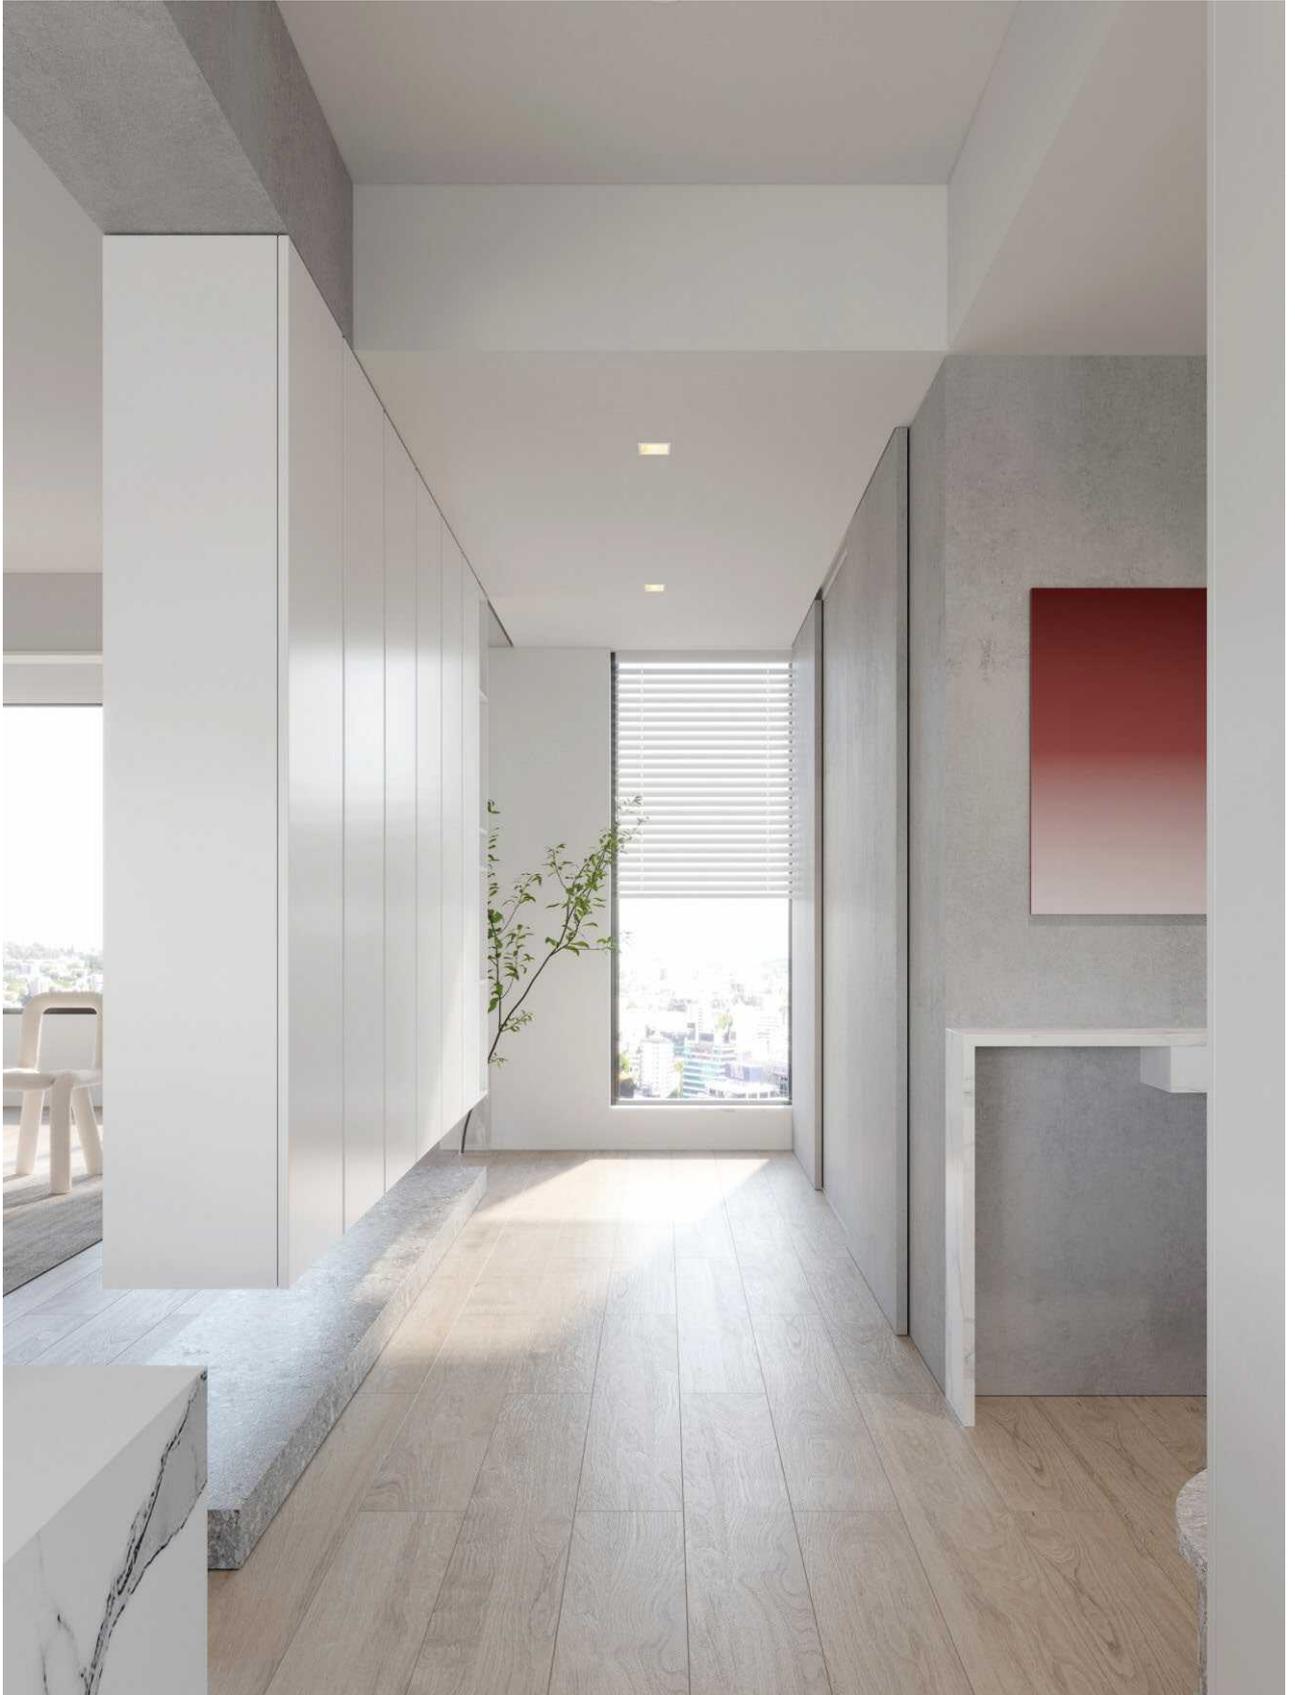

Product series

# AP-SPT564-7W



RECESSED LED  
SPOT LIGHT

TECHNICAL SPECIFICATIONS

Input (Optional)	220-240V~50/60 Hz
Maximum Wattage	7W±10% Max

Number of LEDs	1 LEDs COB
----------------	------------

Luminous Flux	550LM (3000K)
---------------	---------------

Main Material	Die-casting Aluminum
---------------	----------------------

Color Temperature	3000K / 4000K / 6500K
-------------------	-----------------------

CRI	≥80
-----	-----

Power Factor	≥0.5
--------------	------


Working Temperature	-10°C~45°C
---------------------	------------

Beam Angle (Optional)	18°
-----------------------	-----

Fixture Dimmable	Non-dimmable
------------------	--------------

Electrical	External Driver
------------	-----------------

Protection class	IP20
------------------	------

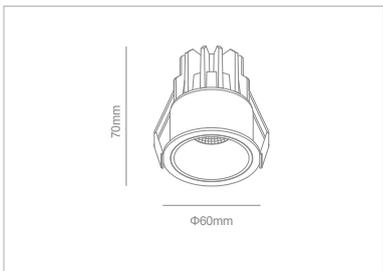

Especially designed for:

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.




Product Model No.	AP-SPT564-7W	
Packaging Detail 	52x41.2x40cm	
	STD PKG	80pcs
	N.W	12.6kgs
	G.W	16.5kgs

**AP-SPT564-7W**

7W Bridgelux LED(COB) 3000K 550lm / incl. - Driver SEC: Constant Current: DC170mA DC30-42VDC / PRI: 220-240 V~ 50/60 Hz 0.08A



Warm White 3000K ∠ 18°

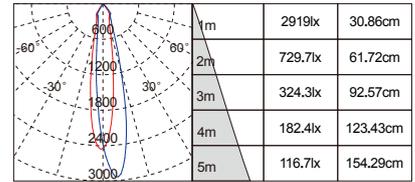

cd      Height    iluminance    Diameter

Option colors

Outer Ring White & Many Colorful Inner Ring for Optional



Outer Ring Black & Many Colorful Inner Ring for Optional



Various Brand of COB LED Light Source:



RECESSED LED  
SPOT LIGHT

TECHNICAL SPECIFICATIONS

Input (Optional)	220-240V~50/60 Hz
Maximum Wattage	10W±10% Max

Number of LEDs	1 LEDs COB
----------------	------------

Luminous Flux	900LM (3000K)
---------------	---------------

Main Material	Die-casting Aluminum
---------------	----------------------

Color Temperature	3000K / 4000K / 6500K
-------------------	-----------------------

CRI	≥80
-----	-----

Power Factor	≥0.9
--------------	------


Working Temperature	-10°C~45°C
---------------------	------------

Beam Angle (Optional)	25°
-----------------------	-----

Fixture Dimmable	Non-dimmable
------------------	--------------

Electrical	External Driver
------------	-----------------

Protection class	IP20
------------------	------

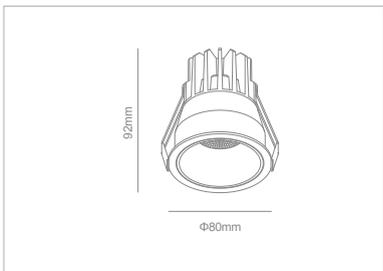

**Especially designed for:**

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.



Product Model No.	AP-SPT564-10W	
Packaging Detail 	54.5×33.5×44cm	
	STD PKG	60pcs
	N.W	17.4kgs
	G.W	20.6kgs

**AP-SPT564-10W**


DC250mA10W BridgeluxDC30-42VDCLED(COB)/

PRI:3000K220-240V~incl.50/60-Hz 0.12A

Driver SEC: Constant Current:



Warm White 3000K ∠25°

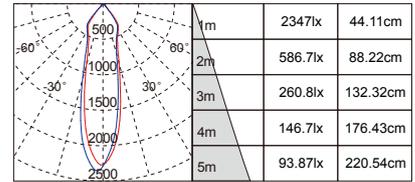

cd      Height    illuminance    Diameter

**Option colors**

Outer Ring White & Many Colorful Inner Ring for Optional



Outer Ring Black & Many Colorful Inner Ring for Optional



Various Brand of COB LED Light Source:



RECESSED LED  
SPOT LIGHT

TECHNICAL SPECIFICATIONS

Input (Optional)	220-240V~50/60 Hz
Maximum Wattage	12W±10% Max

Number of LEDs	1 LEDs COB
----------------	------------

Luminous Flux	1680LM (3000K)
---------------	----------------

Main Material	Die-casting Aluminum
---------------	----------------------

Color Temperature	3000K / 4000K / 6500K
-------------------	-----------------------

CRI	≥80
-----	-----


Power Factor	≥0.9
--------------	------

Working Temperature	-10°C~45°C
---------------------	------------

Beam Angle (Optional)	36°
-----------------------	-----

Fixture Dimmable	Non-dimmable
------------------	--------------

Electrical	External Driver
Protection class	IP20

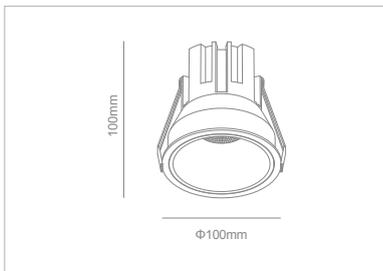

Especially designed for:


Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.




Product Model No.	AP-SPT564-12W	
Packaging Detail 	57×25×48.8cm	
	STD PKG	40pcs
	N.W	16.8kgs
	G.W	19.2kgs

AP-SPT564-12W

12W Current: Bridgelux DC300mA LED (COB) DC30-42VDC 3100K  
/1300lm PRI: 220-240/ incl. -V~ 50/60 Hz 0.07A



Warm White 3000K ∠36°

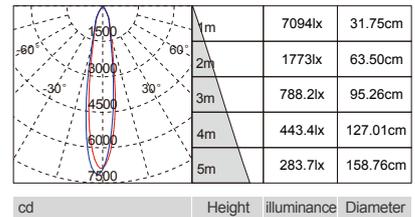

Option colors

Outer Ring White & Many Colorful Inner Ring for Optional



Outer Ring Black & Many Colorful Inner Ring for Optional



Various Brand of COB LED Light Source:



Product series


# AP-SPT701-7W



RECESSED LED  
SPOT LIGHT

TECHNICAL SPECIFICATIONS

<b>Input (Optional)</b>	220-240V~50/60 Hz
<b>Maximum Wattage</b>	7W±10% Max
<b>Number of LEDs</b>	
1 LED COB	
<b>Luminous Flux</b>	
270LM (3000K)	
<b>Main Material</b>	
Aluminum & PC Lens Diffuser	
<b>Color Temperature</b>	
3000K / 4000K / 6500K	
<b>CRI</b>	≥80
<b>Power Factor</b>	≥0.8
<b>Working Temperature</b>	-10°C~45°C
<b>Beam Angle (Optional)</b>	18°
<b>Fixture Dimmable</b>	Non-dimmable
<b>Electrical</b>	External Driver
<b>Protection class</b>	IP20

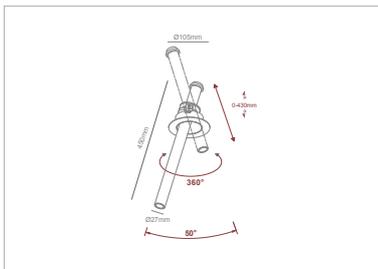

**Especially designed for:**

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.



<b>Product Model No.</b>	AP-SPT701-7W	
<b>Packaging Detail</b>	62×62×30.5cm	
	STD PKG	25pcs
	N.W	11kgs
	G.W	13.5kgs

**VAP-SPT701-7W**

DC8-12VDC7W LED 3000K/  
PRI:270lm220-240/ incl.V~50/60 Hz 0.050A  
Driver SEC: Constant Current: DC600mA



Warm White 3000K ∠ 18°

	1m	1396.80lx	35.63cm
	2m	349.20lx	71.25cm
	3m	155.20lx	106.88 cm
	4m	87.30lx	142.50 cm
	5m	55.87lx	178.13 cm
<b>cd</b>	<b>Height</b>	<b>illuminance</b>	<b>Diameter</b>


Various Brand of COB LED Light Source:



RECESSED LED  
SPOT LIGHT

TECHNICAL SPECIFICATIONS

<b>Input (Optional)</b>	220-240V~50/60 Hz
<b>Maximum Wattage</b>	7W±10% Max
<b>Number of LEDs</b>	1 LED COB
<b>Luminous Flux</b>	270LM (3000K)
<b>Main Material</b>	Aluminum & PC Lens Diffuser
<b>Color Temperature</b>	3000K / 4000K / 6500K
<b>CRI</b>	≥80
<b>Power Factor</b>	≥0.8
<b>Working Temperature</b>	-10°C~45°C
<b>Beam Angle (Optional)</b>	18°
<b>Fixture Dimmable</b>	Non-dimmable
<b>Electrical</b>	External Driver
<b>Protection class</b>	IP20

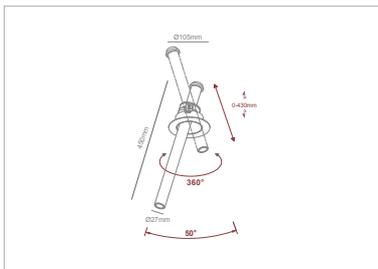

<b>Product Model No.</b>	AP-SPT701-7W	
<b>Packaging Detail</b>	62×50×50.5cm	
	STD PKG	20pcs
	N.W	11kgs
	G.W	13.5kgs

AP-SPT701-7W

DC8-12VDC7W LED 3000K/

PRI:270lm220-240/ incl.V~50/60 Hz 0.050A

Driver SEC: Constant Current: DC600mA



Warm White 3000K ∠ 18°

	1m	1396.80lx	35.63cm
	2m	349.20lx	71.25cm
	3m	155.20lx	106.88 cm
	4m	87.30lx	142.50 cm
	5m	55.87lx	178.13 cm
<b>cd</b>	<b>Height</b>	<b>illuminance</b>	<b>Diameter</b>

Especially designed for:

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.



Various Brand of COB LED Light Source:



RECESSED LED  
SPOT LIGHT

TECHNICAL SPECIFICATIONS

Input (Optional)	220-240V~50/60 Hz
Maximum Wattage	7W±10% Max

Number of LEDs	1 LED COB
----------------	-----------

Luminous Flux	270LM (3000K)
---------------	---------------

Main Material	Aluminum & PC Lens Diffuser
---------------	-----------------------------

Color Temperature	3000K / 4000K / 6500K
-------------------	-----------------------

CRI	≥80
-----	-----

Power Factor	≥0.8
--------------	------


Working Temperature	-10°C~45°C
---------------------	------------

Beam Angle (Optional)	18°
-----------------------	-----

Fixture Dimmable	Non-dimmable
------------------	--------------

Electrical	External Driver
------------	-----------------

Protection class	IP20
------------------	------

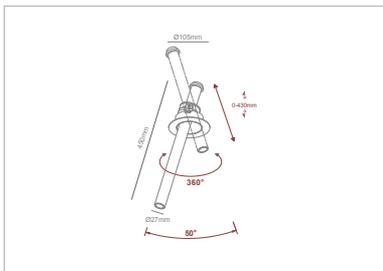

Product Model No.	AP-SPT701-7W	
Packaging Detail	62×26×70.5cm	
	STD PKG	10pcs
	N.W	6.5kgs
	G.W	9kgs

AP-SPT701-7W


DC8-12VDC7W LED 3000K/

PRI:270lm220-240/ incl.V~50/60 Hz 0.050A

Driver SEC: Constant Current: DC600mA



Warm White 3000K ∠ 18°

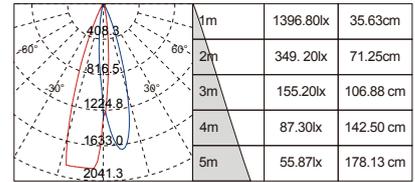

cd Height illuminance Diameter

Especially designed for:

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.



Various Brand of COB LED Light Source:



RECESSED LED  
SPOT LIGHT

TECHNICAL SPECIFICATIONS

**Input (Optional)** 220-240V~50/60 Hz  
**Maximum Wattage** 7W±10% Max

**Number of LEDs**  
1 LED COB

**Luminous Flux**  
270LM (3000K)

**Main Material**  
Aluminum & PC Lens Diffuser

**Color Temperature**  
3000K / 4000K / 6500K

**CRI** ≥80

**Power Factor** ≥0.8

**Working Temperature** -10°C~45°C

**Beam Angle (Optional)** 18°

**Fixture Dimmable** Non-dimmable

**Electrical** External Driver

**Protection class** IP20



<b>Product Model No.</b>	AP-SPT701-7W	
<b>Packaging Detail</b> 	62×62×30.5cm	
	STD PKG	25pcs
	N.W	13.4kgs
	G.W	15.7kgs

**AP-SPT701-7W**


DC8-12VDC7W LED 3000K/

PRI:270lm220-240/ incl.V~50/60 Hz 0.050A


Driver SEC: Constant Current: DC600mA



Warm White 3000K ∠ 18°

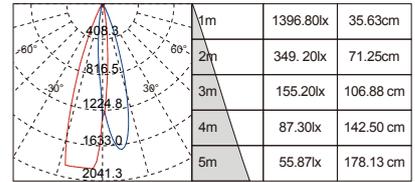

cd Height illuminance Diameter

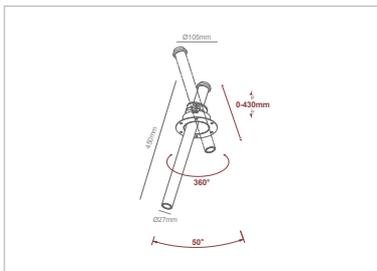

**Especially designed for:**

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.



**Various Brand of COB LED Light Source:**



RECESSED LED  
SPOT LIGHT

TECHNICAL SPECIFICATIONS

Input (Optional)	220-240V~50/60 Hz
Maximum Wattage	7W±10% Max

Number of LEDs	1 LED COB
----------------	-----------

Luminous Flux	270LM (3000K)
---------------	---------------

Main Material	Aluminum & PC Lens Diffuser
---------------	-----------------------------

Color Temperature	3000K / 4000K / 6500K
-------------------	-----------------------

CRI	≥80
-----	-----

Power Factor	≥0.8
--------------	------


Working Temperature	-10°C~45°C
---------------------	------------

Beam Angle (Optional)	18°
-----------------------	-----

Fixture Dimmable	Non-dimmable
------------------	--------------

Electrical	External Driver
------------	-----------------

Protection class	IP20
------------------	------

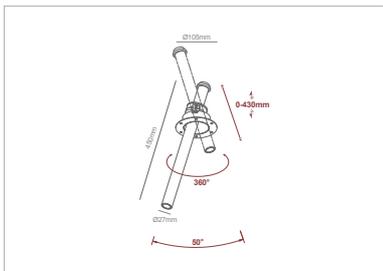

Product Model No.	AP-SPT701-7W	
Packaging Detail	62×50×50.5cm	
	STD PKG	20pcs
	N.W	13.06kgs
	G.W	15.7kgs

AP-SPT701-7W


DC8-12VDC7W LED 3000K/

PRI:270lm220-240/ incl.V~50/60 Hz 0.050A

Driver SEC: Constant Current: DC600mA



Warm White 3000K ∠ 18°

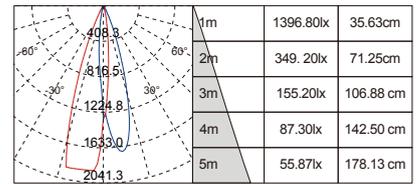

cd Height illuminance Diameter

Especially designed for:

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.



Various Brand of COB LED Light Source:





## ADJUSTABLE ANGLE SPOTLIGHT

LIGHT IS THE SOUL OF A SPACE  
NO MAIN LIGHT HAS BECOME THE MAINSTREAM

+  
**MODERN.**

Simple classic  
High appearance value

|||  
SIX BIG ADVANTAGE

**Deductive**

**Nordic aesthetics  
Modern**



**Taste of  
choice**



**Taste of choice**

**New Vision**

-

**Nordic aesthetics**



S P A C E S T Y L E

## NO MAIN LIGHT

### HERO SERIES

Draw the outline of lines  
to create three-dimensional  
sense, improve the space style





## EXPOSED SPOTLIGHTS

Simple personality, adjustable lighting direction, suitable for many scenes.

Open folding spotlight



Creative spotlight



Patented product



CLEAR MOUNTED LIGHT



Green, healthy and energy saving

High color rendering > 90  
No opening



*True light and color, return to true life*



Easy to install

Durable and anodized



Product series

AP-MZ-0010A-7W



SURFACE LED  
CEILING LIGHT

TECHNICAL SPECIFICATIONS

Input (Optional)	220-240V~50/60 Hz
Maximum Wattage	7W±10% Max

Number of LEDs	1 LED COB
----------------	-----------

Luminous Flux	476LM (3000K)
---------------	---------------

Main Material	Aluminum & PC Lens Diffuser
---------------	-----------------------------

Color Temperature	3000K / 4000K / 6500K
-------------------	-----------------------

CRI	≥90
-----	-----

Power Factor	≥0.8
--------------	------


Working Temperature	-10°C~45°C
---------------------	------------

Beam Angle (Optional)	45°
-----------------------	-----

Fixture Dimmable	Non-dimmable
------------------	--------------

Electrical	Internal Driver
------------	-----------------

Protection class	IP20
------------------	------

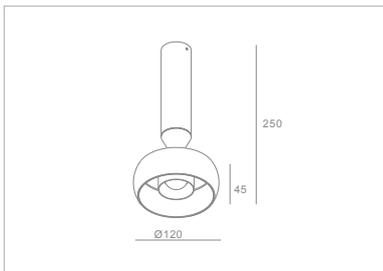

Especially designed for:

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.



Product Model No.	AP-MZ-0010A-7W	
Packaging Detail	64×48.5×31.5cm	
	STD PKG	12pcs
	N.W	6.12kgs
	G.W	8.8kgs


AP-MZ-0010A-7W

DC30-42VDC7W LED 3000K/

PRI:476lm220-240/ incl. -V~ 50/60 Hz 0.050A  
Driver SEC: Constant Current: DC170mA



Warm White 3000K ∠45°

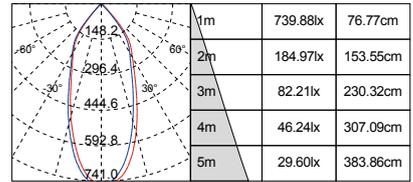

cd Height illuminance Diameter

Option colors



Various Brand of COB LED Light Source:



SURFACE LED  
CEILING LIGHT

TECHNICAL SPECIFICATIONS

Input (Optional)	220-240V~50/60 Hz
Maximum Wattage	7W±10% Max

Number of LEDs	1 LED COB
----------------	-----------

Luminous Flux	476LM (3000K)
---------------	---------------

Main Material	Aluminum & PC Lens Diffuser
---------------	-----------------------------

Color Temperature	3000K / 4000K / 6500K
-------------------	-----------------------

CRI	≥90
-----	-----

Power Factor	≥0.8
--------------	------


Working Temperature	-10°C~45°C
---------------------	------------

Beam Angle (Optional)	45°
-----------------------	-----

Fixture Dimmable	Non-dimmable
------------------	--------------

Electrical	Internal Driver
------------	-----------------

Protection class	IP20
------------------	------

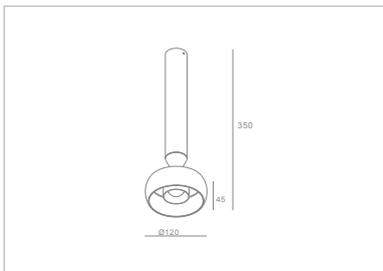

Especially designed for:

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.



Product Model No.	AP-MZ-0011A-7W	
Packaging Detail	64×48.5×41.5cm	
	STD PKG	12pcs
	N.W	7.08kgs
	G.W	10.51kgs

AP-MZ-0011A-7W


DC30-42VDC7W LED 3000K/

PRI:476lm220-240/ incl. -V~ 50/60 Hz 0.050A

Driver SEC: Constant Current: DC170mA



Warm White 3000K ∠45°

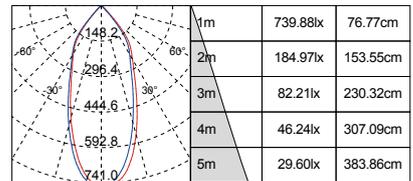

cd Height illuminance Diameter

Option colors



Various Brand of COB LED Light Source:



Product series

**AP-MZ-0014A-7W**



SURFACE LED  
CEILING LIGHT

TECHNICAL SPECIFICATIONS

Input (Optional)	220-240V~50/60 Hz
Maximum Wattage	7W±10% Max

Number of LEDs	1 LEDs COB
----------------	------------

Luminous Flux	476LM (3000K)
---------------	---------------

Main Material	Aluminum & PC Lens Diffuser
---------------	-----------------------------

Color Temperature	3000K / 4000K / 6500K
-------------------	-----------------------

CRI	≥90
-----	-----

Power Factor	≥0.8
--------------	------


Working Temperature	-10°C~45°C
---------------------	------------

Beam Angle (Optional)	45°
-----------------------	-----

Fixture Dimmable	Non-dimmable
------------------	--------------

Electrical	Internal Driver
------------	-----------------

Protection class	IP20
------------------	------

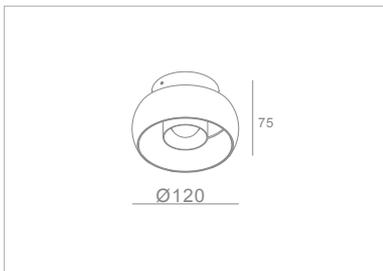

Especially designed for:

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.



Product Model No.	AP-MZ-0014A-7W	
Packaging Detail 	33×32.5×35cm	
	STD PKG	12pcs
	N.W	4.91kgs
	G.W	6.28kgs

AP-MZ-0014A-7W


DC170mA7W LED 3000KDC30-42VDC476lm / incl./

PRI:-220-240 V~ 50/60 Hz 0.050A

ELECTRONIC Driver SEC: Constant Current:



Warm White 3000K ∠45°

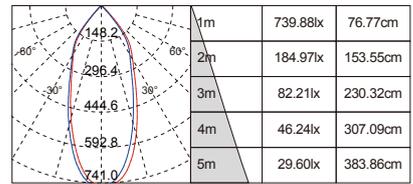

cd Height illuminance Diameter

Option colors




Various Brand of COB LED Light Source:



Product series

**AP-MZ-0020A-10W**



SURFACE LED  
CEILING LIGHT

TECHNICAL SPECIFICATIONS

Input (Optional)	220-240V~50/60 Hz
Maximum Wattage	10W±10% Max

Number of LEDs	120 LEDs SMD
----------------	--------------

Luminous Flux	883LM (3000K)
---------------	---------------

Main Material	Aluminum & PC
---------------	---------------

Color Temperature	3000K / 4000K / 6500K
-------------------	-----------------------

CRI	≥90
-----	-----

Power Factor	≥0.92
--------------	-------


Working Temperature	-10°C~45°C
---------------------	------------

Beam Angle (Optional)	110°
-----------------------	------

Fixture Dimmable	Non-dimmable
------------------	--------------

Electrical	Internal Driver
------------	-----------------

Protection class	IP20
------------------	------

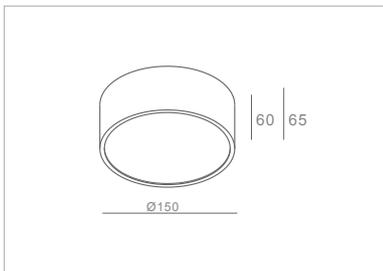

Especially designed for:

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.




Product Model No.	AP-MZ-0020A-10W	
Packaging Detail	62×62×30.5cm	
	STD PKG	25pcs
	N.W	11kgs
	G.W	13.5kgs

AP-MZ-0020A-10W

10W LED 3000K 883lm / incl. MEGALUX Driver SEC: Constant Current: DC250mA DC30-42V DC / PRI: 220-240 V~ 50/60 Hz 0.065A



Warm White 3000K ∠110°

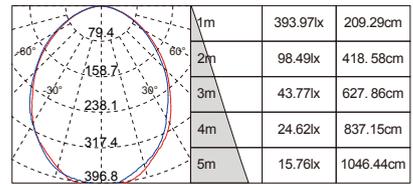

cd Height illuminance Diameter

Option colors



Various Brand of SMD LED Light Source:



SURFACE LED  
CEILING LIGHT

TECHNICAL SPECIFICATIONS

Input (Optional)	220-240V~50/60 Hz
Maximum Wattage	20W±10% Max

Number of LEDs	288 LEDs SMD
----------------	--------------

Luminous Flux	1982LM (3000K)
---------------	----------------

Main Material	Aluminum & PC
---------------	---------------

Color Temperature	3000K / 4000K / 6500K
-------------------	-----------------------

CRI	≥90
-----	-----

Power Factor	≥0.92
--------------	-------


Working Temperature	-10°C~45°C
---------------------	------------

Beam Angle (Optional)	110°
-----------------------	------

Fixture Dimmable	Non-dimmable
------------------	--------------

Electrical	Internal Driver
------------	-----------------

Protection class	IP20
------------------	------

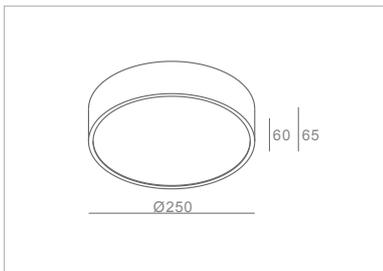

Especially designed for:

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.




Product Model No.	AP-MZ-0021A-20W	
Packaging Detail	62×62×30.5cm	
	STD PKG	25pcs
	N.W	11kgs
	G.W	13.5kgs

AP-MZ-0021A-20W

20W LED 3000K 1982lm / incl. MEGALUX Driver SEC: Constant Current: DC500mA DC27-42V DC / PRI: 220-240 V~ 50/60 Hz 0.120A



Warm White 3000K ∠110°

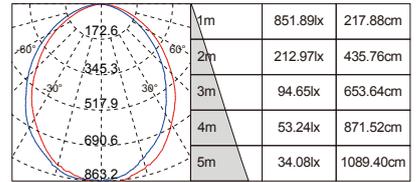

cd Height illuminance Diameter

Option colors



Various Brand of SMD LED Light Source:



SURFACE LED  
CEILING LIGHT

TECHNICAL SPECIFICATIONS

Input (Optional)	220-240V~50/60 Hz
Maximum Wattage	30W±10% Max

Number of LEDs	480 LEDs SMD
----------------	--------------

Luminous Flux	3735LM (3000K)
---------------	----------------

Main Material	Aluminum & PC
---------------	---------------

Color Temperature	3000K / 4000K / 6500K
-------------------	-----------------------

CRI	≥90
-----	-----

Power Factor	≥0.92
--------------	-------


Working Temperature	-10°C~45°C
---------------------	------------

Beam Angle (Optional)	110°
-----------------------	------

Fixture Dimmable	Non-dimmable
------------------	--------------

Electrical	Internal Driver
------------	-----------------

Protection class	IP20
------------------	------

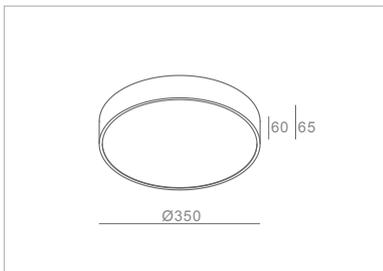

Product Model No.	AP-MZ-0022A-30W	
Packaging Detail	62×62×30.5cm	
	STD PKG	25pcs
	N.W	11kgs
	G.W	13.5kgs

**AP-MZ-0022A-30W**

30W LED 3000K 3735lm / incl. MEGALUX Driver SEC: Constant Current: DC750mA  
DC30-42V DC / PRI: 220-240 V~ 50/60 Hz 0.170A



Warm White 3000K ∠110°

	1m	1333.90lx	282.47cm
	2m	333.48lx	564.94cm
	3m	148.21lx	847.41cm
	4m	83.37lx	847.41cm
	5m	53.36lx	1412.35cm
	cd	Height	illuminance

**Option colors**



**Especially designed for:**

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.



**Various Brand of SMD LED Light Source:**



Product series

# AP-MZ-0040A-10W



SURFACE LED  
CEILING LIGHT

TECHNICAL SPECIFICATIONS

<b>Input (Optional)</b>	220-240V~50/60 Hz
<b>Maximum Wattage</b>	10W±10% Max

<b>Number of LEDs</b>	120 LEDs SMD
-----------------------	--------------

<b>Luminous Flux</b>	883LM (3000K)
----------------------	---------------

<b>Main Material</b>	Aluminum & PC
----------------------	---------------

<b>Color Temperature</b>	3000K / 4000K / 6500K
--------------------------	-----------------------

<b>CRI</b>	≥90
------------	-----

<b>Power Factor</b>	≥0.92
---------------------	-------


<b>Working Temperature</b>	-10°C~45°C
----------------------------	------------

<b>Beam Angle (Optional)</b>	110°
------------------------------	------

<b>Fixture Dimmable</b>	Non-dimmable
-------------------------	--------------


<b>Electrical</b>	Internal Driver
-------------------	-----------------

<b>Protection class</b>	IP20
-------------------------	------

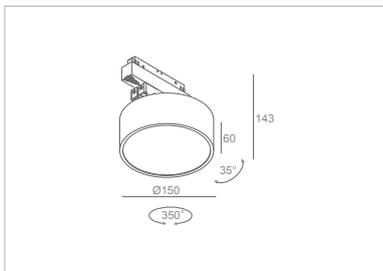

**Especially designed for:**

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.

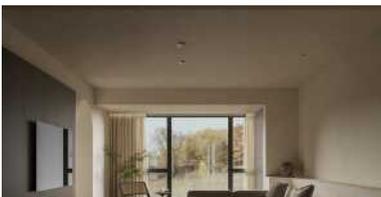


<b>Product Model No.</b>	AP-MZ-0040A-10W	
<b>Packaging Detail</b> 	40×40×32cm	
	STD PKG	8pcs
	N.W	4.37kgs
	G.W	6.37kgs

**AP-MZ-0040A-10W**

10W LED 3000K 883lm / incl. MEGALUX Driver SEC: Constant Current: DC250mA DC30-42V DC / PRI: 220-240 V~ 50/60 Hz 0.065A



Warm White 3000K ∠110°

	1m	393.97lx	209.29cm
	2m	98.49lx	418.58cm
	3m	43.77lx	627.86cm
	4m	24.62lx	837.15cm
	5m	15.76lx	1046.44cm
	cd	Height	illuminance

**Option colors**




**Various Brand of SMD LED Light Source:**



SURFACE LED  
CEILING LIGHT

TECHNICAL SPECIFICATIONS	
<b>Input (Optional)</b>	220-240V~50/60 Hz
<b>Maximum Wattage</b>	20W±10% Max
<b>Number of LEDs</b>	
288 LEDs SMD	
<b>Luminous Flux</b>	
1982LM (3000K)	
<b>Main Material</b>	
Aluminum & PC	
<b>Color Temperature</b>	
3000K / 4000K / 6500K	

<b>CRI</b>	≥90
<b>Power Factor</b>	≥0.92
<b>Working Temperature</b>	-10°C~45°C
<b>Beam Angle (Optional)</b>	110°
<b>Fixture Dimmable</b>	Non-dimmable
<b>Electrical</b>	Internal Driver
<b>Protection class</b>	IP20

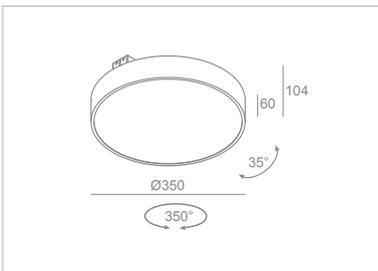

**Especially designed for:**

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.




<b>Product Model No.</b>	AP-MZ-0041A-20W	
<b>Packaging Detail</b>	31.5×31.5×41.5cm	
	STD PKG	3pcs
	N.W	11kgs
	G.W	13.5kgs

**AP-MZ-0041A-20W**

20W LED 3000K 1982lm / incl. MEGALUX Driver SEC: Constant Current: DC500mA  
DC27-42V DC / PRI: 220-240 V~ 50/60 Hz 0.120A



Warm White 3000K ∠110°

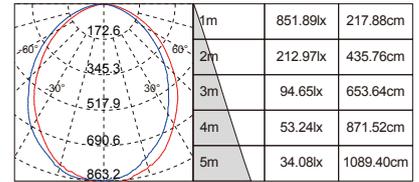

cd      Height      illuminance      Diameter

**Option colors**



**Various Brand of SMD LED Light Source:**



SURFACE LED  
CEILING LIGHT

TECHNICAL SPECIFICATIONS

<b>Input (Optional)</b>	220-240V~50/60 Hz
<b>Maximum Wattage</b>	30W±10% Max

<b>Number of LEDs</b>	480 LEDs SMD
-----------------------	--------------

<b>Luminous Flux</b>	3735LM (3000K)
----------------------	----------------

<b>Main Material</b>	Aluminum & PC
----------------------	---------------

<b>Color Temperature</b>	3000K / 4000K / 6500K
--------------------------	-----------------------

<b>CRI</b>	≥90
------------	-----

<b>Power Factor</b>	≥0.92
---------------------	-------


<b>Working Temperature</b>	-10°C~45°C
----------------------------	------------

<b>Beam Angle (Optional)</b>	110°
------------------------------	------

<b>Fixture Dimmable</b>	Non-dimmable
-------------------------	--------------

<b>Electrical</b>	Internal Driver
-------------------	-----------------

<b>Protection class</b>	IP20
-------------------------	------

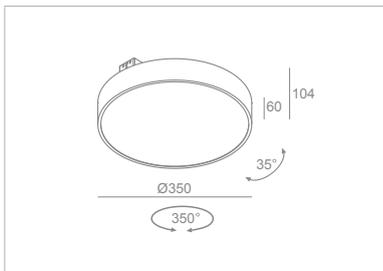

Especially designed for:

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.




<b>Product Model No.</b>	AP-MZ-0042A-30W	
<b>Packaging Detail</b>	41.5×41.5×41.5cm	
	STD PKG	3pcs
	N.W	11kgs
	G.W	13.5kgs

AP-MZ-0042A-30W

30W LED 3000K 3735lm / incl. MEGALUX Driver SEC: Constant Current: DC750mA DC30-42V DC / PRI: 220-240 V~ 50/60 Hz 0.170A



Warm White 3000K ∠110°

	1m	1333.90lx	282.47cm
	2m	333.48lx	564.94cm
	3m	148.21lx	847.41cm
	4m	83.37lx	847.41cm
	5m	53.36lx	1412.35cm
cd	Height	illuminance	Diameter

Option colors



Various Brand of SMD LED Light Source:



Product series

**AP-MZ-0060A-3W**



SURFACE LED  
CEILING LIGHT

TECHNICAL SPECIFICATIONS

Input (Optional)	220-240V~50/60 Hz
Maximum Wattage	3W±10% Max

Number of LEDs	1 LED COB
----------------	-----------

Luminous Flux	111LM (3000K)
---------------	---------------

Main Material	Aluminum & PC Lens Diffuser
---------------	-----------------------------

Color Temperature	3000K
-------------------	-------

CRI	≥90
-----	-----

Power Factor	≥0.8
--------------	------


Working Temperature	-10°C~45°C
---------------------	------------

Beam Angle (Optional)	8°
-----------------------	----

Fixture Dimmable	Non-dimmable
------------------	--------------

Electrical	Internal Driver
------------	-----------------

Protection class	IP20
------------------	------

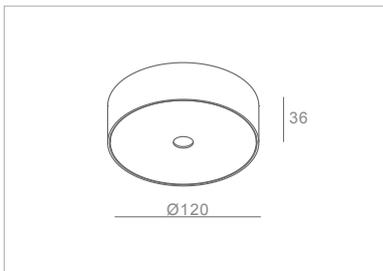

**Especially designed for:**

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.



Product Model No.	AP-MZ-0060A-3W	
Packaging Detail	31×31×32.5cm	
	STD PKG	20pcs
	N.W	7.96kgs
	G.W	8.85kgs

**AP-MZ-0060A-3W**


DC3-6VDC3W LED 3000K/

PRI:111lm220-240/ incl.V~50/60 Hz 0.030A

Driver SEC: Constant Current: DC600mA



Warm White 3000K ∠8°

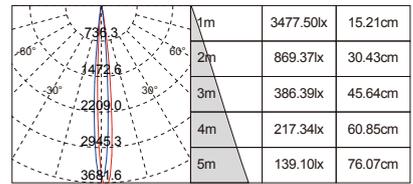

cd Height illuminance Diameter

**Option colors**



**Various Brand of COB LED Light Source:**



Product series

**AP-MZ-0061A-7W**



SURFACE LED  
CEILING LIGHT

TECHNICAL SPECIFICATIONS

Input (Optional)	220-240V~50/60 Hz
Maximum Wattage	7W±10% Max

Number of LEDs	3 LEDs COB
----------------	------------

Luminous Flux	343LM (3000K)
---------------	---------------

Main Material	Aluminum & PC Lens Diffuser
---------------	-----------------------------

Color Temperature	3000K
-------------------	-------

CRI	≥90
-----	-----

Power Factor	≥0.8
--------------	------


Working Temperature	-10°C~45°C
---------------------	------------

Beam Angle (Optional)	8°
-----------------------	----

Fixture Dimmable	Non-dimmable
------------------	--------------

Electrical	Internal Driver
------------	-----------------

Protection class	IP20
------------------	------

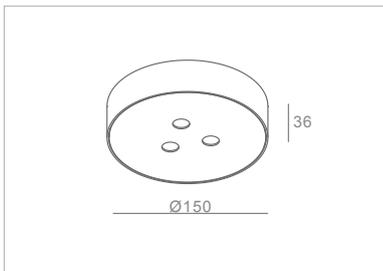

Especially designed for:

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.



Product Model No.	AP-MZ-0061A-7W	
Packaging Detail	37×37×32.5cm	
	STD PKG	20pcs
	N.W	12.24kgs
	G.W	14.16kgs

AP-MZ-0061A-7W


DC8-12VDC7W LED 3000K/

PRI:343lm220-240/ incl.V~50/60 Hz 0.050A

Driver SEC: Constant Current: DC600mA



Warm White 3000K ∠8°

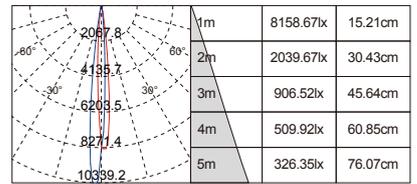

cd Height illuminance Diameter

Option colors



Various Brand of COB LED Light Source:



Product series

# AP-MZ-0070A-7W



SURFACE LED  
CEILING LIGHT

TECHNICAL SPECIFICATIONS

Input (Optional)	220-240V~50/60 Hz
Maximum Wattage	7W±10% Max

Number of LEDs	1 LED COB
----------------	-----------

Luminous Flux	528LM (3000K)
---------------	---------------

Main Material	Aluminum & PC Lens Diffuser
---------------	-----------------------------

Color Temperature	3000K / 4000K / 6500K
-------------------	-----------------------

CRI	≥90
-----	-----


Power Factor	≥0.8
--------------	------

Working Temperature	-10°C~45°C
---------------------	------------

Beam Angle (Optional)	24°
-----------------------	-----

Fixture Dimmable	Non-dimmable
------------------	--------------

Electrical	Internal Driver
Protection class	IP20

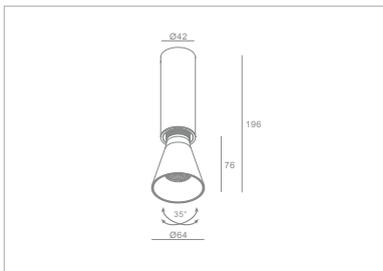

Especially designed for:

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.



Product Model No.	AP-MZ-0070A-7W	
Packaging Detail	55.5×33.5×51cm	
	STD PKG	30pcs
	N.W	8.31kgs
	G.W	11.31kgs

AP-MZ-0070A-7W


DC30-42VDC7W LED 3000K/

PRI:528lm220-240/ incl. -V~ 50/60 Hz 0.050A

Driver SEC: Constant Current: DC170mA



Warm White 3000K ∠24°

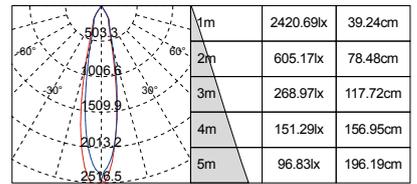

cd Height illuminance Diameter

Option colors



Various Brand of COB LED Light Source:



Product series

# AP-MZ-0071A-7W



SURFACE LED  
CEILING LIGHT

TECHNICAL SPECIFICATIONS

Input (Optional)	220-240V~50/60 Hz
Maximum Wattage	7W±10% Max

Number of LEDs	1 LED COB
----------------	-----------

Luminous Flux	528LM (3000K)
---------------	---------------

Main Material	Aluminum & PC Lens Diffuser
---------------	-----------------------------

Color Temperature	3000K / 4000K / 6500K
-------------------	-----------------------

CRI	≥90
-----	-----

Power Factor	≥0.92
--------------	-------


Working Temperature	-10°C~45°C
---------------------	------------

Beam Angle (Optional)	24°
-----------------------	-----

Fixture Dimmable	Non-dimmable
------------------	--------------

Electrical	Internal Driver
------------	-----------------

Protection class	IP20
------------------	------

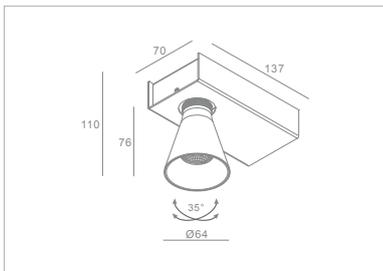

**Especially designed for:**

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.




Product Model No.	AP-MZ-0071A-7W	
Packaging Detail	60×39.5×33cm	
	STD PKG	20pcs
	N.W	11.22kgs
	G.W	14.22kgs

**AP-MZ-0070A-7W**

DC30-42VDC7W LED 3000K/  
PRI:528lm220-240/ incl. -V~ 50/60 Hz 0.050A



Warm White 3000K ∠ 24°

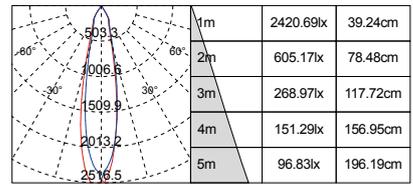

cd Height illuminance Diameter

**Option colors**



**Various Brand of COB LED Light Source:**



SURFACE LED  
CEILING LIGHT

TECHNICAL SPECIFICATIONS

Input (Optional)	220-240V~50/60 Hz
Maximum Wattage	2x7W±10% Max

Number of LEDs	2 LEDs COB
----------------	------------

Luminous Flux	1092LM (3000K)
---------------	----------------

Main Material	Aluminum & PC Lens Diffuser
---------------	-----------------------------

Color Temperature	3000K / 4000K / 6500K
-------------------	-----------------------

CRI	≥90
-----	-----


Power Factor	≥0.92
--------------	-------

Working Temperature	-10°C~45°C
---------------------	------------

Beam Angle (Optional)	24°
-----------------------	-----

Fixture Dimmable	Non-dimmable
------------------	--------------

Electrical	Internal Driver
Protection class	IP20

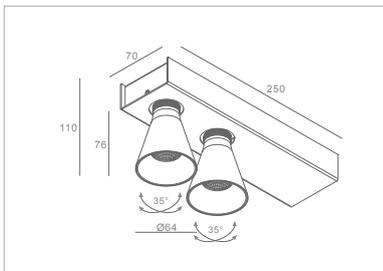

Especially designed for:

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.



Product Model No.	AP-MZ-0071A-2x7W	
Packaging Detail	62×36.5×33cm	
	STD PKG	12pcs
	N.W	12.06kgs
	G.W	15.06kgs


AP-MZ-0071A-2x7W

DC30-42VDC7W LED 3000K/

PRI:1092lm220-240V~/ incl. -50/60 Hz 0.088A  
Driver SEC: Constant Current: DC360mA



Warm White 3000K ∠ 24°

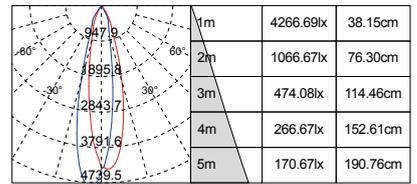

cd Height illuminance Diameter

Option colors



Various Brand of COB LED Light Source:



SURFACE LED  
CEILING LIGHT

TECHNICAL SPECIFICATIONS

Input (Optional)	220-240V~50/60 Hz
Maximum Wattage	3x7W±10% Max

Number of LEDs	3 LEDs COB
----------------	------------

Luminous Flux	1510LM (3000K)
---------------	----------------

Main Material	Aluminum & PC Lens Diffuser
---------------	-----------------------------

Color Temperature	3000K / 4000K / 6500K
-------------------	-----------------------

CRI	≥90
-----	-----

Power Factor	≥0.92
--------------	-------


Working Temperature	-10°C~45°C
---------------------	------------

Beam Angle (Optional)	24°
-----------------------	-----

Fixture Dimmable	Non-dimmable
------------------	--------------

Electrical	Internal Driver
------------	-----------------

Protection class	IP20
------------------	------

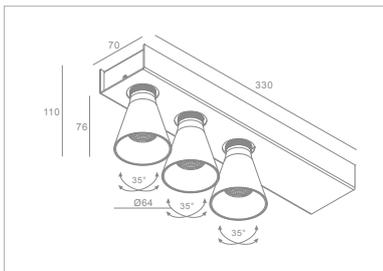

**Especially designed for:**

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.



Product Model No.	AP-MZ-0072A-3x7W	
Packaging Detail	48.5×39.5×33cm	
	STD PKG	8pcs
	N.W	8.04kgs
	G.W	11.04kgs


**AP-MZ-0072A-3x7W**

DC30-42VDC21W LED 3000K/ PRI:1510lm220-240V~/ incl. -50/60 Hz 0.120A

Driver SEC: Constant Current: DC500mA



Warm White 3000K ∠ 24°

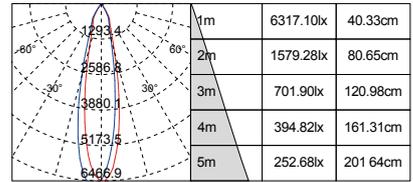

cd Height illuminance Diameter

**Option colors**



**Various Brand of COB LED Light Source:**



Product series


# AP-MZ-0100A-7W



SURFACE LED  
CEILING LIGHT

TECHNICAL SPECIFICATIONS

<b>Input (Optional)</b>	220-240V~50/60 Hz
<b>Maximum Wattage</b>	7W±10% Max
<b>Number of LEDs</b>	1 LED COB
<b>Luminous Flux</b>	476LM (3000K)
<b>Main Material</b>	Aluminum & PC Lens Diffuser
<b>Color Temperature</b>	3000K / 4000K / 6500K
<b>CRI</b>	≥90
<b>Power Factor</b>	≥0.8
<b>Working Temperature</b>	-10°C~45°C
<b>Beam Angle (Optional)</b>	24°
<b>Fixture Dimmable</b>	Non-dimmable
<b>Electrical</b>	Internal Driver
<b>Protection class</b>	IP20

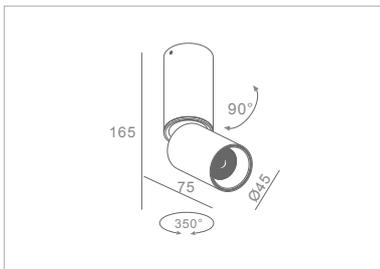

**Especially designed for:**

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.




<b>Product Model No.</b>	AP-MZ-0100A-7W	
<b>Packaging Detail</b>	37×24×24.5cm	
	STD PKG	32pcs
	N.W	6.66kgs
	G.W	8.7kgs

**AP-MZ-0100A-7W**

DC30-42VDC7W  
LED 3000K/ PRI:476lm220-240/ incl. -V~ 50/60  
Hz 0.050A



Warm White 3000K ∠ 24°

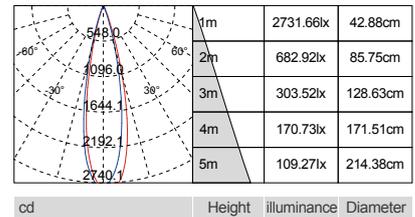

**Option colors**



**Various Brand of COB LED Light Source:**



SURFACE LED  
CEILING LIGHT

TECHNICAL SPECIFICATIONS

Input (Optional)	220-240V~50/60 Hz
Maximum Wattage	7W±10% Max

Number of LEDs	1 LED COB
----------------	-----------

Luminous Flux	476LM (3000K)
---------------	---------------

Main Material	Aluminum & PC Lens Diffuser
---------------	-----------------------------

Color Temperature	3000K / 4000K / 6500K
-------------------	-----------------------

CRI	≥90
-----	-----


Power Factor	≥0.8
--------------	------

Working Temperature	-10°C~45°C
---------------------	------------

Beam Angle (Optional)	24°
-----------------------	-----

Fixture Dimmable	Non-dimmable
------------------	--------------

Electrical	Internal Driver
Protection class	IP20

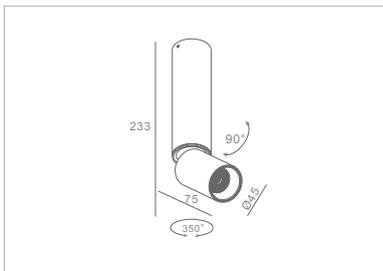

Especially designed for:

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.



Product Model No.	AP-MZ-0101A-7W	
Packaging Detail	30×26×30cm	
	STD PKG	25pcs
	N.W	11.65kgs
	G.W	13.6kgs

AP-MZ-0101A-7W

DC30-42VDC7W LED 3000K/

PRI:476lm220-240/ incl. -V~ 50/60 Hz 0.050A



Warm White 3000K ∠ 24°

	1m	2731.66lx	42.88cm
	2m	682.92lx	85.75cm
	3m	303.52lx	128.63cm
	4m	170.73lx	171.51cm
	5m	109.27lx	214.38cm
cd	Height	illuminance	Diameter

Option colors



Various Brand of COB LED Light Source:



SURFACE LED  
CEILING LIGHT

TECHNICAL SPECIFICATIONS

Input (Optional)	220-240V~50/60 Hz
Maximum Wattage	7W±10% Max

Number of LEDs	1 LED COB
----------------	-----------

Luminous Flux	476LM (3000K)
---------------	---------------

Main Material	Aluminum & PC Lens Diffuser
---------------	-----------------------------

Color Temperature	3000K / 4000K / 6500K
-------------------	-----------------------

CRI	≥90
-----	-----

Power Factor	≥0.8
--------------	------


Working Temperature	-10°C~45°C
---------------------	------------

Beam Angle (Optional)	24°
-----------------------	-----

Fixture Dimmable	Non-dimmable
------------------	--------------

Electrical	Internal Driver
------------	-----------------

Protection class	IP20
------------------	------

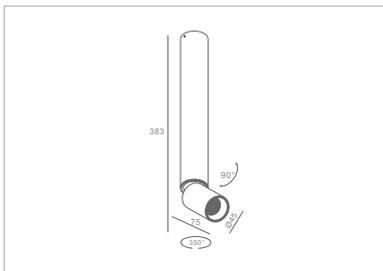

**Especially designed for:**

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.



Product Model No.	AP-MZ-0102A-7W	
Packaging Detail 	41x29.5x24cm	
	STD PKG	20pcs
	N.W	9.73kgs
	G.W	12.73kgs


**AP-MZ-0102A-7W**

DC30-42VDC7W LED 3000K/

PRI:476lm220-240/ incl. -V~ 50/60 Hz 0.050A



Warm White 3000K ∠ 24°

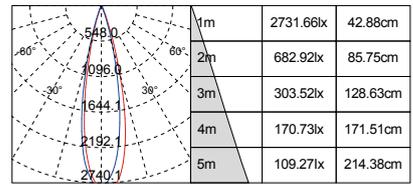

cd      Height      illuminance      Diameter

**Option colors**



**Various Brand of COB LED Light Source:**



SURFACE LED  
CEILING LIGHT

TECHNICAL SPECIFICATIONS

<b>Input (Optional)</b>	220-240V~50/60 Hz
<b>Maximum Wattage</b>	15W±10% Max

<b>Number of LEDs</b>	1 LED COB
-----------------------	-----------

<b>Luminous Flux</b>	867LM (3000K)
----------------------	---------------

<b>Main Material</b>	Aluminum & PC Lens Diffuser
----------------------	-----------------------------

<b>Color Temperature</b>	3000K / 4000K / 6500K
--------------------------	-----------------------

<b>CRI</b>	≥90
------------	-----

<b>Power Factor</b>	≥0.92
---------------------	-------


<b>Working Temperature</b>	-10°C~45°C
----------------------------	------------

<b>Beam Angle (Optional)</b>	24°
------------------------------	-----

<b>Fixture Dimmable</b>	Non-dimmable
-------------------------	--------------

<b>Electrical</b>	Internal Driver
-------------------	-----------------

<b>Protection class</b>	IP20
-------------------------	------

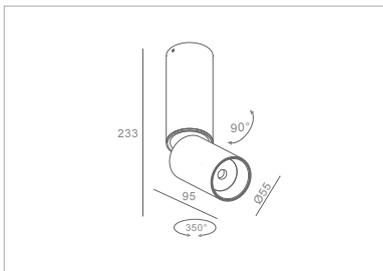

**Especially designed for:**

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.




<b>Product Model No.</b>	AP-MZ-0103A-15W	
<b>Packaging Detail</b> 	50.5x28x21.5cm	
	STD PKG	24pcs
	N.W	6.66kgs
	G.W	8.7kgs

**AP-MZ-0103A-15W**

DC360mA/450mA15W LED 3000K 867lmDC30-42VDC/ incl. -/  
PRI: 220-240 V~ 50/60 Hz 0.088A



Warm White 3000K ∠ 24°

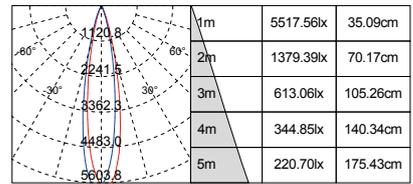

cd      Height      illuminance      Diameter

**Option colors**



**Various Brand of COB LED Light Source:**



Product series

# AP-MZ-0106A-7W



SURFACE LED  
CEILING LIGHT

TECHNICAL SPECIFICATIONS

Input (Optional)	220-240V~50/60 Hz
Maximum Wattage	7W±10% Max

Number of LEDs	1 LEDs COB
----------------	------------

Luminous Flux	476LM (3000K)
---------------	---------------

Main Material	Aluminum & PC Lens Diffuser
---------------	-----------------------------

Color Temperature	3000K / 4000K / 6500K
-------------------	-----------------------

CRI	≥90
-----	-----

Power Factor	≥0.5
--------------	------


Working Temperature	-10°C~45°C
---------------------	------------

Beam Angle (Optional)	24°
-----------------------	-----

Fixture Dimmable	Non-dimmable
------------------	--------------

Electrical	Internal Driver
------------	-----------------

Protection class	IP20
------------------	------

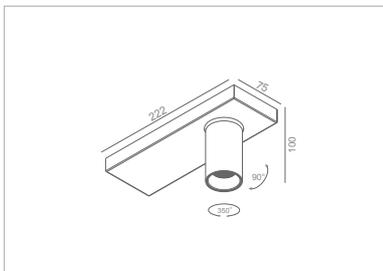

Especially designed for:

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.



Product Model No.	AP-MZ-0106A-7W	
Packaging Detail	52×33.5×40cm	
	STD PKG	18pcs
	N.W	10.66kgs
	G.W	12.66kgs


AP-MZ-0106A-7W  
DC18V7W LEDDC3000K/

PRI:476lm220-240/ incl.V~50/60 Hz 0.01A

Driver SEC: Constant Current: DC300mA



Warm White 3000K ∠ 24°

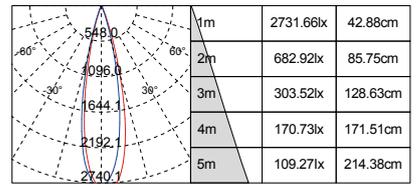

cd Height illuminance Diameter

Option colors



Various Brand of COB LED Light Source:



SURFACE LED  
CEILING LIGHT

TECHNICAL SPECIFICATIONS

Input (Optional)	220-240V~50/60 Hz
Maximum Wattage	15W±10% Max

Number of LEDs	1 LEDs COB
----------------	------------

Luminous Flux	867LM (3000K)
---------------	---------------

Main Material	Aluminum & PC Lens Diffuser
---------------	-----------------------------

Color Temperature	3000K / 4000K / 6500K
-------------------	-----------------------

CRI	≥90
-----	-----


Power Factor	≥0.5
--------------	------

Working Temperature	-10°C~45°C
---------------------	------------

Beam Angle (Optional)	24°
-----------------------	-----

Fixture Dimmable	Non-dimmable
------------------	--------------

Electrical	Internal Driver
Protection class	IP20

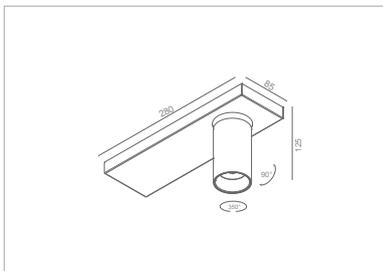

Especially designed for:

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.



Product Model No.	AP-MZ-0108A-15W	
Packaging Detail	64×36.5×47.5cm	
	STD PKG	18pcs
	N.W	15.3kgs
	G.W	17.3kgs


AP-MZ-0108A-15W

DC36V15W LEDDC3000K/ PRI: 867lm220-240/ incl.V~ 50/60-Hz 0.18A

Driver SEC: Constant Current: DC350mA



Warm White 3000K ∠ 24°

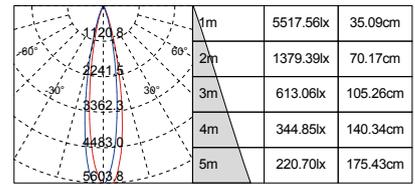

cd Height illuminance Diameter

Option colors



Various Brand of COB LED Light Source:



Product series

# AP-MZ-0107A-14W



SURFACE LED  
CEILING LIGHT

TECHNICAL SPECIFICATIONS

Input (Optional)	220-240V~50/60 Hz
Maximum Wattage	14W±10% Max

Number of LEDs	2 LEDs COB
----------------	------------

Luminous Flux	952LM (3000K)
---------------	---------------

Main Material	Aluminum & PC Lens Diffuser
---------------	-----------------------------

Color Temperature	3000K / 4000K / 6500K
-------------------	-----------------------

CRI	≥90
-----	-----

Power Factor	≥0.5
--------------	------


Working Temperature	-10°C~45°C
---------------------	------------

Beam Angle (Optional)	24°
-----------------------	-----

Fixture Dimmable	Non-dimmable
------------------	--------------

Electrical	Internal Driver
------------	-----------------

Protection class	IP20
------------------	------

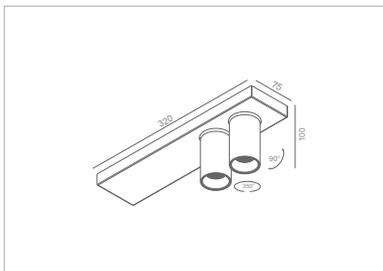

**Especially designed for:**

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.




Product Model No.	AP-MZ-0107A-14W	
Packaging Detail	44.5×36.5×40cm	
	STD PKG	12pcs
	N.W	11.09kgs
	G.W	13.09kgs

## AP-MZ-0107A-14W

PRI: 952lm220-240/ incl.V~ -50/60DriverHzSEC:0.18AConstant  
Current: DC350mA



Warm White 3000K ∠ 24°

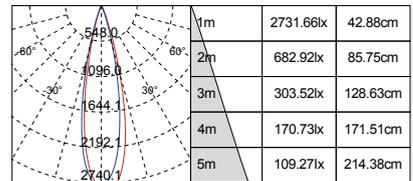

cd Height illuminance Diameter

### Option colors



### Various Brand of COB LED Light Source:



SURFACE LED  
CEILING LIGHT

TECHNICAL SPECIFICATIONS

Input (Optional)	220-240V~50/60 Hz
Maximum Wattage	30W±10% Max

Number of LEDs	2 LEDs COB
----------------	------------

Luminous Flux	1734LM (3000K)
---------------	----------------

Main Material	Aluminum & PC Lens Diffuser
---------------	-----------------------------

Color Temperature	3000K / 4000K / 6500K
-------------------	-----------------------

CRI	≥90
-----	-----

Power Factor	≥0.9
--------------	------


Working Temperature	-10°C~45°C
---------------------	------------

Beam Angle (Optional)	24°
-----------------------	-----

Fixture Dimmable	Non-dimmable
------------------	--------------

Electrical	Internal Driver
------------	-----------------

Protection class	IP20
------------------	------

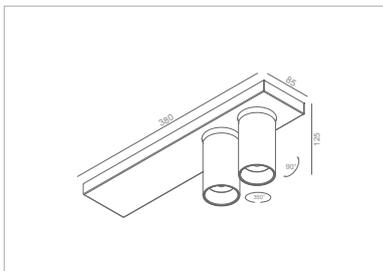

Especially designed for:

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.




Product Model No.	AP-MZ-0109A-30W	
Packaging Detail	48.5×42.5×47.5cm	
	STD PKG	12pcs
	N.W	13.61kgs
	G.W	15.61kgs

AP-MZ-0109A-30W

DC36V30W LEDDC3000K/ PRI: 1734lm220-240/ V~incl.50/60-Hz 0.36A  
Driver SEC: Constant Current: DC700mA



Warm White 3000K ∠ 24°

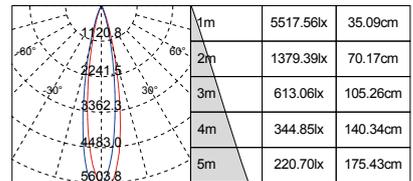

cd Height illuminance Diameter

Option colors



Various Brand of COB LED Light Source:



Product series

**AP-MZ-0110A-8W**



SURFACE LED  
CEILING LIGHT

TECHNICAL SPECIFICATIONS

Input (Optional)	220-240V~50/60 Hz
Maximum Wattage	8W±10% Max

Number of LEDs	1 LEDs COB
----------------	------------

Luminous Flux	405LM (3000K)
---------------	---------------

Main Material	Aluminum & PC Lens Diffuser
---------------	-----------------------------

Color Temperature	3000K / 4000K / 6500K
-------------------	-----------------------

CRI	≥90
-----	-----

Power Factor	≥0.95
--------------	-------


Working Temperature	-10°C~45°C
---------------------	------------

Beam Angle (Optional)	45°
-----------------------	-----

Fixture Dimmable	Non-dimmable
------------------	--------------

Electrical	External Driver
------------	-----------------

Protection class	IP54
------------------	------

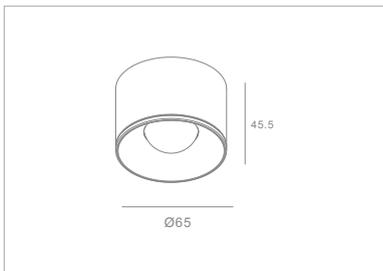

Especially designed for:

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.



Product Model No.	AP-MZ-0110A-8W	
Packaging Detail	30×30×18.5cm	
	STD PKG	48pcs
	N.W	8.64kgs
	G.W	10.64kgs

AP-MZ-0110A-8W

8W LED(COB) 3000K 405lm / incl. MEGALUX Driver SEC: Constant Current: PRI: 220-240 V~ 50/60 Hz 0.38A



Warm White 3000K ∠ 45°

	1m	856.29lx	64.79cm
	2m	214.07lx	129.58cm
	3m	95.14lx	194.37cm
	4m	53.52lx	259.16cm
	5m	34.25lx	323.96cm
	cd	Height	illuminance

Option colors



Various Brand of COB LED Light Source:



SURFACE LED  
CEILING LIGHT

TECHNICAL SPECIFICATIONS

Input (Optional)	220-240V~50/60 Hz
Maximum Wattage	12W±10% Max

Number of LEDs	1 LEDs COB
----------------	------------

Luminous Flux	607LM (3000K)
---------------	---------------

Main Material	Aluminum & PC Lens Diffuser
---------------	-----------------------------

Color Temperature	3000K / 4000K / 6500K
-------------------	-----------------------

CRI	≥90
-----	-----

Power Factor	≥0.95
--------------	-------


Working Temperature	-10°C~45°C
---------------------	------------

Beam Angle (Optional)	45°
-----------------------	-----

Fixture Dimmable	Non-dimmable
------------------	--------------

Electrical	External Driver
------------	-----------------

Protection class	IP54
------------------	------

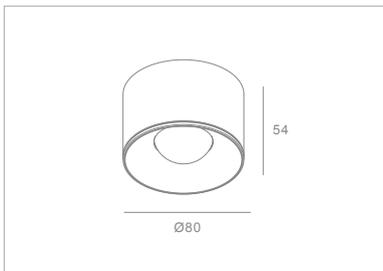

Especially designed for:

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.



Product Model No.	AP-MZ-0111A-12W	
Packaging Detail	27.5×27.5×30.5cm	
	STD PKG	36pcs
	N.W	10.98kgs
	G.W	12.98kgs

AP-MZ-0111A-12W

12W LED(COB) 3000K 607lm / incl. MEGALUX Driver SEC: Constant Current: PRI: 220-240 V~ 50/60 Hz 0.055A



Warm White 3000K ∠45°

	1m	1604.75lx	56.22cm
	2m	401.19lx	112.43cm
	3m	178.31lx	168.65cm
	4m	100.30lx	224.87cm
	5m	64.19lx	281.09cm
	cd	Height	illuminance

Option colors



Various Brand of COB LED Light Source:



SURFACE LED  
CEILING LIGHT

TECHNICAL SPECIFICATIONS

Input (Optional)	220-240V~50/60 Hz
Maximum Wattage	16W±10% Max

Number of LEDs	1 LEDs COB
----------------	------------

Luminous Flux	1081LM (3000K)
---------------	----------------

Main Material	Aluminum & PC Lens Diffuser
---------------	-----------------------------

Color Temperature	3000K / 4000K / 6500K
-------------------	-----------------------

CRI	≥90
-----	-----

Power Factor	≥0.95
--------------	-------


Working Temperature	-10°C~45°C
---------------------	------------

Beam Angle (Optional)	45°
-----------------------	-----

Fixture Dimmable	Non-dimmable
------------------	--------------

Electrical	External Driver
------------	-----------------

Protection class	IP54
------------------	------

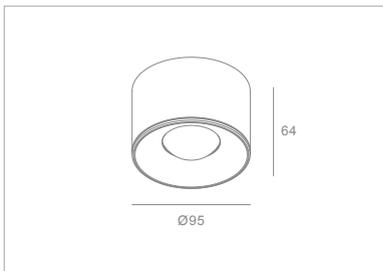

Especially designed for:

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.



Product Model No.	AP-MZ-0112A-16W	
Packaging Detail	32×32×25cm	
	STD PKG	27pcs
	N.W	12.42kgs
	G.W	14.42kgs

AP-MZ-0112A-16W

16W LED(COB) 3000K 1081lm / incl. MEGALUX Driver SEC: Constant Current: PRI: 220-240 V~ 50/60 Hz 0.73A



Warm White 3000K ∠45°

	1m	1461.42lx	107.69cm
	2m	365.35lx	215.38cm
	3m	162.38lx	323.07cm
	4m	91.34lx	430.76cm
	5m	58.46lx	538.44cm
	cd	Height	illuminance

Option colors



Various Brand of COB LED Light Source:



Product series

# AP-MZ-0120A-12W



SURFACE LED  
CEILING LIGHT

TECHNICAL SPECIFICATIONS

Input (Optional)	220-240V~50/60 Hz
Maximum Wattage	12W±10% Max

Number of LEDs	1 LEDs COB
----------------	------------

Luminous Flux	822LM (3000K)
---------------	---------------

Main Material	Aluminum & PC Lens Diffuser
---------------	-----------------------------

Color Temperature	3000K / 4000K / 6500K
-------------------	-----------------------

CRI	≥90
-----	-----

Power Factor	≥0.8
--------------	------


Working Temperature	-10°C~45°C
---------------------	------------

Beam Angle (Optional)	24°
-----------------------	-----

Fixture Dimmable	Non-dimmable
------------------	--------------

Electrical	Internal Driver
------------	-----------------

Protection class	IP20
------------------	------

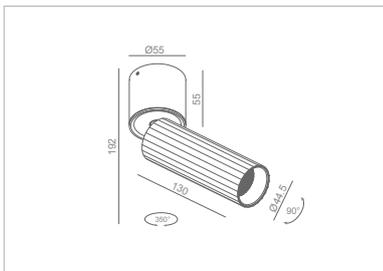

Especially designed for:

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.



Product Model No.	AP-MZ-0120A-12W	
Packaging Detail	46×27×36.5cm	
	STD PKG	24pcs
	N.W	9.58kgs
	G.W	11.58kgs


AP-MZ-0120A-12W

DC28-42V12W LED 3000KDC / PRI:822lm220-240/ incl. V~50/60 Hz 0.18A

Driver SEC: Constant Current: DC300mA



Warm White 3000K ∠ 24°

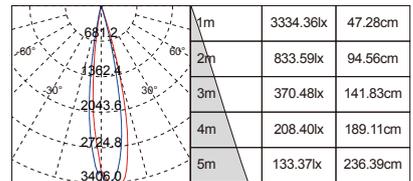

cd Height illuminance Diameter

Option colors



Various Brand of COB LED Light Source:



Product series

# AP-MZ-0130A-15W



SURFACE LED  
CEILING LIGHT

TECHNICAL SPECIFICATIONS

Input (Optional)	220-240V~50/60 Hz
Maximum Wattage	15W±10% Max

Number of LEDs	1 LEDs COB
----------------	------------

Luminous Flux	626LM (3000K)
---------------	---------------

Main Material	Aluminum & PC
---------------	---------------

Color Temperature	3000K / 4000K / 6500K
-------------------	-----------------------

CRI	≥90
-----	-----

Power Factor	≥0.55
--------------	-------


Working Temperature	-10°C~45°C
---------------------	------------

Beam Angle (Adjustable)	110°
-------------------------	------

Fixture Dimmable	Non-dimmable
------------------	--------------

Electrical	Internal Driver
------------	-----------------

Protection class	IP65
------------------	------

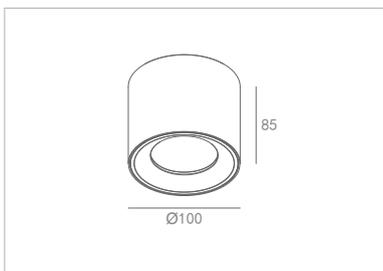

Especially designed for:

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.



Product Model No.	AP-MZ-0130A-15W	
Packaging Detail	41×28×32cm	
	STD PKG	16pcs
	N.W	10.56kgs
	G.W	12.56kgs

AP-MZ-0130A-15W

15W LED 3000K 626lm / incl. MEGALUX Driver SEC: Constant Current: DC350mA DC28-42V DC / PRI: 220-240 V~ 50/60 Hz 0.2A



Warm White 3000K ∠110°

	1m	277.92lx	233.76cm
	2m	69.48lx	467.51cm
	3m	30.88lx	701.27cm
	4m	17.37lx	935.03cm
	5m	11.12lx	1168.78cm
	cd	Height	illuminance

Option colors



Various Brand of COB LED Light Source:



SURFACE LED  
CEILING LIGHT

TECHNICAL SPECIFICATIONS

Input (Optional)	220-240V~50/60 Hz
Maximum Wattage	20W±10% Max

Number of LEDs	1 LEDs COB
----------------	------------

Luminous Flux	777LM (3000K)
---------------	---------------

Main Material	Aluminum & PC
---------------	---------------

Color Temperature	3000K / 4000K / 6500K
-------------------	-----------------------

CRI	≥90
-----	-----

Power Factor	≥0.55
--------------	-------


Working Temperature	-10°C~45°C
---------------------	------------

Beam Angle (Adjustable)	110°
-------------------------	------

Fixture Dimmable	Non-dimmable
------------------	--------------

Electrical	Internal Driver
------------	-----------------

Protection class	IP65
------------------	------

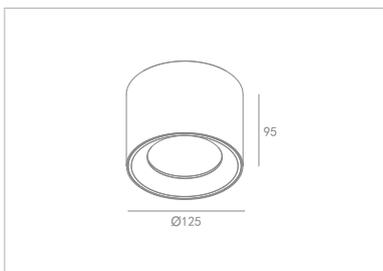

Especially designed for:

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.




Product Model No.	AP-MZ-0131A-20W		
Packaging Detail	33×32.5×35cm		
	STD PKG	12pcs	
	N.W	11.64kgs	
	G.W	13.64kgs	

AP-MZ-0131A-20W

20W LED 3000K 777lm / incl. MEGALUX Driver SEC: Constant Current: DC500mA DC28-42V DC / PRI: 220-240 V~ 50/60 Hz 0.15A



Warm White 3000K ∠110°

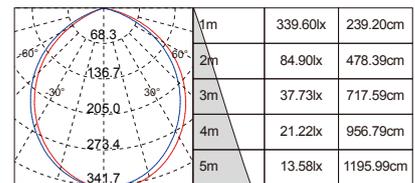

cd Height illuminance Diameter

Option colors



Various Brand of COB LED Light Source:



Product series

# AP-MZ-0140B



SURFACE LED  
CEILING LIGHT

TECHNICAL SPECIFICATIONS

<b>Input (Optional)</b>	220-240V~50/60 Hz
<b>Maximum Wattage</b>	7W±10% Max

<b>Number of LEDs</b>	1 LEDs COB
-----------------------	------------

<b>Luminous Flux</b>	595LM (2700K)
----------------------	---------------

<b>Main Material</b>	Aluminum & PC Lens Diffuser
----------------------	-----------------------------

<b>Color Temperature</b>	2700K
--------------------------	-------

<b>CRI</b>	≥80
------------	-----

<b>Power Factor</b>	≥0.8
---------------------	------


<b>Working Temperature</b>	-10°C~45°C
----------------------------	------------

<b>Beam Angle (Optional)</b>	40°
------------------------------	-----

<b>Fixture Dimmable</b>	Non-dimmable
-------------------------	--------------

<b>Electrical</b>	Internal Driver
-------------------	-----------------

<b>Protection class</b>	IP65
-------------------------	------

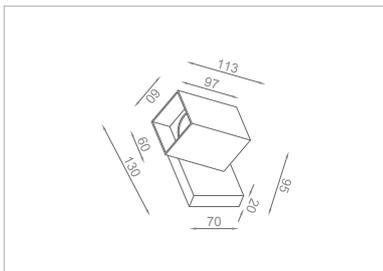

**Especially designed for:**

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.




<b>Product Model No.</b>	AP-MZ-0146B	
<b>Packaging Detail</b>	33×32.5×35cm	
	STD PKG	12pcs
	N.W	11.64kgs
	G.W	13.64kgs

**AP-MZ-0146B**

7W LED 2700K 595lm / incl. MEGALUX Driver SEC: Constant Current: 220-240 V~ 50/60 Hz 0.052A



Warm White 2700K ∠ 40°

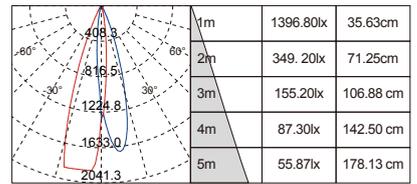

cd      Height      illuminance      Diameter

Various Brand of COB LED Light Source:



Product series

# AP-MZ-0141B



SURFACE LED  
CEILING LIGHT

TECHNICAL SPECIFICATIONS

Input (Optional)	220-240V~50/60 Hz
Maximum Wattage	14W±10% Max

Number of LEDs	2 LEDs COB
----------------	------------

Luminous Flux	1190LM (2700K)
---------------	----------------

Main Material	Aluminum & PC Lens Diffuser
---------------	-----------------------------

Color Temperature	2700K
-------------------	-------

CRI	≥80
-----	-----

Power Factor	≥0.8
--------------	------


Working Temperature	-10°C~45°C
---------------------	------------

Beam Angle (Optional)	40°
-----------------------	-----

Fixture Dimmable	Non-dimmable
------------------	--------------

Electrical	Internal Driver
------------	-----------------

Protection class	IP65
------------------	------

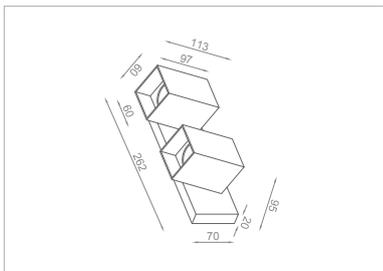


Product Model No.	AP-MZ-0147B	
Packaging Detail	33×32.5×35cm	
	STD PKG	12pcs
	N.W	11.64kgs
	G.W	13.64kgs

AP-MZ-0147B

14W LED 2700K 1190lm / incl. MEGALUX Driver SEC: Constant Current: 220-240 V~50/60 Hz 0.052A



Warm White 2700K ∠ 40°

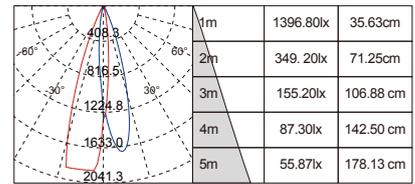

cd Height illuminance Diameter

Especially designed for:

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.



Various Brand of COB LED Light Source:



Product series

# AP-MZ-0142B



SURFACE LED  
CEILING LIGHT

TECHNICAL SPECIFICATIONS

Input (Optional)	220-240V~50/60 Hz
Maximum Wattage	21W±10% Max

Number of LEDs	3 LEDs COB
----------------	------------

Luminous Flux	1785LM (2700K)
---------------	----------------

Main Material	Aluminum & PC Lens Diffuser
---------------	-----------------------------

Color Temperature	2700K
-------------------	-------

CRI	≥80
-----	-----

Power Factor	≥0.8
--------------	------


Working Temperature	-10°C~45°C
---------------------	------------

Beam Angle (Optional)	40°
-----------------------	-----

Fixture Dimmable	Non-dimmable
------------------	--------------

Electrical	Internal Driver
------------	-----------------

Protection class	IP20
------------------	------

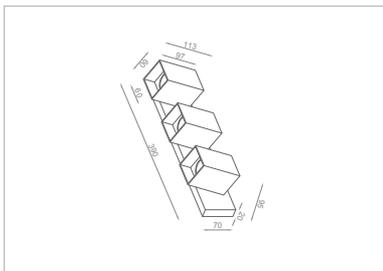


Product Model No.	AP-MZ-0148B	
Packaging Detail	46×27×36.5cm	
	STD PKG	24pcs
	N.W	11.52kgs
	G.W	13.52kgs

**AP-MZ-0148B**

21W LED 2700K 1785lm / incl. MEGALUX Driver SEC: Constant Current: 220-240 V~50/60 Hz 0.052A



Warm White 2700K ∠ 40°

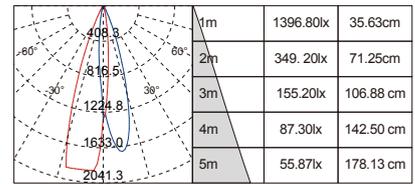

cd Height illuminance Diameter

**Especially designed for:**

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.



Various Brand of COB LED Light Source:



Product series

# AP-MZ-0143B



SURFACE LED  
CEILING LIGHT

TECHNICAL SPECIFICATIONS

Input (Optional)	220-240V~50/60 Hz
Maximum Wattage	7W±10% Max

Number of LEDs	1 LEDs COB
----------------	------------

Luminous Flux	595LM (2700K)
---------------	---------------

Main Material	Aluminum & PC Lens Diffuser
---------------	-----------------------------

Color Temperature	2700K
-------------------	-------

CRI	≥80
-----	-----

Power Factor	≥0.8
--------------	------

Working Temperature	-10°C~45°C
---------------------	------------

Beam Angle (Optional)	40°
-----------------------	-----

Fixture Dimmable	Non-dimmable
------------------	--------------

Electrical	Internal Driver
------------	-----------------

Protection class	IP20
------------------	------




Product Model No.	AP-MZ-0143B	
Packaging Detail	46×27×36.5cm	
	STD PKG	24pcs
	N.W	11.52kgs
	G.W	13.52kgs

**AP-MZ-0143B**

7W LED 2700K 595lm / incl. MEGALUX Driver SEC: Constant Current: 220-240 V~ 50/60 Hz 0.052A



Warm White 2700K ∠ 40°

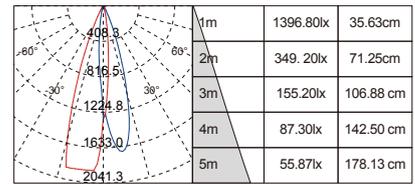

cd      Height      illuminance      Diameter

**Especially designed for:**

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.



Various Brand of COB LED Light Source:



Product series

# AP-MZ-0144B



SURFACE LED  
CEILING LIGHT

TECHNICAL SPECIFICATIONS	
Input (Optional)	220-240V~50/60 Hz
Maximum Wattage	14W±10% Max
Number of LEDs	
2 LEDs COB	
Luminous Flux	
1190LM (2700K)	
Main Material	
Aluminum & PC Lens Diffuser	
Color Temperature	
2700K	

CRI	≥80
Power Factor	≥0.8
Working Temperature	-10°C~45°C
Beam Angle (Optional)	40°
Fixture Dimmable	Non-dimmable
Electrical	Internal Driver
Protection class	IP20




Product Model No.	AP-MZ-0144	
Packaging Detail	46×27×36.5cm	
	STD PKG	24pcs
	N.W	11.52kgs
	G.W	13.52kgs

### AP-MZ-0144

14W LED 2700K 1190lm / incl. MEGALUX Driver SEC: Constant Current: 220-240 V~50/60 Hz 0.052A



Warm White 2700K ∠ 40°

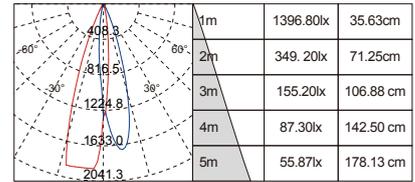

cd Height illuminance Diameter

**Especially designed for:**

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.



Various Brand of COB LED Light Source:



Product series

# AP-MZ-0145B



SURFACE LED  
CEILING LIGHT

TECHNICAL SPECIFICATIONS

Input (Optional)	220-240V~50/60 Hz
Maximum Wattage	21W±10% Max

Number of LEDs	3 LEDs COB
----------------	------------

Luminous Flux	1785LM (2700K)
---------------	----------------

Main Material	Aluminum & PC Lens Diffuser
---------------	-----------------------------

Color Temperature	2700K
-------------------	-------

CRI	≥80
-----	-----

Power Factor	≥0.8
--------------	------

Working Temperature	-10°C~45°C
---------------------	------------

Beam Angle (Optional)	40°
-----------------------	-----

Fixture Dimmable	Non-dimmable
------------------	--------------

Electrical	Internal Driver
------------	-----------------

Protection class	IP20
------------------	------




Product Model No.	AP-MZ-0145B	
Packaging Detail 	46×27×36.5cm	
	STD PKG	24pcs
	N.W	11.52kgs
	G.W	13.52kgs

**AP-MZ-0145B**

21W LED 2700K 1785lm / incl. MEGALUX Driver SEC: Constant Current: 220-240 V~50/60 Hz 0.052A



Warm White 2700K ∠ 40°

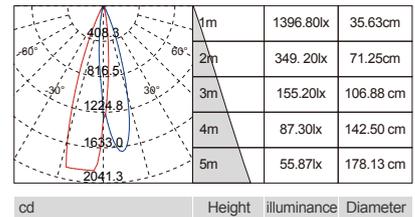

**Especially designed for:**

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.



Various Brand of COB LED Light Source:



Product series

# AP-MZ-0146B



SURFACE LED  
CEILING LIGHT

TECHNICAL SPECIFICATIONS

Input (Optional)	220-240V~50/60 Hz
Maximum Wattage	7W±10% Max

Number of LEDs	1 LEDs COB
----------------	------------

Luminous Flux	595LM (2700K)
---------------	---------------

Main Material	Aluminum & PC Lens Diffuser
---------------	-----------------------------

Color Temperature	2700K
-------------------	-------

CRI	≥80
-----	-----

Power Factor	≥0.8
--------------	------


Working Temperature	-10°C~45°C
---------------------	------------

Beam Angle (Optional)	40°
-----------------------	-----

Fixture Dimmable	Non-dimmable
------------------	--------------

Electrical	Internal Driver
------------	-----------------

Protection class	IP20
------------------	------

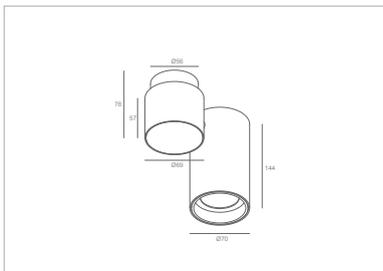


Product Model No.	AP-MZ-0146B	
Packaging Detail	46×27×36.5cm	
	STD PKG	24pcs
	N.W	11.52kgs
	G.W	13.52kgs

**AP-MZ-0146B**

7W LED 2700K 595lm / incl. MEGALUX Driver SEC: Constant Current: 220-240 V~ 50/60 Hz 0.052A



Warm White 2700K ∠ 40°

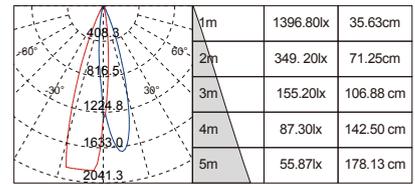

cd Height illuminance Diameter

**Especially designed for:**

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.



Various Brand of COB LED Light Source:



Product series

# AP-MZ-0147B



SURFACE LED  
CEILING LIGHT

TECHNICAL SPECIFICATIONS

Input (Optional)	220-240V~50/60 Hz
Maximum Wattage	14W±10% Max

Number of LEDs	2 LEDs COB
----------------	------------

Luminous Flux	1190LM (2700K)
---------------	----------------

Main Material	Aluminum & PC Lens Diffuser
---------------	-----------------------------

Color Temperature	2700K
-------------------	-------

CRI	≥80
-----	-----

Power Factor	≥0.8
--------------	------


Working Temperature	-10°C~45°C
---------------------	------------

Beam Angle (Optional)	40°
-----------------------	-----

Fixture Dimmable	Non-dimmable
------------------	--------------

Electrical	Internal Driver
------------	-----------------

Protection class	IP20
------------------	------

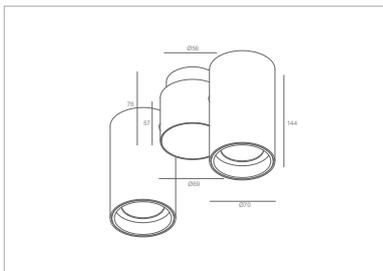

Especially designed for:

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.




Product Model No.	AP-MZ-0147B	
Packaging Detail	46×27×36.5cm	
	STD PKG	24pcs
	N.W	11.52kgs
	G.W	13.52kgs

AP-MZ-0147B

14W LED 2700K 1190lm / incl. MEGALUX Driver SEC: Constant Current: 220-240 V~50/60 Hz 0.052A



Warm White 2700K ∠ 40°

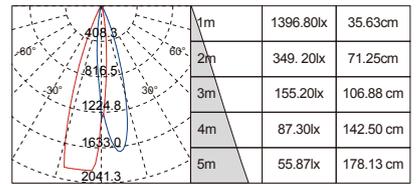

cd Height illuminance Diameter

Various Brand of COB LED Light Source:



Product series

# AP-MZ-0148B



SURFACE LED  
CEILING LIGHT

TECHNICAL SPECIFICATIONS

Input (Optional)	220-240V~50/60 Hz
Maximum Wattage	21W±10% Max

Number of LEDs	3 LEDs COB
----------------	------------

Luminous Flux	1785LM (2700K)
---------------	----------------

Main Material	Aluminum & PC Lens Diffuser
---------------	-----------------------------

Color Temperature	2700K
-------------------	-------

CRI	≥80
-----	-----

Power Factor	≥0.8
--------------	------


Working Temperature	-10°C~45°C
---------------------	------------

Beam Angle (Optional)	40°
-----------------------	-----

Fixture Dimmable	Non-dimmable
------------------	--------------

Electrical	Internal Driver
------------	-----------------

Protection class	IP20
------------------	------

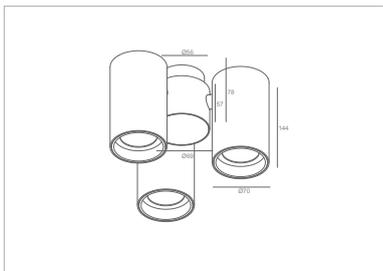

Especially designed for:

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.




Product Model No.	AP-MZ-0148B	
Packaging Detail 	46×27×36.5cm	
	STD PKG	24pcs
	N.W	11.52kgs
	G.W	13.52kgs

AP-MZ-0148B

21W LED 2700K 1785lm / incl. MEGALUX Driver SEC: Constant Current: 220-240 V~50/60 Hz 0.052A



Warm White 2700K ∠ 40°

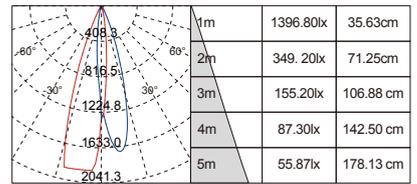

cd      Height      illuminance      Diameter

Various Brand of COB LED Light Source:



Product series

# AP-MZ-0150B



SURFACE LED  
CEILING LIGHT

TECHNICAL SPECIFICATIONS

Input (Optional)	220-240V~50/60 Hz
Maximum Wattage	7W±10% Max

Number of LEDs	1 LEDs COB
----------------	------------

Luminous Flux	595LM (2700K)
---------------	---------------

Main Material	Aluminum & PC Lens Diffuser
---------------	-----------------------------

Color Temperature	2700K
-------------------	-------

CRI	≥80
-----	-----

Power Factor	≥0.8
--------------	------

Working Temperature	-10°C~45°C
---------------------	------------

Beam Angle (Optional)	40°
-----------------------	-----

Fixture Dimmable	Non-dimmable
------------------	--------------

Electrical	Internal Driver
------------	-----------------

Protection class	IP20
------------------	------




Product Model No.	AP-MZ-0150B	
Packaging Detail 	46×27×36.5cm	
	STD PKG	24pcs
	N.W	11.52kgs
	G.W	13.52kgs

**AP-MZ-0150B**

7W LED 2700K 595lm / incl. MEGALUX Driver SEC: Constant Current: 220-240 V~ 50/60 Hz 0.052A



Warm White 2700K ∠ 40°

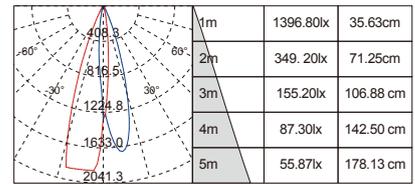

cd Height illuminance Diameter

**Especially designed for:**

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.



Various Brand of COB LED Light Source:



Product series

# AP-MZ-0151B



SURFACE LED  
CEILING LIGHT

TECHNICAL SPECIFICATIONS

Input (Optional)	220-240V~50/60 Hz
Maximum Wattage	7W±10% Max

Number of LEDs	1 LEDs COB
----------------	------------

Luminous Flux	595LM (2700K)
---------------	---------------

Main Material	Aluminum & PC Lens Diffuser
---------------	-----------------------------

Color Temperature	2700K
-------------------	-------

CRI	≥80
-----	-----

Power Factor	≥0.8
--------------	------

Working Temperature	-10°C~45°C
---------------------	------------

Beam Angle (Optional)	40°
-----------------------	-----

Fixture Dimmable	Non-dimmable
------------------	--------------

Electrical	Internal Driver
------------	-----------------

Protection class	IP20
------------------	------




Product Model No.	AP-MZ-0150B	
Packaging Detail	46×27×36.5cm	
	STD PKG	24pcs
	N.W	11.52kgs
	G.W	13.52kgs

**AP-MZ-0150B**

7W LED 2700K 595lm / incl. MEGALUX Driver SEC: Constant Current: 220-240 V~ 50/60 Hz 0.052A



Warm White 2700K ∠ 40°

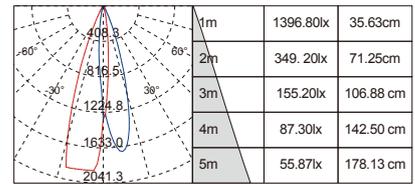

cd      Height      illuminance      Diameter

**Especially designed for:**

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.



Various Brand of COB LED Light Source:



Product series

# AP-MZ-0170A-10W



SURFACE LED  
CEILING LIGHT

TECHNICAL SPECIFICATIONS

Input (Optional)	220-240V~50/60 Hz
Maximum Wattage	10W±10% Max

Number of LEDs	1 LEDs COB
----------------	------------

Luminous Flux	680LM (3000K)
---------------	---------------

Main Material	Aluminum & PC
---------------	---------------

Color Temperature	3000K / 4000K / 6500K
-------------------	-----------------------

CRI	≥90
-----	-----

Power Factor	≥0.55
--------------	-------


Working Temperature	-10°C~45°C
---------------------	------------

Beam Angle (Adjustable)	15°-60°
-------------------------	---------

Fixture Dimmable	Non-dimmable
------------------	--------------

Electrical	Internal Driver
------------	-----------------

Protection class	IP20
------------------	------

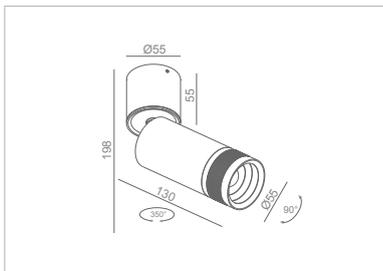

Especially designed for:

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.




Product Model No.	AP-MZ-0170A-10W		
Packaging Detail	46×27×36.5cm		
	STD PKG	24pcs	
	N.W	11.52kgs	
	G.W	13.52kgs	

AP-MZ-0170A-10W

10W LED 3000K 680lm / incl. MEGALUX Driver SEC: Constant Current: DC250mA DC28-42V DC / PRI: 220-240 V~ 50/60 Hz 0.15A



Warm White 3000K ∠15°

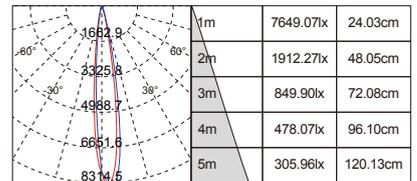

cd Height illuminance Diameter

Option colors



Various Brand of COB LED Light Source:




Product series

# AP-TRIP308-20W



LED TRIP-PROOF  
LIGHT

TECHNICAL SPECIFICATIONS	
Input (Optional)	220-240V~50/60 Hz
Maximum Wattage	20W±10% Max
Number of LEDs	
120 LEDs SMD	
Luminous Flux	
2117LM 6500K	
Main Material	
Aluminum & PC Lens Diffuser	
Color Temperature	
3000K / 4000K / 6500K	
CRI	≥90
Power Factor	≥0.5
Working Temperature	-10°C~45°C
Beam Angle (Optional)	130°
Fixture Dimmable	Non-dimmable
Electrical	Internal Driver
Protection class	IP65

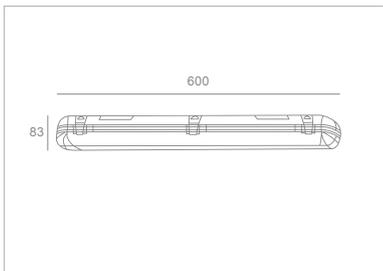

**Especially designed for:**  
Outdoor building lighting, tree lighting, bridge lighting, buildings, parks, billboards, squares, courtyards, stadiums, tunnels, highways, factories, workshops, shopping malls, parking lots, stations and other places that require lighting.




Product Model No.	AP-TRIP308-20W	
Packaging Detail	65×29×43cm	
	STD PKG	15pcs
	N.W	15.3kgs
	G.W	17.3kgs

**AP-TRIP01-20W**

DC27-42V20W LED 4000KDC / PRI:2117lm220-240/ incl.V~50/60 Hz 0.120A  
Driver SEC: Constant Current: DC500mA



Warm White 6500K ∠ 130°

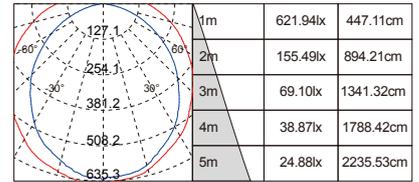

cd      Height      illuminance      Diameter

Various Brand of SMD LED Light Source:



Product series

# AP-TRIP308-30W



LED TRIP-PROOF  
LIGHT

TECHNICAL SPECIFICATIONS

Input (Optional)	220-240V~50/60 Hz
Maximum Wattage	30W±10% Max

Number of LEDs	40 LEDs SMD
----------------	-------------

Luminous Flux	2126LM (4000K)
---------------	----------------

Main Material	Aluminum & PC Lens Diffuser
---------------	-----------------------------

Color Temperature	3000K / 4000K / 6500K
-------------------	-----------------------

CRI	≥80
-----	-----

Power Factor	≥0.95
--------------	-------


Working Temperature	-10°C~45°C
---------------------	------------

Beam Angle (Optional)	110°
-----------------------	------

Fixture Dimmable	Non-dimmable
------------------	--------------

Electrical	Internal Driver
------------	-----------------

Protection class	IP65
------------------	------

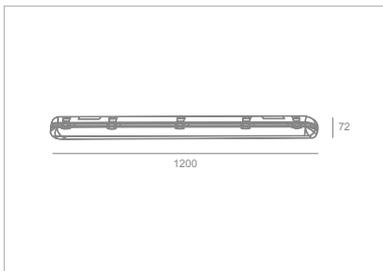

Product Model No.	AP-TRIP308-30W	
Packaging Detail	127×29×26cm	
	STD PKG	9pcs
	N.W	15.3kgs
	G.W	17.3kgs


AP-TRIP308-30W

DC28-40V30W LED 4000KDC / PRI:2126lm220-240/ incl.V~50/60 Hz 0.35A

Driver SEC: Constant Current: DC1000mA



Warm White 4000K ∠ 110°

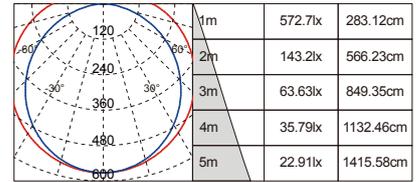

cd Height illuminance Diameter

Especially designed for:

Outdoor building lighting, tree lighting, bridge lighting, buildings, parks, billboards, squares, courtyards, stadiums, tunnels, highways, factories, workshops, shopping malls, parking lots, stations and other places that require lighting.



Various Brand of SMD LED Light Source:





## FASHION COLLOCATION

Let romance accompany you and live on warm life



DAFAR SERIES

Simplification is new tendency for modern lighting design, however, such simplification not only represents lighting element but also symbolizes delicacy and daring in selection for material and juvenile and bold passion and vitality.

*Your light consultant.....*

SIMPLE +  
AND CREATIVE

*The lighting aesthetics of Nordic style is built with the design vocabulary that is always simple and informal.*



COLLOCATION


**More styles  
in the same series**

— Coming soon... ..



01  
02-

N O R D I C L U X U R Y

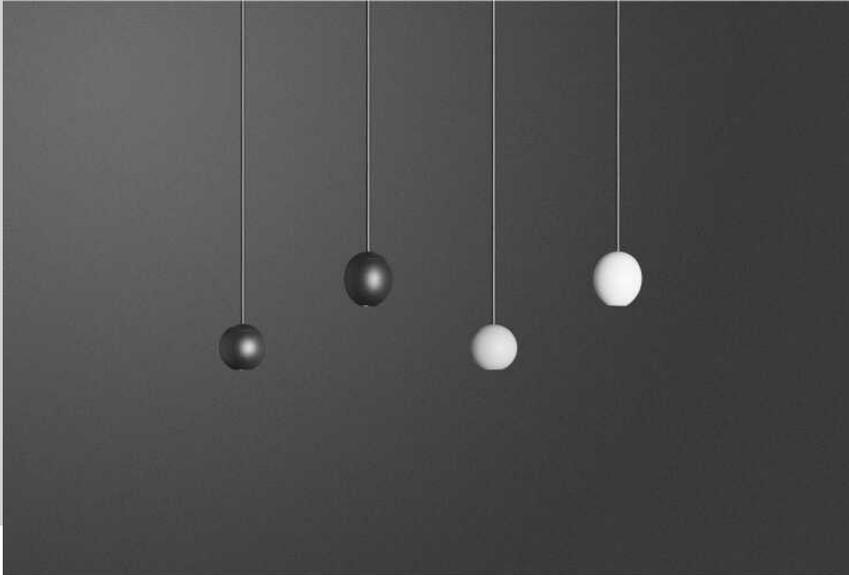

**NEW**

**FREE COLLOCATION**

FRESH, NATURAL, CONCISE AND ELEGANT

.....

## CREATIVE MODELING STYLISH AND BEAUTIFUL

Various styles collocation



# DESIGN FOR LIFE

*I know you better*

A life circle that loves art

.....

*Lu Lu Han*

**Chief Experience Officer**

CRYSTAL AND SOFT LIGHT



//

Nordic wind element lamp,  
stylist clues contracted and dinkum design gimmick  
each the backside  
of each concise line the connotation


## LIFE CIRCLE

*OVERALL DESIGN*

*PROCESSION*

*Basic shape*

*FOCUS*

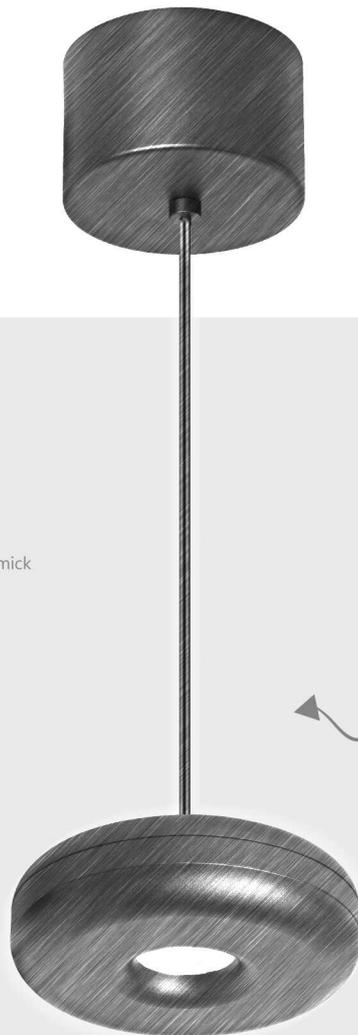

*The subtle details can be  
seen everywhere*

*Base shape*




*It has good corrosion resistance, rust prevention, anti coloration and long durability.*



*There are moments in life when you miss someone so much that you just want to pick them from your dreams and hug them for real! Dream what you want to dream, go where you want to go, be what you want to be, because you have only one!*

## D A F A R

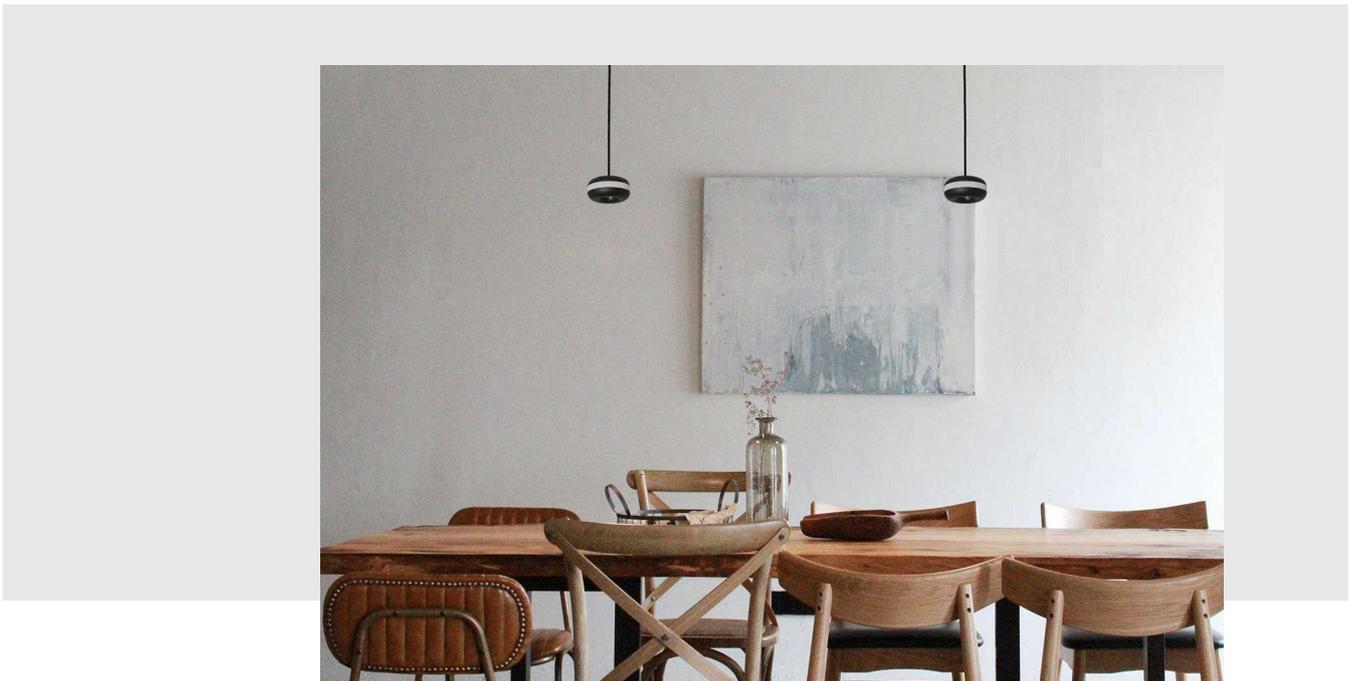

## Classical reproduction

*In view of each customer's personalization and the difference in understanding, we can give different forms of performance from various angles, create a people-oriented home environment, and create a tasteful and elegant comfortable space!*



Home lighting design atmosphere, a variety of specifications, to meet the needs of different spaces



## Northern Europe




# ATHENA

Nordic, minimalist beauty

*Don't worry about not having time to travel  
and go shopping. The soft and elegant color  
unconsciously brings us back to our hearts*



MINIMALIST

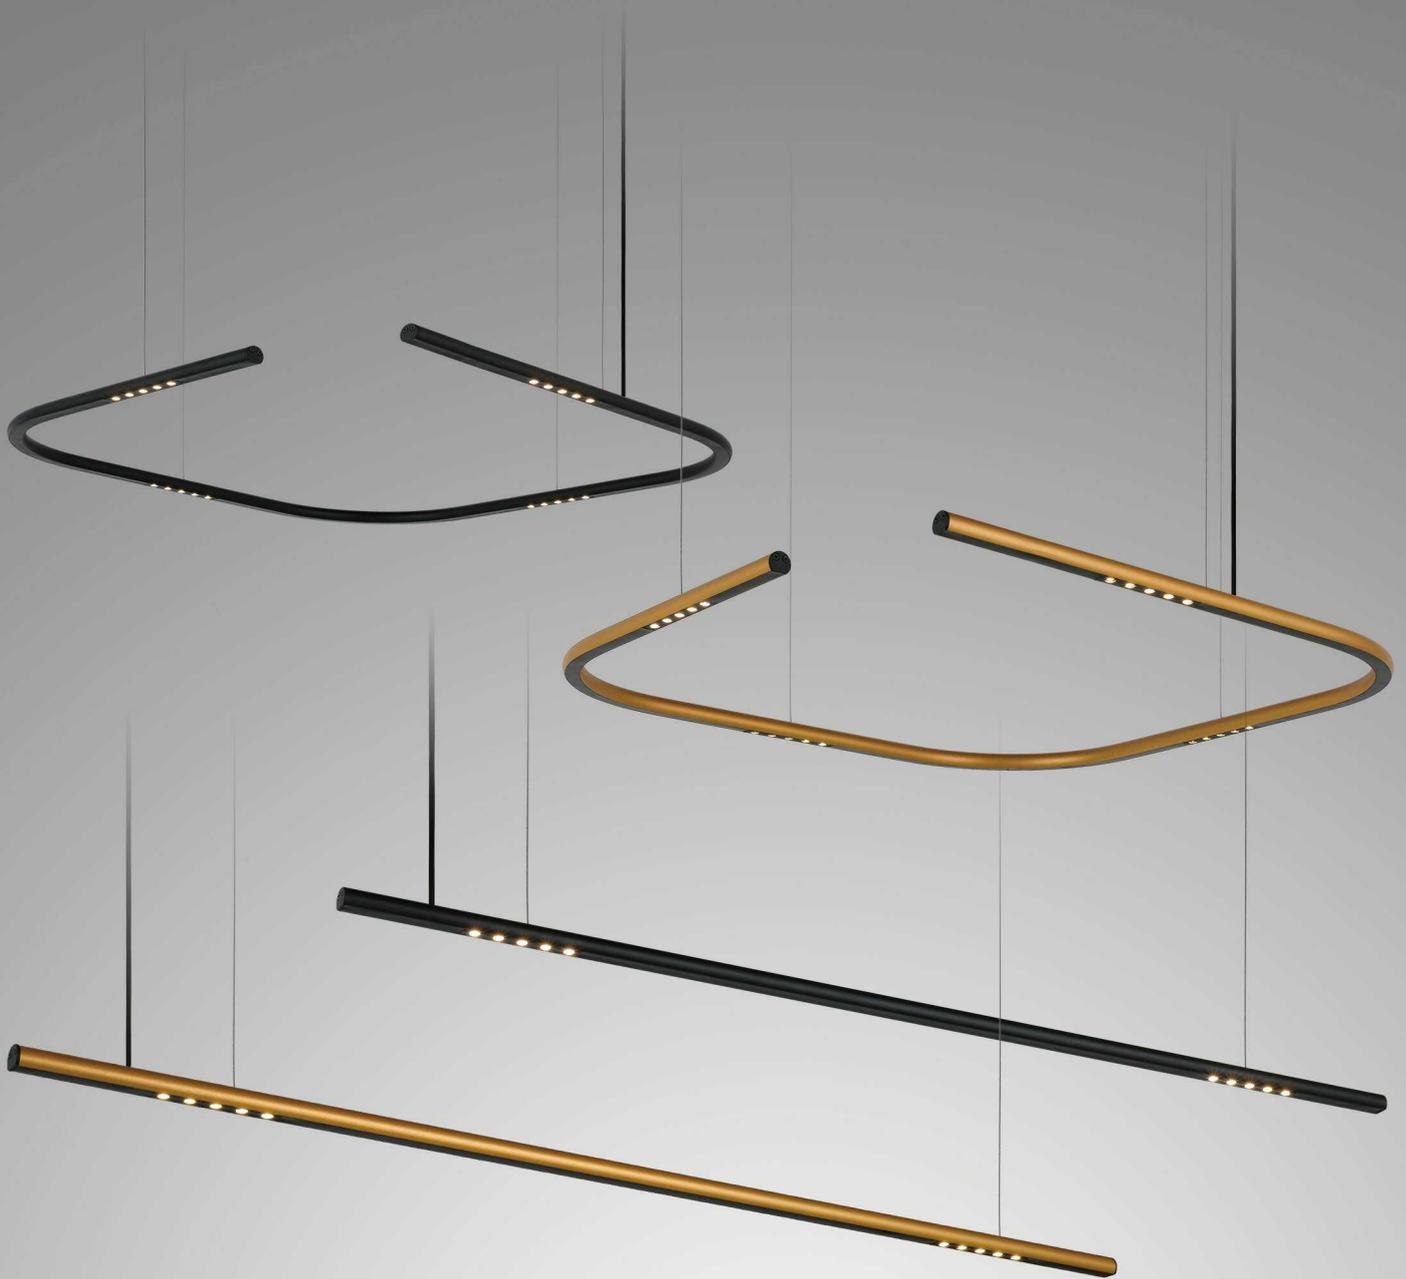

## DIFFERENT COLORS

A variety of styles and colors to create a personalized home





**Deductive**

**Nordic aesthetics  
Modern**

**Aesthetics of  
light luxury**



— luxury

## SHARP CORNERS BEAUTIFUL

If the light also has its own voice and thought, can speak and dance, then they will be willing to bloom into such a posture ~ ~ beautiful, enchanting

# QUALITY Stereo light

Made of high quality materials,  
Provide first class quality

*The simple curve, simple but not simple, winding and elegant, creates a  
kind of soft artistic light and shadow, and interprets the true light and  
color with the heart of design. The years are quiet and soft*



G E O M E T R Y



Product series

**AP-DZ-0010A-7W**



LED PENDANT  
LIGHT

TECHNICAL SPECIFICATIONS

Input (Optional)	220-240V~50/60 Hz
Maximum Wattage	7W±10% Max

Number of LEDs	1 LEDs COB
----------------	------------

Luminous Flux	476LM (3000K)
---------------	---------------

Main Material	Aluminum & PC Lens Diffuser
---------------	-----------------------------

Color Temperature	3000K / 4000K / 6500K
-------------------	-----------------------

CRI	≥90
-----	-----

Power Factor	≥0.8
--------------	------


Working Temperature	-10°C~45°C
---------------------	------------

Beam Angle (Optional)	45°
-----------------------	-----

Fixture Dimmable	Non-dimmable
------------------	--------------

Electrical	Internal Driver
------------	-----------------

Protection class	IP20
------------------	------

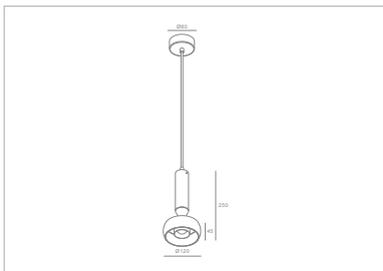

Especially designed for:

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.



Product Model No.	AP-DZ-0010A-7W	
Packaging Detail	64×48.5×31.5cm	
	STD PKG	12pcs
	N.W	6.12kgs
	G.W	8.8kgs


AP-DZ-0010A-7W

DC30-42VDC7W LED 3000K/ PRI:476lm220-240/ incl. -V~ 50/60 Hz 0.050A

Driver SEC: Constant Current: DC170mA



Warm White 3000K ∠45°

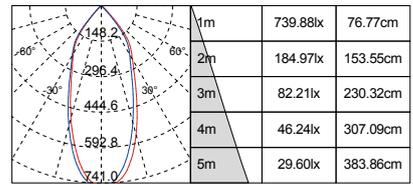

cd Height illuminance Diameter

Option colors



Various Brand of COB LED Light Source:



LED PENDANT  
LIGHT

TECHNICAL SPECIFICATIONS

Input (Optional)	220-240V~50/60 Hz
Maximum Wattage	7W±10% Max

Number of LEDs	1 LEDs COB
----------------	------------

Luminous Flux	476LM (3000K)
---------------	---------------

Main Material	Aluminum & PC Lens Diffuser
---------------	-----------------------------

Color Temperature	3000K / 4000K / 6500K
-------------------	-----------------------

CRI	≥90
-----	-----

Power Factor	≥0.8
--------------	------


Working Temperature	-10°C~45°C
---------------------	------------

Beam Angle (Optional)	45°
-----------------------	-----

Fixture Dimmable	Non-dimmable
------------------	--------------

Electrical	Internal Driver
------------	-----------------

Protection class	IP20
------------------	------

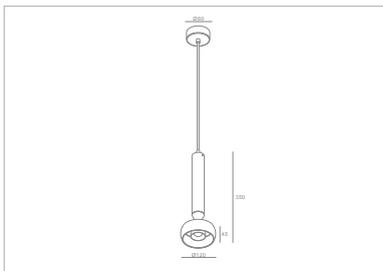

Especially designed for:

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.




Product Model No.	AP-DZ-0011A-7W	
Packaging Detail	64×48.5×41.5cm	
	STD PKG	12pcs
	N.W	7.08kgs
	G.W	10.51kgs

AP-DZ-0011A-7W

DC30-42VDC7W LED 3000K/ PRI:476lm220-240/ incl. -V~ 50/60 Hz 0.050A  
Driver SEC: Constant Current: DC170mA



Warm White 3000K ∠45°

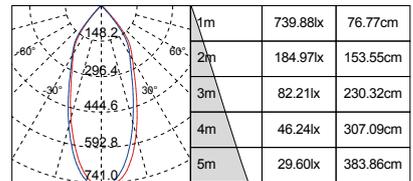

cd Height illuminance Diameter

Option colors



Various Brand of COB LED Light Source:





Product series

**AP-DZ-0014A-7W**



LED PENDANT  
LIGHT

TECHNICAL SPECIFICATIONS

Input (Optional)	220-240V~50/60 Hz
Maximum Wattage	7W±10% Max

Number of LEDs	1 LEDs COB
----------------	------------

Luminous Flux	476LM (3000K)
---------------	---------------

Main Material	Aluminum & PC Lens Diffuser
---------------	-----------------------------

Color Temperature	3000K / 4000K / 6500K
-------------------	-----------------------

CRI	≥90
-----	-----

Power Factor	≥0.8
--------------	------


Working Temperature	-10°C~45°C
---------------------	------------

Beam Angle (Optional)	45°
-----------------------	-----

Fixture Dimmable	Non-dimmable
------------------	--------------

Electrical	Internal Driver
------------	-----------------

Protection class	IP20
------------------	------

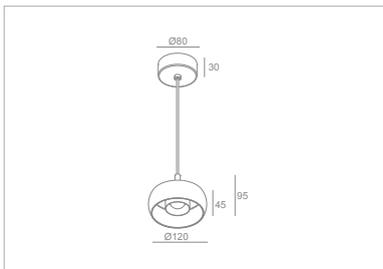

Especially designed for:

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.




Product Model No.	AP-DZ-0014A-7W	
Packaging Detail	50×33.5×39cm	
	STD PKG	12pcs
	N.W	6.06kgs
	G.W	8.06kgs

AP-DZ-0014A-7W

DC30-42VDC7W LED 3000K/ PRI:476lm220-240/ incl. -V~ 50/60 Hz 0.050A  
Driver SEC: Constant Current: DC170mA



Warm White 3000K ∠45°

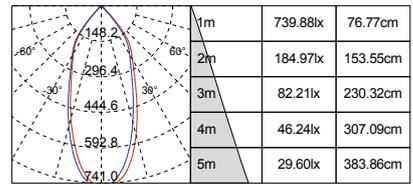

cd Height illuminance Diameter

Option colors



Various Brand of COB LED Light Source:





Product series

**AP-DZ-0040A-18W**



LED PENDANT  
LIGHT

TECHNICAL SPECIFICATIONS

<b>Input (Optional)</b>	220-240V~50/60 Hz
<b>Maximum Wattage</b>	18W±10% Max

<b>Number of LEDs</b>	10LEDs SMT
-----------------------	------------

<b>Luminous Flux</b>	1206LM (3000K)
----------------------	----------------

<b>Main Material</b>	Aluminum & Silica Gel
----------------------	-----------------------

<b>Color Temperature</b>	3000K / 4000K / 6500K
--------------------------	-----------------------

<b>CRI</b>	≥90
------------	-----

<b>Power Factor</b>	≥0.92
---------------------	-------

<b>Working Temperature</b>	-10°C~45°C
----------------------------	------------

<b>Beam Angle (Optional)</b>	20°
------------------------------	-----

<b>Fixture Dimmable</b>	Non-dimmable
-------------------------	--------------

<b>Electrical</b>	Internal Driver
<b>Protection class</b>	IP20




<b>Product Model No.</b>	AP-DZ-0040A-18W	
<b>Packaging Detail</b>	125.5×20×20cm	
	STD PKG	4pcs
	N.W	3.2kgs
	G.W	6.68kgs

## AP-DZ-0040A-18W

DC27-42VDC18W LED 3000K/ PRI:1206lm220-240/ incl.V~50/60 Hz 0.120A

Driver SEC: Constant Current: DC500mA

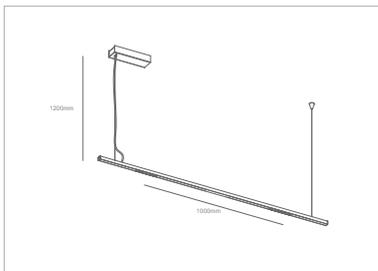

**Especially designed for:**

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.



Various Brand of SMT LED Light Source:



LED PENDANT  
LIGHT

TECHNICAL SPECIFICATIONS

<b>Input (Optional)</b>	220-240V~50/60 Hz
<b>Maximum Wattage</b>	25W±10% Max

<b>Number of LEDs</b>	15 LEDs SMT
-----------------------	-------------

<b>Luminous Flux</b>	1675LM (3000K)
----------------------	----------------

<b>Main Material</b>	Aluminum & Silica Gel
----------------------	-----------------------

<b>Color Temperature</b>	3000K / 4000K / 6500K
--------------------------	-----------------------

<b>CRI</b>	≥90
------------	-----

<b>Power Factor</b>	≥0.92
---------------------	-------

<b>Working Temperature</b>	-10°C~45°C
----------------------------	------------

<b>Beam Angle (Optional)</b>	20°
------------------------------	-----

<b>Fixture Dimmable</b>	Non-dimmable
-------------------------	--------------


<b>Electrical</b>	Internal Driver
<b>Protection class</b>	IP20



<b>Product Model No.</b>	AP-DZ-0041A-25W	
<b>Packaging Detail</b>	175.5×20×20cm	
	STD PKG	4pcs
	N.W	3.6kgs
	G.W	8.8kgs

**AP-DZ-0041A-25W**

DC30-42VDC25W LED 3000K/ PRI:1675lm220-240/ incl.V~50/60 Hz 0.170A  
Driver SEC: Constant Current: DC750mA

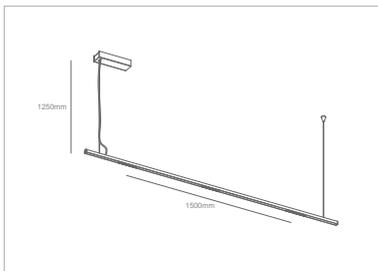

**Especially designed for:**

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.



**Various Brand of SMT LED Light Source:**



LED PENDANT  
LIGHT


TECHNICAL SPECIFICATIONS	
<b>Input (Optional)</b>	220-240V~50/60 Hz
<b>Maximum Wattage</b>	35W±10% Max
<b>Number of LEDs</b>	
20 LEDs SMT	
<b>Luminous Flux</b>	
2345LM (3000K)	
<b>Main Material</b>	
Aluminum & Silica Gel	
<b>Color Temperature</b>	
3000K / 4000K / 6500K	
<b>CRI</b>	≥90
<b>Power Factor</b>	≥0.92
<b>Working Temperature</b>	-10°C~45°C
<b>Beam Angle (Optional)</b>	20°
<b>Fixture Dimmable</b>	Non-dimmable
<b>Electrical</b>	
<b>Protection class</b>	IP20



<b>Product Model No.</b>	AP-DZ-0042A-35W	
<b>Packaging Detail</b>	225.5×20×20cm	
	STD PKG	4pcs
	N.W	4.4kgs
	G.W	10.8kgs

### AP-DZ-0042A-35W

DC25-36VDC35W LED 3000K/ PRI:2345lm220-240/ incl.V~50/60 Hz 0.22A  
Driver SEC: Constant Current: DC1050mA

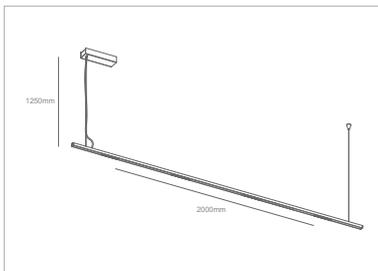

#### Especially designed for:

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.



#### Various Brand of SMT LED Light Source:





Product series

**AP-DZ-0043A-20W**



LED PENDANT  
LIGHT

TECHNICAL SPECIFICATIONS

<b>Input (Optional)</b>	220-240V~50/60 Hz
<b>Maximum Wattage</b>	20W±10% Max

<b>Number of LEDs</b>	20LEDs SMT
-----------------------	------------

<b>Luminous Flux</b>	1340LM (3000K)
----------------------	----------------

<b>Main Material</b>	Aluminum & Silica Gel
----------------------	-----------------------

<b>Color Temperature</b>	3000K / 4000K / 6500K
--------------------------	-----------------------

<b>CRI</b>	≥90
------------	-----

<b>Power Factor</b>	≥0.92
---------------------	-------

<b>Working Temperature</b>	-10°C~45°C
----------------------------	------------

<b>Beam Angle (Optional)</b>	20°
------------------------------	-----

<b>Fixture Dimmable</b>	Non-dimmable
-------------------------	--------------


<b>Electrical</b>	Internal Driver
<b>Protection class</b>	IP20



<b>Product Model No.</b>	AP-DZ-0043A-20W	
<b>Packaging Detail</b>	70×70×6.5cm	
	STD PKG	1pcs
	N.W	1.15kgs
	G.W	2.63kgs

**AP-DZ-0043A-20W**

DC27-42VDC20W LED 3000K/ PRI:1340lm220-240/ incl.V~50/60 Hz 0.20A  
Driver SEC: Constant Current: DC500mA

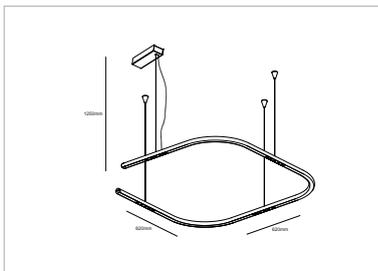

**Especially designed for:**

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.



**Various Brand of SMT LED Light Source:**



LED PENDANT  
LIGHT


TECHNICAL SPECIFICATIONS	
<b>Input (Optional)</b>	220-240V~50/60 Hz
<b>Maximum Wattage</b>	32W±10% Max
<b>Number of LEDs</b>	
20 LEDs SMT	
<b>Luminous Flux</b>	
2144LM (3000K)	
<b>Main Material</b>	
Aluminum & Silica Gel	
<b>Color Temperature</b>	
3000K / 4000K / 6500K	
<b>CRI</b>	≥90
<b>Power Factor</b>	≥0.92
<b>Working Temperature</b>	-10°C~45°C
<b>Beam Angle (Optional)</b>	20°
<b>Fixture Dimmable</b>	Non-dimmable
<b>Electrical</b>	
<b>Protection class</b>	IP20



<b>Product Model No.</b>	AP-DZ-0044A-32W	
<b>Packaging Detail</b> 	120×70×6.5cm	
	STD PKG	1pcs
	N.W	1.5kgs
	G.W	3.56kgs

## AP-DZ-0044A-32W

DC27-40VDC32W LED 3000K/ PRI:2144lm220-240/ incl.V~50/60 Hz 0.20A  
Driver SEC: Constant Current: DC900mA

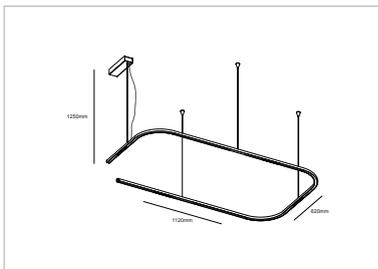

### Especially designed for:

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.



### Various Brand of SMT LED Light Source:



LED PENDANT  
LIGHT

TECHNICAL SPECIFICATIONS

<b>Input (Optional)</b>	220-240V~50/60 Hz
<b>Maximum Wattage</b>	35W±10% Max

<b>Number of LEDs</b>	30 LEDs SMT
-----------------------	-------------

<b>Luminous Flux</b>	2345LM (3000K)
----------------------	----------------

<b>Main Material</b>	Aluminum & Silica Gel
----------------------	-----------------------

<b>Color Temperature</b>	3000K / 4000K / 6500K
--------------------------	-----------------------

<b>CRI</b>	≥90
------------	-----

<b>Power Factor</b>	≥0.92
---------------------	-------

<b>Working Temperature</b>	-10°C~45°C
----------------------------	------------

<b>Beam Angle (Optional)</b>	20°
------------------------------	-----

<b>Fixture Dimmable</b>	Non-dimmable
-------------------------	--------------


<b>Electrical</b>	Internal Driver
<b>Protection class</b>	IP20



<b>Product Model No.</b>	AP-DZ-0045A-35W	
<b>Packaging Detail</b>	170×70×6.5cm	
	STD PKG	1pcs
	N.W	1.77kgs
	G.W	4.5kgs


**AP-DZ-0045A-35W**

DC25-36VDC35W LED 3000K/ PRI:2345lm220-240/ incl.V~50/60 Hz 0.22A  
Driver SEC: Constant Current: DC1050mA

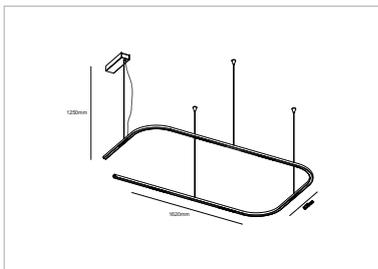


**Especially designed for:**

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.

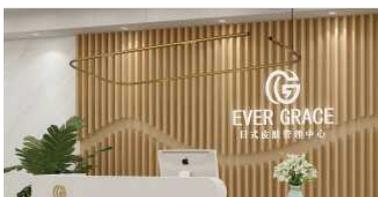

**Various Brand of SMT LED Light Source:**



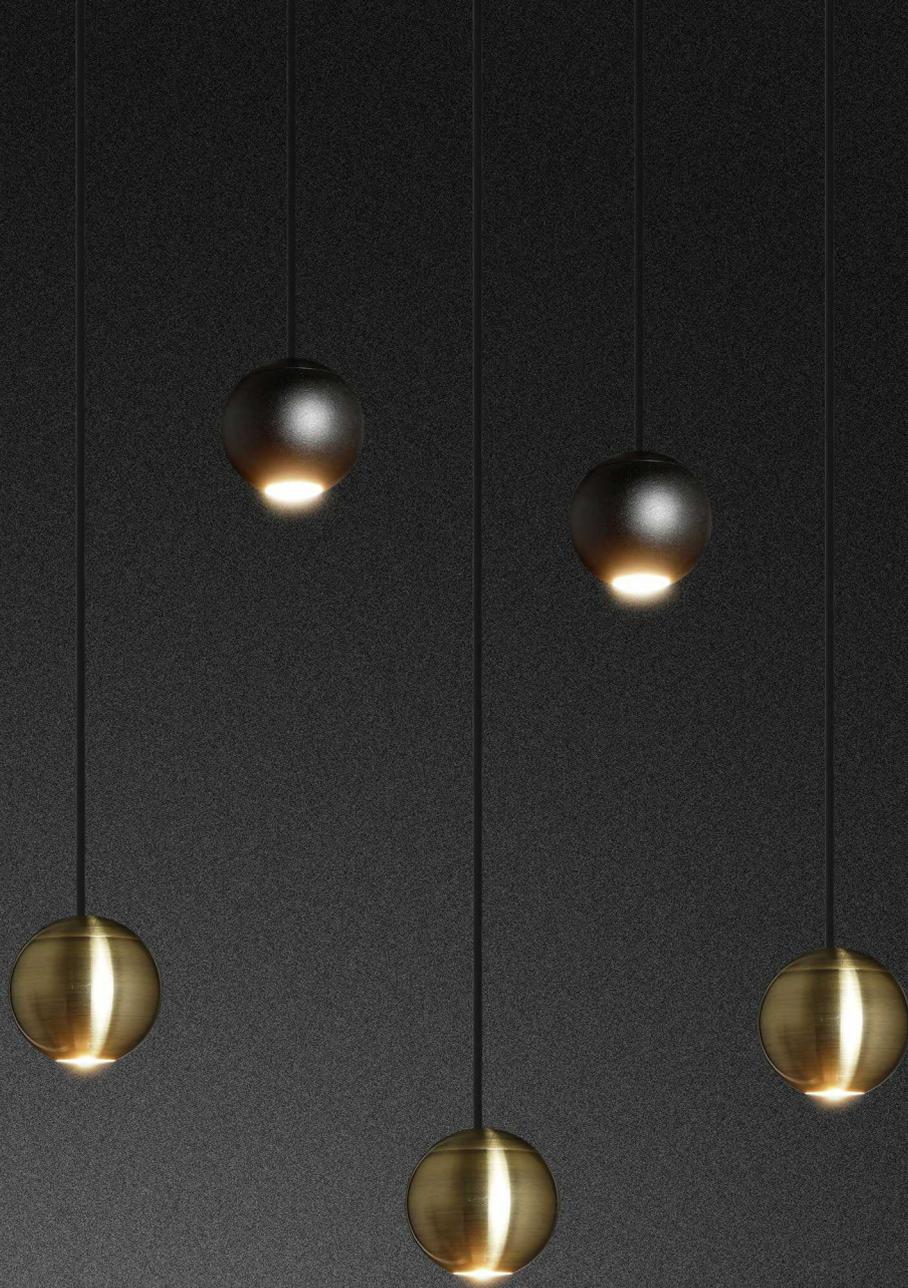

Product series


AP-DZ-0050A-7W



LED PENDANT  
LIGHT

TECHNICAL SPECIFICATIONS

<b>Input (Optional)</b>	220-240V~50/60 Hz
<b>Maximum Wattage</b>	7W±10% Max
<b>Number of LEDs</b>	
1 LEDs COB	
<b>Luminous Flux</b>	
357LM (3000K)	
<b>Main Material</b>	
Aluminum & PC Lens Diffuser	
<b>Color Temperature</b>	
3000K	
<b>CRI</b>	≥90
<b>Power Factor</b>	≥0.8
<b>Working Temperature</b>	-10°C~45°C
<b>Beam Angle (Optional)</b>	18°
<b>Fixture Dimmable</b>	Non-dimmable
<b>Electrical</b>	
Internal Driver	
<b>Protection class</b>	IP20

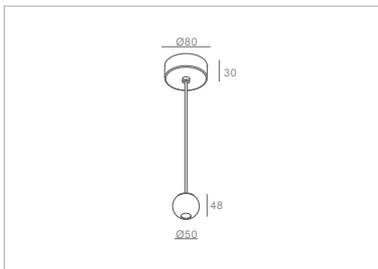

**Especially designed for:**

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.




<b>Product Model No.</b>	AP-DZ-0050A-7W	
<b>Packaging Detail</b> 	51.5×21.5×30.5cm	
	STD PKG	30pcs
	N.W	10.2kgs
	G.W	13.2kgs

**AP-DZ-0050A-7W**

DC8-12V7W LED 3000KDC / PRI:357lm220-240/ incl. V~50/60 Hz 0.050A  
Driver SEC: Constant Current: DC600mA



Warm White 3000K ∠ 18°

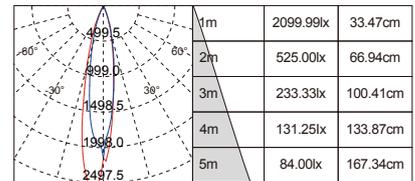

cd      Height      illuminance      Diameter

**Option colors**



**Various Brand of COB LED Light Source:**



LED PENDANT  
LIGHT

TECHNICAL SPECIFICATIONS

Input (Optional)	220-240V~50/60 Hz
Maximum Wattage	7W±10% Max

Number of LEDs	1 LEDs COB
----------------	------------

Luminous Flux	287LM (3000K)
---------------	---------------

Main Material	Aluminum & PC Lens Diffuser
---------------	-----------------------------

Color Temperature	3000K
-------------------	-------

CRI	≥90
-----	-----

Power Factor	≥0.8
--------------	------


Working Temperature	-10°C~45°C
---------------------	------------

Beam Angle (Optional)	18°
-----------------------	-----

Fixture Dimmable	Non-dimmable
------------------	--------------

Electrical	Internal Driver
------------	-----------------

Protection class	IP20
------------------	------

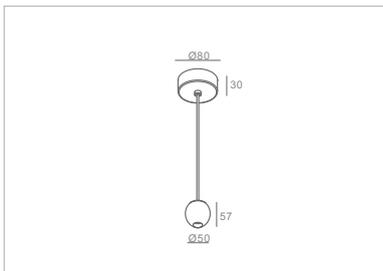

Especially designed for:

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.



Product Model No.	AP-DZ-0051A-7W	
Packaging Detail	51.5×21.5×30.5cm	
	STD PKG	30pcs
	N.W	10.8kgs
	G.W	13.8kgs


AP-DZ-0051A-7W

DC8-12V7W LED 3000KDC / PRI:287lm220-240/ incl. V~50/60 Hz 0.050A

Driver SEC: Constant Current: DC600mA



Warm White 3000K ∠ 18°

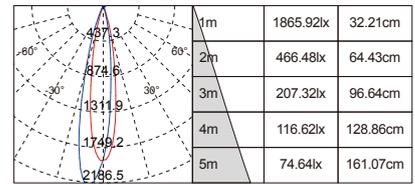

cd Height illuminance Diameter

Option colors



Various Brand of COB LED Light Source:





Product series

**AP-DZ-0060A-15W**



LED PENDANT  
LIGHT

TECHNICAL SPECIFICATIONS

Input (Optional)	220-240V~50/60 Hz
Maximum Wattage	15W±10% Max

Number of LEDs	75 LEDs SMD
----------------	-------------

Luminous Flux	1221LM (3000K)
---------------	----------------

Main Material	Iron & PMMA
---------------	-------------

Color Temperature	3000K / 4000K / 6500K
-------------------	-----------------------

CRI	≥90
-----	-----

Power Factor	≥0.92
--------------	-------


Working Temperature	-10°C~45°C
---------------------	------------

Beam Angle (Optional)	110°
-----------------------	------

Fixture Dimmable	Non-dimmable
------------------	--------------

Electrical	Internal Driver
------------	-----------------

Protection class	IP20
------------------	------

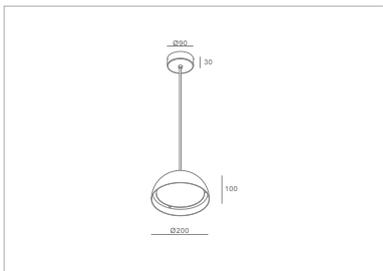

Product Model No.	AP-DZ-0060A-15W	
Packaging Detail	53×53×42cm	
	STD PKG	8pcs
	N.W	8.8kgs
	G.W	12.64kgs


AP-DZ-0060A-15W

DC30-42VDC15W LED 3000K/ PRI:1221lm220-240/ incl.V~50/60 Hz

Driver SEC: Constant Current: DC360mA



Warm White 3000K ∠110°

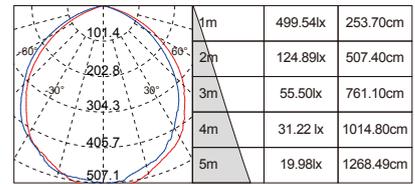

cd Height illuminance Diameter

Especially designed for:

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.



Various Brand of SMD LED Light Source:



LED PENDANT  
LIGHT

TECHNICAL SPECIFICATIONS

Input (Optional)	220-240V~50/60 Hz
Maximum Wattage	30W±10% Max

Number of LEDs	150LEDs SMD
----------------	-------------

Luminous Flux	2594LM (3000K)
---------------	----------------

Main Material	Iron & PMMA
---------------	-------------

Color Temperature	3000K / 4000K / 6500K
-------------------	-----------------------

CRI	≥90
-----	-----

Power Factor	≥0.92
--------------	-------


Working Temperature	-10°C~45°C
---------------------	------------

Beam Angle (Optional)	110°
-----------------------	------

Fixture Dimmable	Non-dimmable
------------------	--------------

Electrical	Internal Driver
------------	-----------------

Protection class	IP20
------------------	------

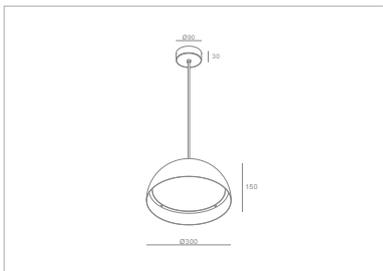

Product Model No.	AP-DZ-0061A-30W	
Packaging Detail	36.5×36×25.5cm	
	STD PKG	1pcs
	N.W	1.87kgs
	G.W	2.7kgs


AP-DZ-0061A-30W

DC30-42VDC30W LED 3000K/ PRI:2594lm220-240/ incl.V~50/60 Hz

Driver SEC: Constant Current: DC750mA



Warm White 3000K ∠110°

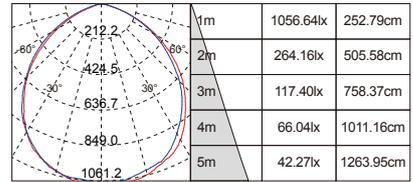

cd Height illuminance Diameter

Especially designed for:

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.



Various Brand of SMD LED Light Source:



LED PENDANT  
LIGHT

TECHNICAL SPECIFICATIONS

Input (Optional)	220-240V~50/60 Hz
Maximum Wattage	50W±10% Max

Number of LEDs	250 LEDs SMD
----------------	--------------

Luminous Flux	4430LM (3000K)
---------------	----------------

Main Material	Iron & PMMA
---------------	-------------

Color Temperature	3000K / 4000K / 6500K
-------------------	-----------------------

CRI	≥90
-----	-----

Power Factor	≥0.95
--------------	-------


Working Temperature	-10°C~45°C
---------------------	------------

Beam Angle (Optional)	110°
-----------------------	------

Fixture Dimmable	Non-dimmable
------------------	--------------

Electrical	Internal Driver
------------	-----------------

Protection class	IP20
------------------	------

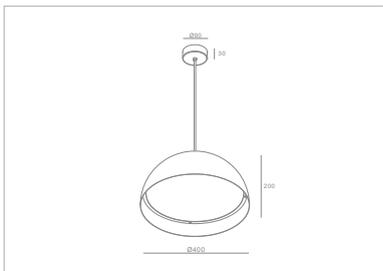


Product Model No.	AP-DZ-0062A-50W	
Packaging Detail	46.5×46×30.5cm	
	STD PKG	1pcs
	N.W	3.14kgs
	G.W	4.48kgs

AP-DZ-0062A-50W

DC30-42VDC50W LED 3000K/ PRI:4430lm220-240/ incl.V~50/60 Hz  
Driver SEC: Constant Current: DC1.3A



Warm White 3000K ∠110°

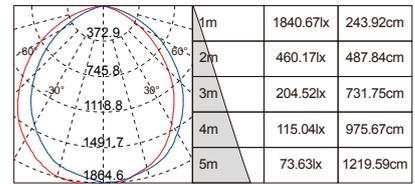

cd Height illuminance Diameter

Especially designed for:

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.



Various Brand of SMD LED Light Source:





Product series

**AP-DZ-0070A-7W**



LED PENDANT  
LIGHT

TECHNICAL SPECIFICATIONS

Input (Optional)	220-240V~50/60 Hz
Maximum Wattage	7W±10% Max

Number of LEDs	1 LEDs COB
----------------	------------

Luminous Flux	325LM (3000K)
---------------	---------------

Main Material	Aluminum & PC Lens Diffuser
---------------	-----------------------------

Color Temperature	3000K
-------------------	-------

CRI	≥80
-----	-----

Power Factor	≥0.8
--------------	------


Working Temperature	-10°C~45°C
---------------------	------------

Beam Angle (Optional)	18°
-----------------------	-----

Fixture Dimmable	Non-dimmable
------------------	--------------

Electrical	Internal Driver
------------	-----------------

Protection class	IP20
------------------	------

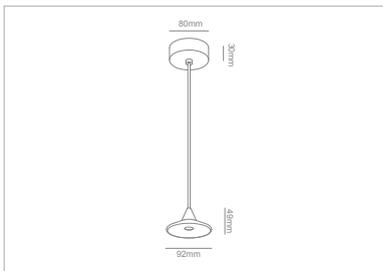

**Especially designed for:**

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.




Product Model No.	AP-DZ-0070A-7W	
Packaging Detail	45×41×41cm	
	STD PKG	18pcs
	N.W	6.63kgs
	G.W	9kgs

**AP-DZ-0070A-7W**

DC8-12V7W LED 3000KDC / PRI:325lm220-240/ incl. V~50/60 Hz 0.050A  
Driver SEC: Constant Current: DC600mA



Warm White 3000K ∠ 18°

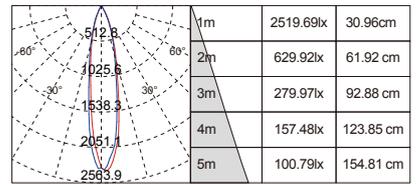


cd Height illuminance Diameter

**Option colors**



**Various Brand of COB LED Light Source:**



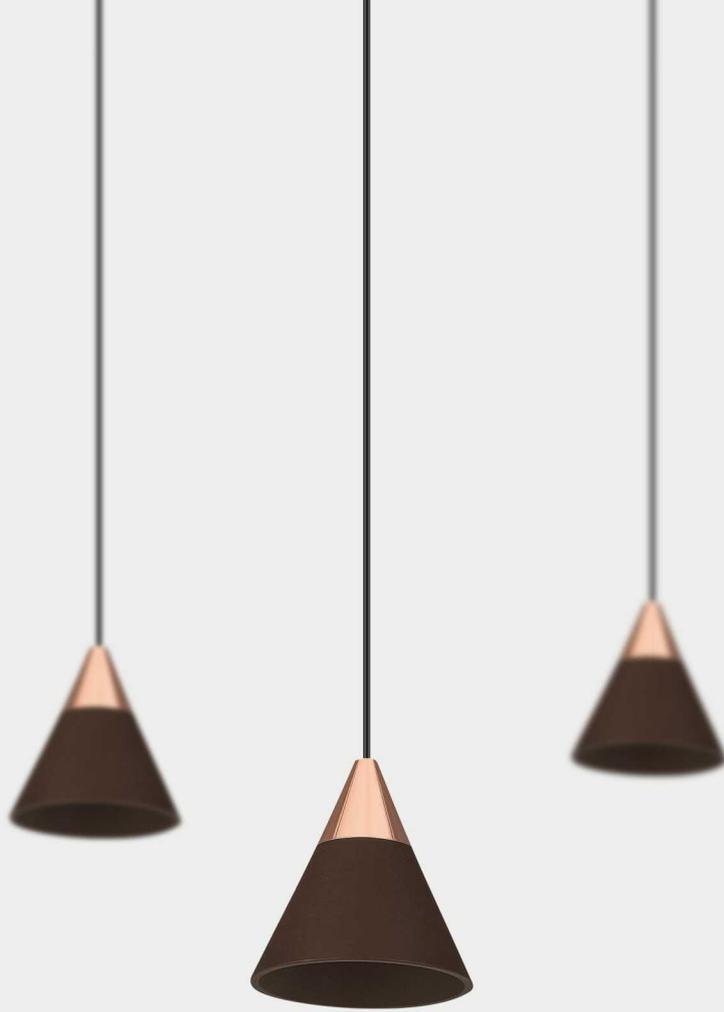

Product series

**AP-DZ-0071A-7W**



LED PENDANT  
LIGHT

TECHNICAL SPECIFICATIONS

Input (Optional)	220-240V~50/60 Hz
Maximum Wattage	7W±10% Max

Number of LEDs	1 LEDs COB
----------------	------------

Luminous Flux	305LM (3000K)
---------------	---------------

Main Material	Aluminum & PC Lens Diffuser
---------------	-----------------------------

Color Temperature	3000K
-------------------	-------

CRI	≥80
-----	-----

Power Factor	≥0.8
--------------	------


Working Temperature	-10°C~45°C
---------------------	------------

Beam Angle (Optional)	18°
-----------------------	-----

Fixture Dimmable	Non-dimmable
------------------	--------------

Electrical	Internal Driver
------------	-----------------

Protection class	IP20
------------------	------

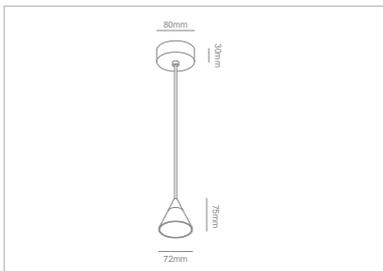


Product Model No.	AP-DZ-0071A-7W	
Packaging Detail 	45×41×41cm	
	STD PKG	18pcs
	N.W	5.8kgs
	G.W	7.5kgs

AP-DZ-0071A-7W

DC8-12VDC7W LED 3000K/ PRI:305lm220-240/ incl.V~-50/60 Hz 0.050A  
Driver SEC: Constant Current: DC600mA



Warm White 3000K ∠ 18°

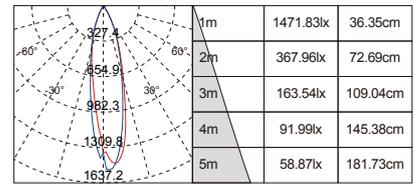

cd Height illuminance Diameter

Especially designed for:

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.



Various Brand of COB LED Light Source:





Product series

AP-DZ-0072-7W



LED PENDANT  
LIGHT

TECHNICAL SPECIFICATIONS

Input (Optional)	220-240V~50/60 Hz
Maximum Wattage	7W±10% Max

Number of LEDs	1 LED COB
----------------	-----------

Luminous Flux	375LM (3000K)
---------------	---------------

Main Material	Aluminum & PC Lens Diffuser
---------------	-----------------------------

Color Temperature	3000K
-------------------	-------

CRI	≥90
-----	-----

Power Factor	≥0.8
--------------	------


Working Temperature	-10°C~45°C
---------------------	------------

Beam Angle (Optional)	18°
-----------------------	-----

Fixture Dimmable	Non-dimmable
------------------	--------------

Electrical	Internal Driver
------------	-----------------

Protection class	IP20
------------------	------

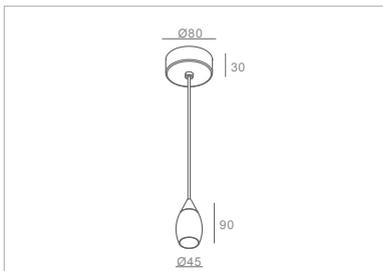

**Especially designed for:**

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.




Product Model No.	AP-DZ-0072-7W	
Packaging Detail	45×45×41cm	
	STD PKG	18pcs
	N.W	6.34kgs
	G.W	9.34kgs

**AP-DZ-0072-7W**

DC30-42V7W LED 3000KDC / PRI:375lm220-240/ incl. -V~ 50/60 Hz 0.050A  
Driver SEC: Constant Current: DC170mA



Warm White 3000K ∠ 18°

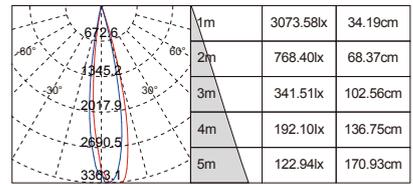

cd      Height      illuminance      Diameter

**Option colors**



**Various Brand of COB LED Light Source:**



LED PENDANT  
LIGHT

TECHNICAL SPECIFICATIONS

Input (Optional)	220-240V~50/60 Hz
Maximum Wattage	7W±10% Max

Number of LEDs	1 LED COB
----------------	-----------

Luminous Flux	486LM (3000K)
---------------	---------------

Main Material	Aluminum & PC Lens Diffuser
---------------	-----------------------------

Color Temperature	3000K
-------------------	-------

CRI	≥90
-----	-----

Power Factor	≥0.8
--------------	------


Working Temperature	-10°C~45°C
---------------------	------------

Beam Angle (Optional)	18°
-----------------------	-----

Fixture Dimmable	Non-dimmable
------------------	--------------

Electrical	Internal Driver
------------	-----------------

Protection class	IP20
------------------	------

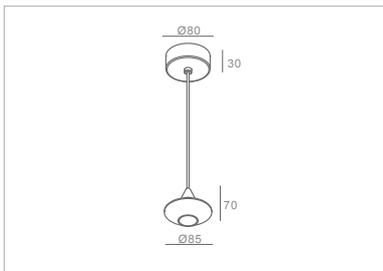

Especially designed for:

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.




Product Model No.	AP-DZ-0073-7W	
Packaging Detail	45×45×41cm	
	STD PKG	12pcs
	N.W	9.13kgs
	G.W	12.13kgs

AP-DZ-0073-7W

DC30-42V7W LED 3000KDC / PRI:486lm220-240/ incl. -V~ 50/60 Hz 0.050A  
Driver SEC: Constant Current: DC170mA



Warm White 3000K ∠ 18°

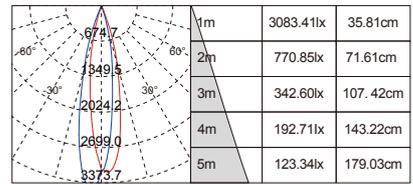

cd Height illuminance Diameter

Option colors



Various Brand of COB LED Light Source:





Product series

**AP-DZ-0090-7W**



LED PENDANT  
LIGHT

TECHNICAL SPECIFICATIONS

Input (Optional)	220-240V~50/60 Hz
Maximum Wattage	7W±10% Max

Number of LEDs	1 LED COB
----------------	-----------

Luminous Flux	476LM (3000K)
---------------	---------------

Main Material	Aluminum & PC Lens Diffuser
---------------	-----------------------------

Color Temperature	3000K
-------------------	-------

CRI	≥90
-----	-----

Power Factor	≥0.8
--------------	------


Working Temperature	-10°C~45°C
---------------------	------------

Beam Angle (Optional)	24°
-----------------------	-----

Fixture Dimmable	Non-dimmable
------------------	--------------

Electrical	Internal Driver
------------	-----------------

Protection class	IP20
------------------	------

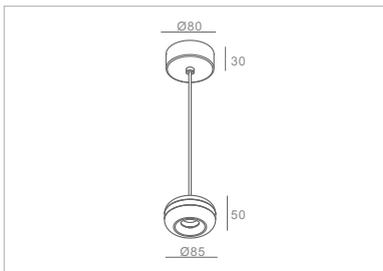

Especially designed for:

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.




Product Model No.	AP-DZ-0090-7W	
Packaging Detail	39.5×26.5×30cm	
	STD PKG	12pcs
	N.W	5kgs
	G.W	6.5kgs

AP-DZ-0090-7W

DC30-42V7W LED 3000KDC / PRI:476lm220-240/ incl. -V~ 50/60 Hz 0.050A  
Driver SEC: Constant Current: DC170mA



Warm White 3000K ∠24°

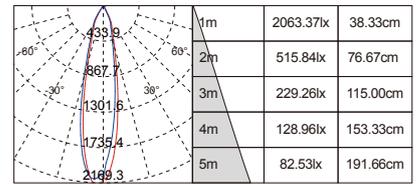

cd Height illuminance Diameter

Option colors



Various Brand of COB LED Light Source:



LED PENDANT  
LIGHT

TECHNICAL SPECIFICATIONS

Input (Optional)	220-240V~50/60 Hz
Maximum Wattage	10W±10% Max

Number of LEDs	1 LED COB
----------------	-----------

Luminous Flux	766LM (3000K)
---------------	---------------

Main Material	Aluminum & PC Lens Diffuser
---------------	-----------------------------

Color Temperature	3000K
-------------------	-------

CRI	≥90
-----	-----

Power Factor	≥0.92
--------------	-------


Working Temperature	-10°C~45°C
---------------------	------------

Beam Angle (Optional)	25°
-----------------------	-----

Fixture Dimmable	Non-dimmable
------------------	--------------

Electrical	Internal Driver
------------	-----------------

Protection class	IP20
------------------	------

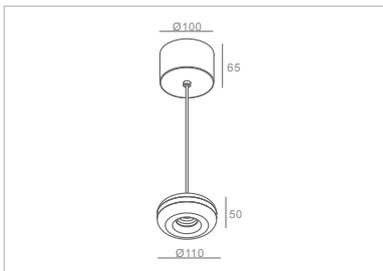

Especially designed for:

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.



Product Model No.	AP-DZ-0091-10W	
Packaging Detail	33×32.5×37cm	
	STD PKG	8pcs
	N.W	5.42kgs
	G.W	7.4kgs




AP-DZ-0091-10W

DC30-42V7W LED 3000KDC / PRI:766lm220-240/ incl. -V~ 50/60 Hz 0.065A  
Driver SEC: Constant Current: DC250mA



Warm White 3000K ∠ 25°

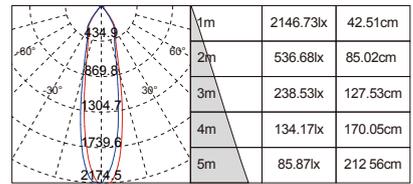

cd Height illuminance Diameter

Option colors



Various Brand of COB LED Light Source:



LED PENDANT  
LIGHT

TECHNICAL SPECIFICATIONS

Input (Optional)	220-240V~50/60 Hz
Maximum Wattage	15W±10% Max

Number of LEDs	1 LED COB
----------------	-----------

Luminous Flux	965LM (3000K)
---------------	---------------

Main Material	Aluminum & PC Lens Diffuser
---------------	-----------------------------

Color Temperature	3000K
-------------------	-------

CRI	≥90
-----	-----

Power Factor	≥0.92
--------------	-------


Working Temperature	-10°C~45°C
---------------------	------------

Beam Angle (Optional)	25°
-----------------------	-----

Fixture Dimmable	Non-dimmable
------------------	--------------

Electrical	Internal Driver
------------	-----------------

Protection class	IP20
------------------	------

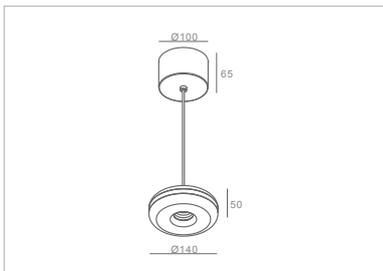

Especially designed for:

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.




Product Model No.	AP-DZ-0092-15W	
Packaging Detail	39.5×38.5×37cm	
	STD PKG	8pcs
	N.W	7.23kgs
	G.W	9kgs

AP-DZ-0092-15W

7WDC30-42VLED 3000KDC / 965lmPRI: 220-240/ incl. - DriverV~ 50/60SEC:HzConstant0.088A Current: DC360mA



Warm White 3000K ∠ 25°

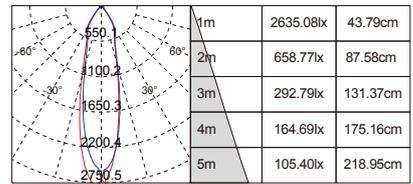

cd Height illuminance Diameter

Option colors



Various Brand of COB LED Light Source:





Product series

**AP-DZ-0120A-15W**



LED PENDANT  
LIGHT

TECHNICAL SPECIFICATIONS

Input (Optional)	220-240V~50/60 Hz
Maximum Wattage	15W±10% Max

Number of LEDs	1 LEDs COB
----------------	------------

Luminous Flux	1275LM (3000K)
---------------	----------------

Main Material	Iron & PMMA
---------------	-------------

Color Temperature	3000K / 4000K / 6500K
-------------------	-----------------------

CRI	≥90
-----	-----

Power Factor	≥0.92
--------------	-------


Working Temperature	-10°C~45°C
---------------------	------------

Beam Angle (Optional)	65°
-----------------------	-----

Fixture Dimmable	Non-dimmable
------------------	--------------

Electrical	Internal Driver
------------	-----------------

Protection class	IP44
------------------	------

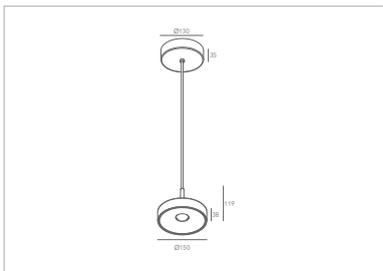


Product Model No.	AP-DZ-0120A-15W	
Packaging Detail	56×38×39.5cm	
	STD PKG	18pcs
	N.W	18kgs
	G.W	20kgs

AP-DZ-0120A-15W

DC30-42VDC15W LED 3000K/ PRI:1275lm220-240/ incl.V~50/60 Hz 0.088A  
Driver SEC: Constant Current: DC360mA



Warm White 3000K ∠65°

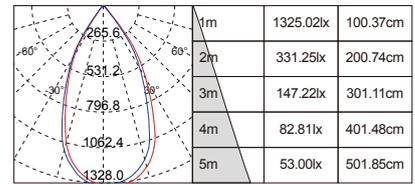

cd Height illuminance Diameter

Especially designed for:

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.



Various Brand of COB LED Light Source:



LED PENDANT  
LIGHT

TECHNICAL SPECIFICATIONS

Input (Optional)	220-240V~50/60 Hz
Maximum Wattage	15W±10% Max

Number of LEDs	1 LEDs COB
----------------	------------

Luminous Flux	1275LM (3000K)
---------------	----------------

Main Material	Iron & PMMA
---------------	-------------

Color Temperature	3000K / 4000K / 6500K
-------------------	-----------------------

CRI	≥90
-----	-----

Power Factor	≥0.92
--------------	-------

Working Temperature	-10°C~45°C
---------------------	------------

Beam Angle (Optional)	65°
-----------------------	-----

Fixture Dimmable	Non-dimmable
------------------	--------------

Electrical	Internal Driver
------------	-----------------




Product Model No.	AP-DZ-0121A-15W	
Packaging Detail	56×38×39.5cm	
	STD PKG	18pcs
	N.W	13.86kgs
	G.W	15.86kgs

AP-DZ-0121A-15W


DC30-42VDC15W LED 3000K/ PRI:1275lm220-240/ incl.V~50/60 Hz 0.088A  
Driver SEC: Constant Current: DC360mA



Warm White 3000K ∠65°

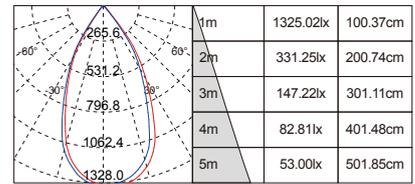

cd Height illuminance Diameter

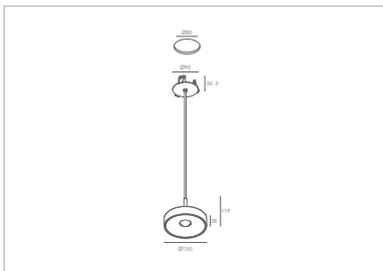

Especially designed for:

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.




Various Brand of COB LED Light Source:



LED PENDANT  
LIGHT

TECHNICAL SPECIFICATIONS	
Input (Optional)	220-240V~50/60 Hz
Maximum Wattage	24W±10% Max
Number of LEDs	
1 LEDs COB	
Luminous Flux	
2040LM (3000K)	
Main Material	
Iron & PMMA	
Color Temperature	
3000K / 4000K / 6500K	

CRI	≥90
Power Factor	≥0.92
Working Temperature	-10°C~45°C
Beam Angle (Optional)	65°
Fixture Dimmable	Non-dimmable
Electrical	Internal Driver
Protection class	IP44

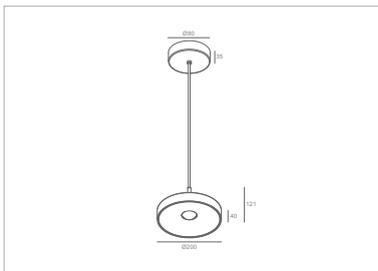


Product Model No.	AP-DZ-0122A-24W	
Packaging Detail	48×48×39.5cm	
	STD PKG	12pcs
	N.W	14.76kgs
	G.W	16.76kgs

## AP-DZ-0122A-24W

DC27-40VDC30W LED 3000K/ PRI:2040lm220-240/ incl.V~50/60 Hz 0.135A  
Driver SEC: Constant Current: DC600mA



Warm White 3000K ∠65°

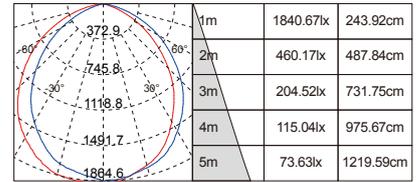

cd Height illuminance Diameter

### Especially designed for:

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.



### Various Brand of COB LED Light Source:



LED PENDANT  
LIGHT

TECHNICAL SPECIFICATIONS

Input (Optional)	220-240V~50/60 Hz
Maximum Wattage	24W±10% Max

Number of LEDs	1 LEDs COB
----------------	------------

Luminous Flux	2040LM (3000K)
---------------	----------------

Main Material	Iron & PMMA
---------------	-------------

Color Temperature	3000K / 4000K / 6500K
-------------------	-----------------------

CRI	≥90
-----	-----

Power Factor	≥0.92
--------------	-------


Working Temperature	-10°C~45°C
---------------------	------------

Beam Angle (Optional)	65°
-----------------------	-----

Fixture Dimmable	Non-dimmable
------------------	--------------

Electrical	Internal Driver
------------	-----------------

Protection class	IP44
------------------	------

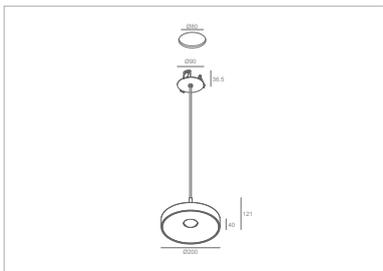


Product Model No.	AP-DZ-0123A-24W	
Packaging Detail	48×48×39.5cm	
	STD PKG	12pcs
	N.W	13.2kgs
	G.W	15.2kgs

Driver SEC: Constant Current: DC600mA



Warm White 3000K ∠65°

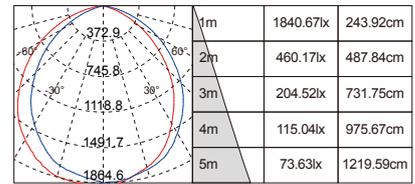

cd Height illuminance Diameter

AP-DZ-0123A-24W

DC27-40VDC30W LED 3000K/ PRI:2040lm220-240/ incl.V~50/60 Hz 0.135A

Especially designed for:

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.



Various Brand of COB LED Light Source:



LED PENDANT  
LIGHT

TECHNICAL SPECIFICATIONS

Input (Optional)	220-240V~50/60 Hz
Maximum Wattage	30W±10% Max

Number of LEDs	1 LEDs COB
----------------	------------

Luminous Flux	2550LM (3000K)
---------------	----------------

Main Material	Iron & PMMA
---------------	-------------

Color Temperature	3000K / 4000K / 6500K
-------------------	-----------------------

CRI	≥90
-----	-----

Power Factor	≥0.92
--------------	-------


Working Temperature	-10°C~45°C
---------------------	------------

Beam Angle (Optional)	65°
-----------------------	-----

Fixture Dimmable	Non-dimmable
------------------	--------------

Electrical	Internal Driver
------------	-----------------

Protection class	IP44
------------------	------

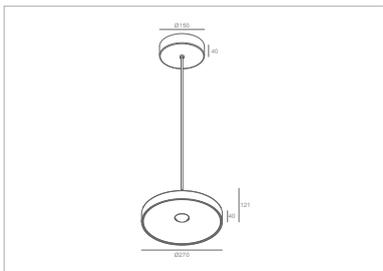

Product Model No.	AP-DZ-0124A-30W	
Packaging Detail	62×62×28cm	
	STD PKG	8pcs
	N.W	13.6kgs
	G.W	15.6kgs

AP-DZ-0124A-30W

DC30-42VDC30W LED 3000K/ PRI:2550lm220-240/ incl.V~50/60 Hz 0.170A  
Driver SEC: Constant Current: DC750mA



Warm White 3000K ∠65°

Height	illuminance	Diameter
1m	2452.31lx	140.04cm
2m	613.08lx	280.08cm
3m	272.48lx	420.12cm
4m	153.27lx	560.17cm
5m	98.09lx	700.21cm

Especially designed for:

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.



Various Brand of COB LED Light Source:



LED PENDANT  
LIGHT

TECHNICAL SPECIFICATIONS

Input (Optional)	220-240V~50/60 Hz
Maximum Wattage	30W±10% Max

Number of LEDs	1 LEDs COB
----------------	------------

Luminous Flux	2550LM (3000K)
---------------	----------------

Main Material	Iron & PMMA
---------------	-------------

Color Temperature	3000K / 4000K / 6500K
-------------------	-----------------------

CRI	≥90
-----	-----

Power Factor	≥0.92
--------------	-------


Working Temperature	-10°C~45°C
---------------------	------------

Beam Angle (Optional)	65°
-----------------------	-----

Fixture Dimmable	Non-dimmable
------------------	--------------

Electrical	Internal Driver
------------	-----------------

Protection class	IP44
------------------	------

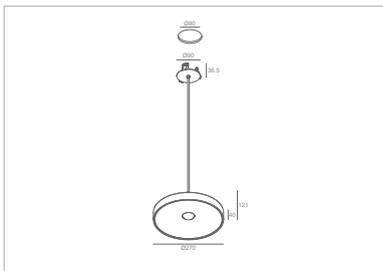

Product Model No.	AP-DZ-0125A-30W	
Packaging Detail	62×62×28cm	
	STD PKG	8pcs
	N.W	12kgs
	G.W	14kgs


AP-DZ-0125A-30W

DC30-42VDC30W LED 3000K/ PRI:2550lm220-240/ incl.V~50/60 Hz 0.170A

Driver SEC: Constant Current: DC750mA



Warm White 3000K ∠65°

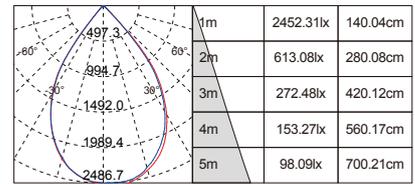

cd Height illuminance Diameter

Especially designed for:

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.




Various Brand of COB LED Light Source:



Product series

# AP-DZ-0130A-24W

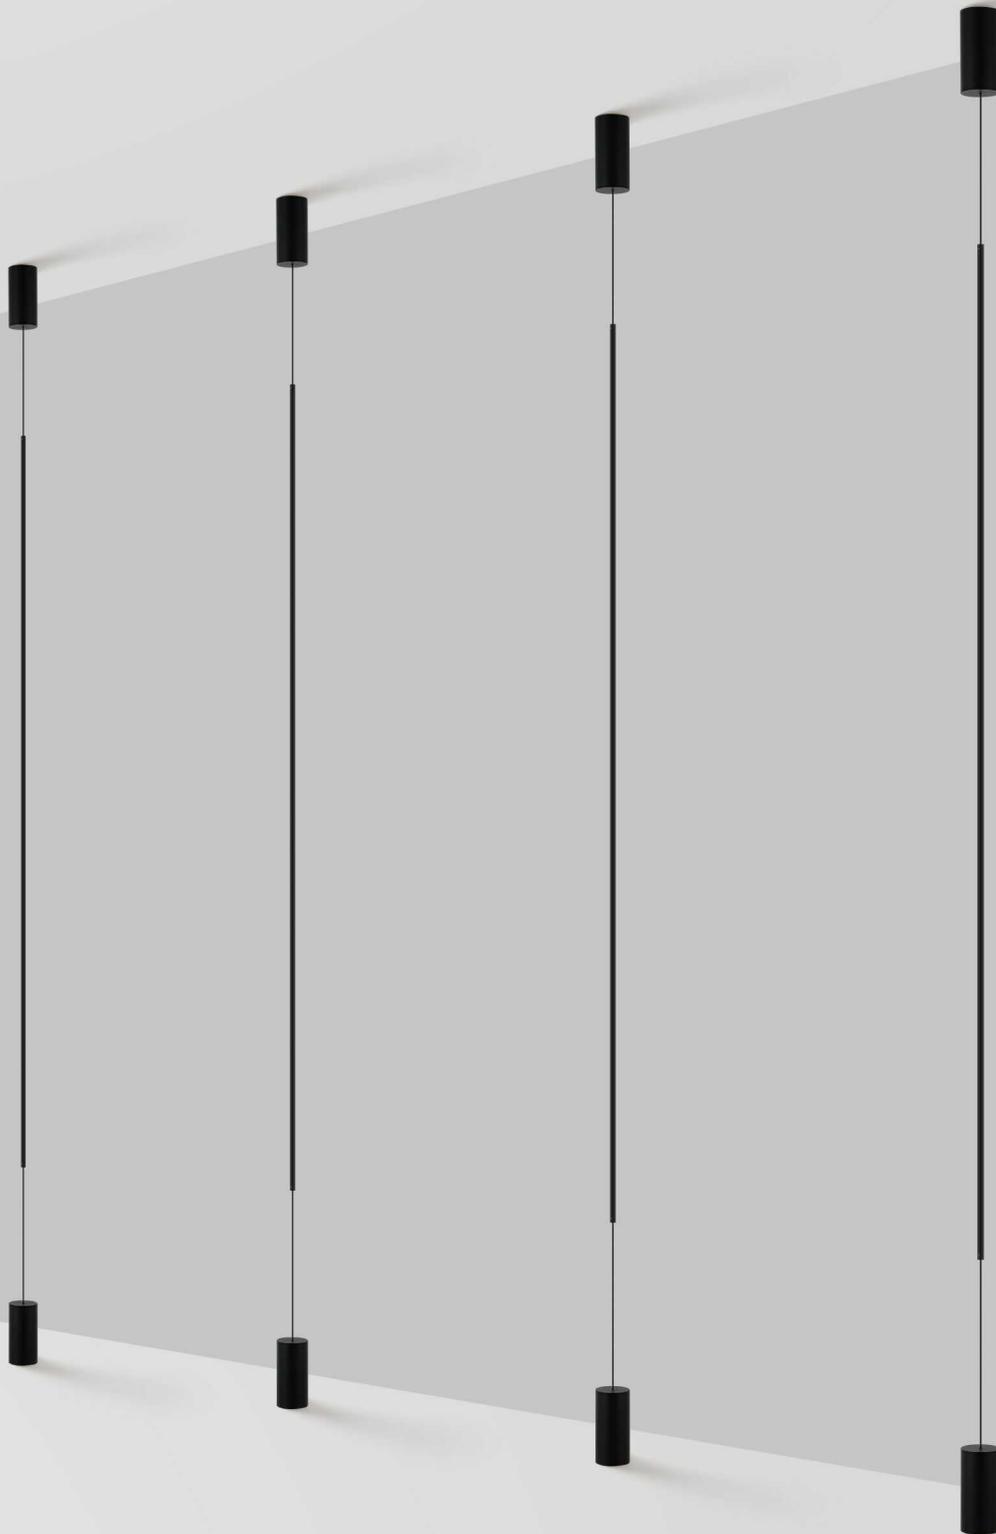

LED PENDANT  
LIGHT

TECHNICAL SPECIFICATIONS

Input (Optional)	220-240V~50/60 Hz
Maximum Wattage	24W±10% Max

Number of LEDs	144 LEDs SMD
----------------	--------------

Luminous Flux	65LM/W
---------------	--------

Main Material	Aluminum & Silica Gel
---------------	-----------------------

Color Temperature	3000K / 4000K / 6500K
-------------------	-----------------------

CRI	≥90
-----	-----


Power Factor	≥0.92
--------------	-------

Working Temperature	-10°C~45°C
---------------------	------------

Beam Angle (Optional)	110°
-----------------------	------

Fixture Dimmable	Non-dimmable
------------------	--------------

Electrical	Internal Driver
Protection class	IP20



Product Model No.	AP-DZ-0130A-24W	
Packaging Detail	9×8.3×160cm	
	STD PKG	1pcs
	N.W	1.15kgs
	G.W	2.63kgs

AP-DZ-0130A-24W

24WPRI: 220-240LED 3000KV~ 50/6065LM/WHz /0.135Aincl. -  
Driver SEC: Constant Current: DC600mA



Especially designed for:

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.




Various Brand of SMD LED Light Source:



LED PENDANT  
LIGHT

TECHNICAL SPECIFICATIONS

<b>Input (Optional)</b>	220-240V~50/60 Hz
<b>Maximum Wattage</b>	15W±10% Max
<b>Number of LEDs</b>	
96 LEDs SMD	
<b>Luminous Flux</b>	
65LM/W (3000K)	
<b>Main Material</b>	
Aluminum & Silica Gel	
<b>Color Temperature</b>	
3000K / 4000K / 6500K	
<b>CRI</b>	≥90
<b>Power Factor</b>	≥0.92
<b>Working Temperature</b>	-10°C~45°C
<b>Beam Angle (Optional)</b>	20°
<b>Fixture Dimmable</b>	Non-dimmable
<b>Electrical</b>	
<b>Protection class</b>	IP20

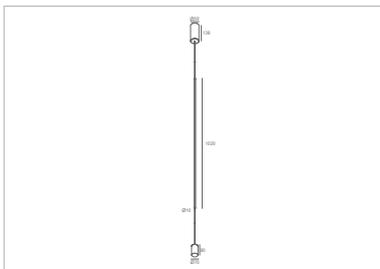

<b>Product Model No.</b>	AP-DZ-0131A-15W	
<b>Packaging Detail</b>	9×8.3×110cm	
	STD PKG	1pcs
	N.W	1.5kgs
	G.W	3.56kgs

**AP-DZ-0131A-15W**

15WPRI: 220-240LED 3000KV~ 50/6065LM/WHz /0.088Aincl. - Driver SEC: Constant Current: DC600mA

**Especially designed for:**

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.



**Various Brand of SMD LED Light Source:**



LED PENDANT  
LIGHT

TECHNICAL SPECIFICATIONS

<b>Input (Optional)</b>	220-240V~50/60 Hz
<b>Maximum Wattage</b>	24W±10% Max

<b>Number of LEDs</b>	144 LEDs SMD
-----------------------	--------------

<b>Luminous Flux</b>	65LM/W (3000K)
----------------------	----------------

<b>Main Material</b>	Aluminum & Silica Gel
----------------------	-----------------------

<b>Color Temperature</b>	3000K / 4000K / 6500K
--------------------------	-----------------------

<b>CRI</b>	≥90
------------	-----


<b>Power Factor</b>	≥0.92
---------------------	-------

<b>Working Temperature</b>	-10°C~45°C
----------------------------	------------

<b>Beam Angle (Optional)</b>	110°
------------------------------	------

<b>Fixture Dimmable</b>	Non-dimmable
-------------------------	--------------

<b>Electrical</b>	Internal Driver
<b>Protection class</b>	IP20

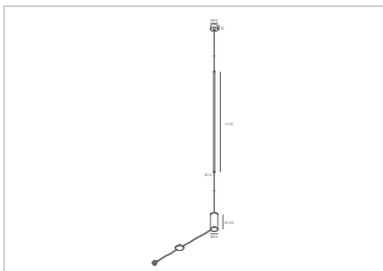

<b>Product Model No.</b>	AP-DZ-0132A-24W	
<b>Packaging Detail</b>	9×8.3×160cm	
	STD PKG	1pcs
	N.W	1.77kgs
	G.W	4.5kgs

**AP-DZ-0132A-24W**

24WPRI: 220-240LED 3000KV~ 50/6065LM/WHZ /0.135Aincl. - Driver SEC: Constant Current: DC600mA

**Especially designed for:**

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.



**Various Brand of SMD LED Light Source:**



LED PENDANT  
LIGHT

TECHNICAL SPECIFICATIONS

<b>Input (Optional)</b>	220-240V~50/60 Hz
<b>Maximum Wattage</b>	15W±10% Max

<b>Number of LEDs</b>	96 LEDs SMD
-----------------------	-------------

<b>Luminous Flux</b>	65LM/W (3000K)
----------------------	----------------

<b>Main Material</b>	Aluminum & Silica Gel
----------------------	-----------------------

<b>Color Temperature</b>	3000K / 4000K / 6500K
--------------------------	-----------------------

<b>CRI</b>	≥90
------------	-----


<b>Power Factor</b>	≥0.92
---------------------	-------

<b>Working Temperature</b>	-10°C~45°C
----------------------------	------------

<b>Beam Angle (Optional)</b>	20°
------------------------------	-----

<b>Fixture Dimmable</b>	Non-dimmable
-------------------------	--------------

<b>Electrical</b>	Internal Driver
<b>Protection class</b>	IP20

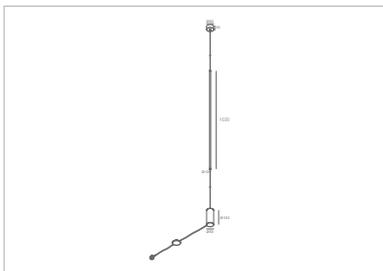

<b>Product Model No.</b>	AP-DZ-0133A-15W	
<b>Packaging Detail</b>	9×8.3×110cm	
	STD PKG	1pcs
	N.W	1.5kgs
	G.W	3.56kgs

AP-DZ-0133A-15W

15WPRI: 220-240LED 3000KV~ 50/6065LM/WHZ /0.088Aincl. - Driver SEC: Constant Current: DC600mA

Especially designed for:

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.



Various Brand of SMD LED Light Source:





Product series

**AP-DZ-0140A-10W**



LED PENDANT  
LIGHT

TECHNICAL SPECIFICATIONS

Input (Optional)	220-240V~50/60 Hz
Maximum Wattage	10W±10% Max

Number of LEDs	3 LEDs COB
----------------	------------

Luminous Flux	686LM (3000K)
---------------	---------------

Main Material	Aluminum & PC Lens Diffuser
---------------	-----------------------------

Color Temperature	3000K / 4000K / 6500K
-------------------	-----------------------

CRI	≥90
-----	-----

Power Factor	≥0.92
--------------	-------


Working Temperature	-10°C~45°C
---------------------	------------

Beam Angle (Optional)	15°
-----------------------	-----

Fixture Dimmable	Non-dimmable
------------------	--------------


Electrical	Internal Driver
------------	-----------------

Protection class	IP20
------------------	------

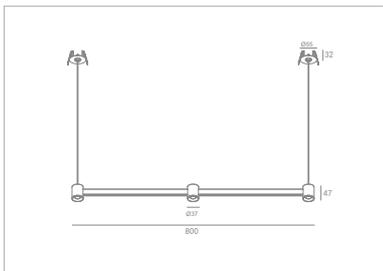

Especially designed for:

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.




Product Model No.	AP-DZ-0140A-10W	
Packaging Detail	98×8.5×9.5cm	
	STD PKG	1pcs
	N.W	0.7kgs
	G.W	2.7kgs

AP-DZ-0140A-10W

DC36V10W LEDDC3000K/ PRI: 686lm220-240/ incl.V~ 50/60-Hz  
Driver SEC: Constant Current: DC250mA



Warm White 3000K ∠ 15°

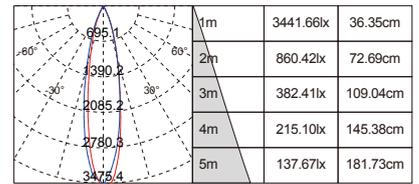

cd Height illuminance Diameter

Option colors



Various Brand of COB LED Light Source:



LED PENDANT  
LIGHT

TECHNICAL SPECIFICATIONS

Input (Optional)	220-240V~50/60 Hz
Maximum Wattage	10W±10% Max

Number of LEDs	3 LEDs COB
----------------	------------

Luminous Flux	686LM (3000K)
---------------	---------------

Main Material	Aluminum & PC Lens Diffuser
---------------	-----------------------------

Color Temperature	3000K / 4000K / 6500K
-------------------	-----------------------

CRI	≥90
-----	-----

Power Factor	≥0.92
--------------	-------


Working Temperature	-10°C~45°C
---------------------	------------

Beam Angle (Optional)	15°
-----------------------	-----

Fixture Dimmable	Non-dimmable
------------------	--------------


Electrical	Internal Driver
------------	-----------------

Protection class	IP20
------------------	------

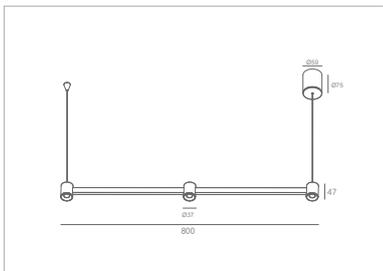

Especially designed for:

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.



Product Model No.	AP-DZ-0141A-10W	
Packaging Detail	98×8.5×9.5cm	
	STD PKG	1pcs
	N.W	0.8kgs
	G.W	2.8kgs


AP-DZ-0141A-10W

DC36V10W LEDDC3000K/ PRI: 686lm220-240/ incl.V~ 50/60-Hz

Driver SEC: Constant Current: DC250mA



Warm White 3000K ∠ 15°

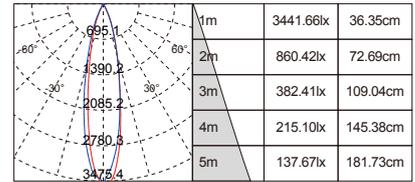

cd Height illuminance Diameter

Option colors



Various Brand of COB LED Light Source:



LED PENDANT  
LIGHT

TECHNICAL SPECIFICATIONS

Input (Optional)	220-240V~50/60 Hz
Maximum Wattage	15W±10% Max

Number of LEDs	4 LEDs COB
----------------	------------

Luminous Flux	912LM (3000K)
---------------	---------------

Main Material	Aluminum & PC Lens Diffuser
---------------	-----------------------------

Color Temperature	3000K / 4000K / 6500K
-------------------	-----------------------

CRI	≥90
-----	-----

Power Factor	≥0.92
--------------	-------


Working Temperature	-10°C~45°C
---------------------	------------

Beam Angle (Optional)	15°
-----------------------	-----

Fixture Dimmable	Non-dimmable
------------------	--------------


Electrical	Internal Driver
------------	-----------------

Protection class	IP20
------------------	------

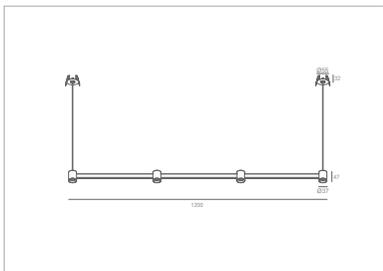

Especially designed for:

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.




Product Model No.	AP-DZ-0142A-15W	
Packaging Detail	138×8.5×9.5cm	
	STD PKG	1pcs
	N.W	0.92kgs
	G.W	2.92kgs

AP-DZ-0142A-15W

15WDC36VLEDDC3000K/ PRI: 912lm220-240/ incl.V~ -50/60DriverHzSEC: Constant Current: DC360mA



Warm White 3000K ∠ 15°

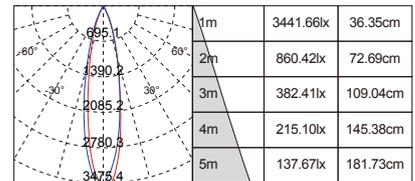

cd Height illuminance Diameter

Option colors



Various Brand of COB LED Light Source:



LED PENDANT  
LIGHT

TECHNICAL SPECIFICATIONS

Input (Optional)	220-240V~50/60 Hz
Maximum Wattage	15W±10% Max

Number of LEDs	4 LEDs COB
----------------	------------

Luminous Flux	912LM (3000K)
---------------	---------------

Main Material	Aluminum & PC Lens Diffuser
---------------	-----------------------------

Color Temperature	3000K / 4000K / 6500K
-------------------	-----------------------

CRI	≥90
-----	-----

Power Factor	≥0.92
--------------	-------


Working Temperature	-10°C~45°C
---------------------	------------

Beam Angle (Optional)	15°
-----------------------	-----

Fixture Dimmable	Non-dimmable
------------------	--------------


Electrical	Internal Driver
------------	-----------------

Protection class	IP20
------------------	------

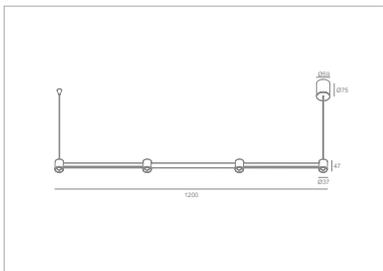

Especially designed for:

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.




Product Model No.	AP-DZ-0143A-15W	
Packaging Detail	138×8.5×9.5cm	
	STD PKG	1pcs
	N.W	1.02kgs
	G.W	3.02kgs

AP-DZ-0143A-15W

15WDC36VLEDDC3000K/ PRI: 912lm220-240/ incl.V~ -50/60DriverHzSEC: Constant Current: DC360mA



Warm White 3000K ∠ 15°

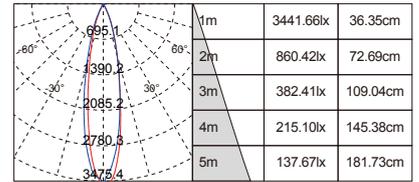

cd Height illuminance Diameter

Option colors



Various Brand of COB LED Light Source:



LED PENDANT  
LIGHT

TECHNICAL SPECIFICATIONS

Input (Optional)	220-240V~50/60 Hz
Maximum Wattage	20W±10% Max

Number of LEDs	5 LEDs COB
----------------	------------

Luminous Flux	1140LM (3000K)
---------------	----------------

Main Material	Aluminum & PC Lens Diffuser
---------------	-----------------------------

Color Temperature	3000K / 4000K / 6500K
-------------------	-----------------------

CRI	≥90
-----	-----


Power Factor	≥0.92
--------------	-------

Working Temperature	-10°C~45°C
---------------------	------------

Beam Angle (Optional)	15°
-----------------------	-----


Fixture Dimmable	Non-dimmable
------------------	--------------

Electrical	Internal Driver
Protection class	IP20

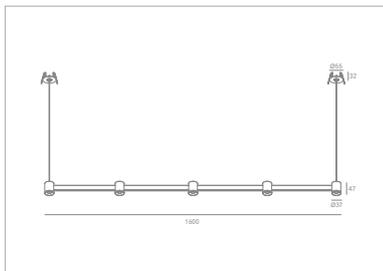

Especially designed for:

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.



Product Model No.	AP-DZ-0144A-20W	
Packaging Detail	178×8.5×9.5cm	
	STD PKG	1pcs
	N.W	1.14kgs
	G.W	3.14kgs


AP-DZ-0144A-20W

DC36V15W LEDDC3000K/ PRI: 1140m220-240/ incl.V~ 50/60-Hz

Driver SEC: Constant Current: DC500mA



Warm White 3000K ∠ 15°

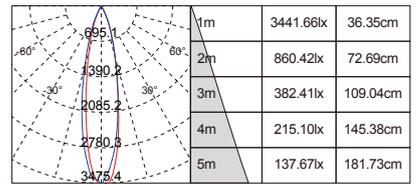

cd Height illuminance Diameter

Option colors



Various Brand of COB LED Light Source:



LED PENDANT  
LIGHT

TECHNICAL SPECIFICATIONS

Input (Optional)	220-240V~50/60 Hz
Maximum Wattage	16W±10% Max

Number of LEDs	5 LEDs COB
----------------	------------

Luminous Flux	1140LM (3000K)
---------------	----------------

Main Material	Aluminum & PC Lens Diffuser
---------------	-----------------------------

Color Temperature	3000K / 4000K / 6500K
-------------------	-----------------------

CRI	≥90
-----	-----


Power Factor	≥0.92
--------------	-------

Working Temperature	-10°C~45°C
---------------------	------------

Beam Angle (Optional)	15°
-----------------------	-----


Fixture Dimmable	Non-dimmable
------------------	--------------

Electrical	Internal Driver
Protection class	IP20

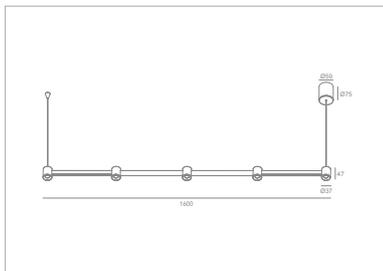

Especially designed for:

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.



Product Model No.	AP-DZ-0145A-16W	
Packaging Detail	178×8.5×9.5cm	
	STD PKG	1pcs
	N.W	1.24kgs
	G.W	3.24kgs


AP-DZ-0145A-16W

DC36V16W LEDDC3000K/ PRI: 1140lm220-240/ V~incl.50/60-Hz

Driver SEC: Constant Current: DC400mA



Warm White 3000K ∠ 15°

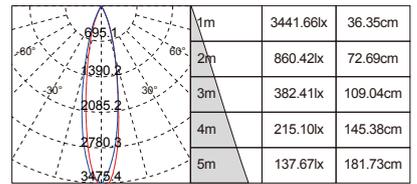

cd Height illuminance Diameter

Option colors



Various Brand of COB LED Light Source:





Product series

**AP-DZ-0150A-7W**



LED PENDANT  
LIGHT

TECHNICAL SPECIFICATIONS

Input (Optional)	220-240V~50/60 Hz
Maximum Wattage	7W±10% Max

Number of LEDs	1 LED COB
----------------	-----------

Luminous Flux	411LM (3000K)
---------------	---------------

Main Material	Aluminum & PC Lens Diffuser
---------------	-----------------------------

Color Temperature	3000K
-------------------	-------

CRI	≥90
-----	-----

Power Factor	≥0.8
--------------	------


Working Temperature	-10°C~45°C
---------------------	------------

Beam Angle (Optional)	24°
-----------------------	-----

Fixture Dimmable	Non-dimmable
------------------	--------------

Electrical	Internal Driver
------------	-----------------

Protection class	IP20
------------------	------

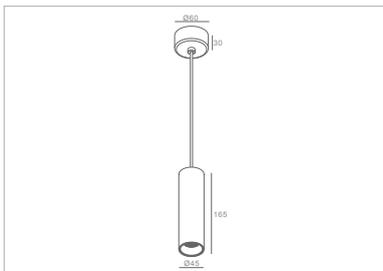

**Especially designed for:**

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.




Product Model No.	AP-DZ-0150A-7W	
Packaging Detail 	50.5×28×21.5cm	
	STD PKG	24pcs
	N.W	9.9kgs
	G.W	11.9kgs

**AP-DZ-0150A-7W**

DC30-42V7W LED 3000KDC / PRI:411lm220-240/ incl. -V~ 50/60 Hz 0.050A  
Driver SEC: Constant Current: DC170mA



Warm White 3000K ∠24°

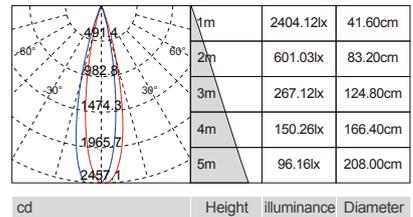

**Option colors**



**Various Brand of COB LED Light Source:**



LED PENDANT  
LIGHT

TECHNICAL SPECIFICATIONS

Input (Optional)	220-240V~50/60 Hz
Maximum Wattage	15W±10% Max

Number of LEDs	1 LED COB
----------------	-----------

Luminous Flux	859LM (3000K)
---------------	---------------

Main Material	Aluminum & PC Lens Diffuser
---------------	-----------------------------

Color Temperature	3000K
-------------------	-------

CRI	≥90
-----	-----

Power Factor	≥0.92
--------------	-------


Working Temperature	-10°C~45°C
---------------------	------------

Beam Angle (Optional)	24°
-----------------------	-----

Fixture Dimmable	Non-dimmable
------------------	--------------

Electrical	Internal Driver
------------	-----------------

Protection class	IP20
------------------	------

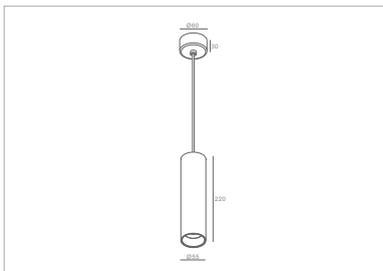

Especially designed for:

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.




Product Model No.	AP-DZ-0151A-15W	
Packaging Detail	35×33.5×28cm	
	STD PKG	20pcs
	N.W	10.6kgs
	G.W	12.6kgs

AP-DZ-0151A-15W

15W LED 3000K 859lm / incl. - Driver SEC: Constant Current: DC360mA/450mADC30-42V DC / PRI: 220-240 V~ 50/60 Hz 0.088A



Warm White 3000K ∠ 24°

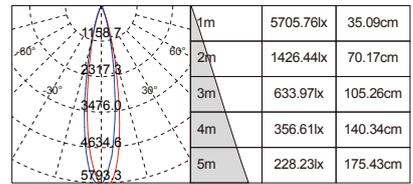

cd Height illuminance Diameter

Option colors



Various Brand of COB LED Light Source:



LED PENDANT  
LIGHT

TECHNICAL SPECIFICATIONS

Input (Optional)	220-240V~50/60 Hz
Maximum Wattage	7W±10% Max

Number of LEDs	1 LED COB
----------------	-----------

Luminous Flux	413LM (3000K)
---------------	---------------

Main Material	Aluminum & PC Lens Diffuser
---------------	-----------------------------

Color Temperature	3000K
-------------------	-------

CRI	≥90
-----	-----

Power Factor	≥0.8
--------------	------


Working Temperature	-10°C~45°C
---------------------	------------

Beam Angle (Optional)	24°
-----------------------	-----

Fixture Dimmable	Non-dimmable
------------------	--------------

Electrical	Internal Driver
------------	-----------------

Protection class	IP20
------------------	------

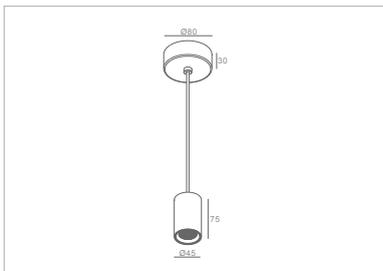

**Especially designed for:**

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.




Product Model No.	AP-DZ-0153A-7W	
Packaging Detail	45×41×41cm	
	STD PKG	18pcs
	N.W	4.95kgs
	G.W	6.95kgs

**AP-DZ-0153A-7W**

DC30-42V7W LED 3000KDC / PRI:413m220-240/ incl. -V~ 50/60 Hz 0.050A  
Driver SEC: Constant Current: DC170mA



Warm White 3000K ∠24°

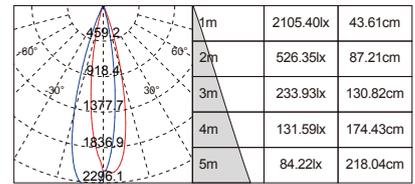

cd Height illuminance Diameter

**Option colors**



**Various Brand of COB LED Light Source:**





Product series

**AP-DZ-0160A-30W**



LED PENDANT  
LIGHT

TECHNICAL SPECIFICATIONS

Input (Optional)	220-240V~50/60 Hz
Maximum Wattage	30W±10% Max

Number of LEDs	35 LEDs SMD
----------------	-------------

Luminous Flux	938LM (3000K)
---------------	---------------

Main Material	Aluminum & Soundproof cotton
---------------	------------------------------

Color Temperature	3000K / 4000K / 6500K
-------------------	-----------------------

CRI	≥90
-----	-----

Power Factor	≥0.8
--------------	------


Working Temperature	-10°C~45°C
---------------------	------------

Beam Angle (Optional)	60°
-----------------------	-----

Fixture Dimmable	Non-dimmable
------------------	--------------

Electrical	Internal Driver
------------	-----------------

Protection class	IP20
------------------	------

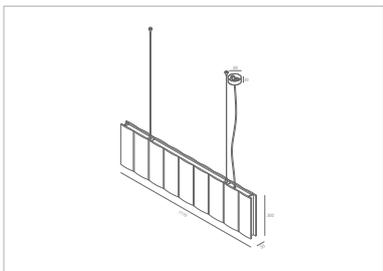

Especially designed for:

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.




Product Model No.	AP-DZ-0160A-30W	
Packaging Detail	124.5×37.5×10.5cm	
	STD PKG	1pcs
	N.W	3.3kgs
	G.W	4.5kgs

AP-DZ-0160A-30W

30WDC27-40VDCLED 3000K/ PRI:938lm220-240/ incl. V~ Driver50/60SEC:Hz 0.2AConstant Current: DC900mA



Warm White 3000K ∠60°

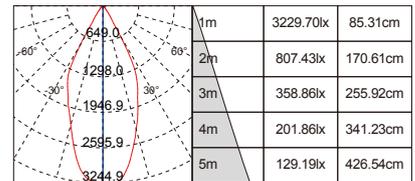

cd Height illuminance Diameter

Option colors



Various Brand of SMD LED Light Source:





Product series

**AP-DZ-0170A-6W**



LED PENDANT  
LIGHT

TECHNICAL SPECIFICATIONS

Input (Optional)	220-240V~50/60 Hz
Maximum Wattage	6W±10% Max

Number of LEDs	1 LEDs COB
----------------	------------

Luminous Flux	515LM (3000K)
---------------	---------------

Main Material	Aluminum & PMMA
---------------	-----------------

Color Temperature	3000K / 4000K / 6500K
-------------------	-----------------------

CRI	≥90
-----	-----

Power Factor	≥0.8
--------------	------


Working Temperature	-10°C~45°C
---------------------	------------

Beam Angle (Optional)	45°
-----------------------	-----

Fixture Dimmable	Non-dimmable
------------------	--------------

Electrical	Internal Driver
------------	-----------------

Protection class	IP20
------------------	------

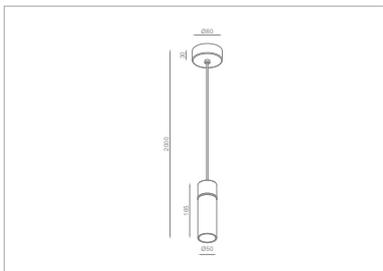


Product Model No.	AP-DZ-0170A-6W	
Packaging Detail	36×28×45.5cm	
	STD PKG	18pcs
	N.W	15.9kgs
	G.W	17.4kgs

AP-DZ-0170A-6W

DC18V6W LEDDC3000K/ PRI:515lm220-240/ incl.V~50/60 Hz  
Driver SEC: Constant Current: DC300mA



Warm White 3000K ∠45°

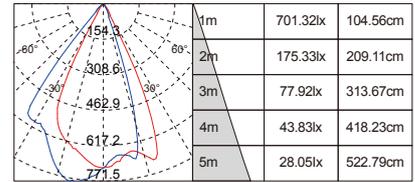

cd Height illuminance Diameter

Especially designed for:

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.



Various Brand of COB LED Light Source:





Product series

**AP-DZ-0171A-6W**



LED PENDANT  
LIGHT

TECHNICAL SPECIFICATIONS

Input (Optional)	220-240V~50/60 Hz
Maximum Wattage	6W±10% Max

Number of LEDs	1 LEDs COB
----------------	------------

Luminous Flux	375LM (3000K)
---------------	---------------

Main Material	Aluminum & PMMA
---------------	-----------------

Color Temperature	3000K / 4000K / 6500K
-------------------	-----------------------

CRI	≥90
-----	-----


Power Factor	≥0.8
--------------	------

Working Temperature	-10°C~45°C
---------------------	------------

Beam Angle (Optional)	15° / 45°
-----------------------	-----------

Fixture Dimmable	Non-dimmable
------------------	--------------

Electrical	Internal Driver
Protection class	IP20

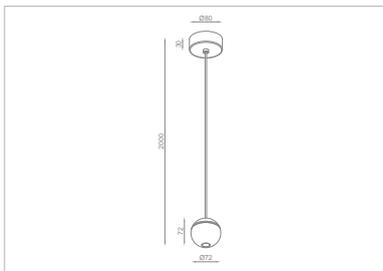

**Especially designed for:**

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.



Product Model No.	AP-DZ-0171A-6W	
Packaging Detail	36×28×26.5cm	
	STD PKG	18pcs
	N.W	16.32kgs
	G.W	18.32kgs

**AP-DZ-0171A-6W**

DC18V6W LEDDC3000K/ PRI:375lm220-240/ incl.V~50/60 Hz

Driver SEC: Constant Current: DC300mA



Warm White 3000K ∠15°

	1m	3073.58lx	34.19cm
	2m	768.40lx	68.37cm
	3m	341.51lx	102.56cm
	4m	192.10lx	136.75cm
	5m	122.94lx	170.93cm
cd	Height	illuminance	Diameter

**Option colors**



**Various Brand of COB LED Light Source:**





Product series

**AP-DZ-0172A-6W**



LED PENDANT  
LIGHT

TECHNICAL SPECIFICATIONS

Input (Optional)	220-240V~50/60 Hz
Maximum Wattage	6W±10% Max

Number of LEDs	1 LEDs COB
----------------	------------

Luminous Flux	375LM (3000K)
---------------	---------------

Main Material	Aluminum & PMMA
---------------	-----------------

Color Temperature	3000K / 4000K / 6500K
-------------------	-----------------------

CRI	≥90
-----	-----

Power Factor	≥0.8
--------------	------


Working Temperature	-10°C~45°C
---------------------	------------

Beam Angle (Optional)	15° / 45°
-----------------------	-----------

Fixture Dimmable	Non-dimmable
------------------	--------------

Electrical	Internal Driver
------------	-----------------

Protection class	IP20
------------------	------

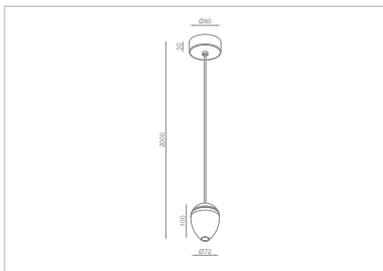

Especially designed for:

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.



Product Model No.	AP-DZ-0172A-6W	
Packaging Detail 	36×28×26.5cm	
	STD PKG	18pcs
	N.W	16.32kgs
	G.W	18.32kgs


AP-DZ-0172A-6W

DC18V6W LEDDC3000K/ PRI:375lm220-240/ incl.V~-50/60 Hz

Driver SEC: Constant Current: DC300mA



Warm White 3000K ∠15°

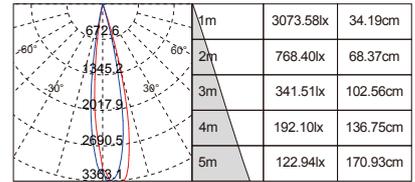


cd      Height      illuminance      Diameter

Option colors



Various Brand of COB LED Light Source:



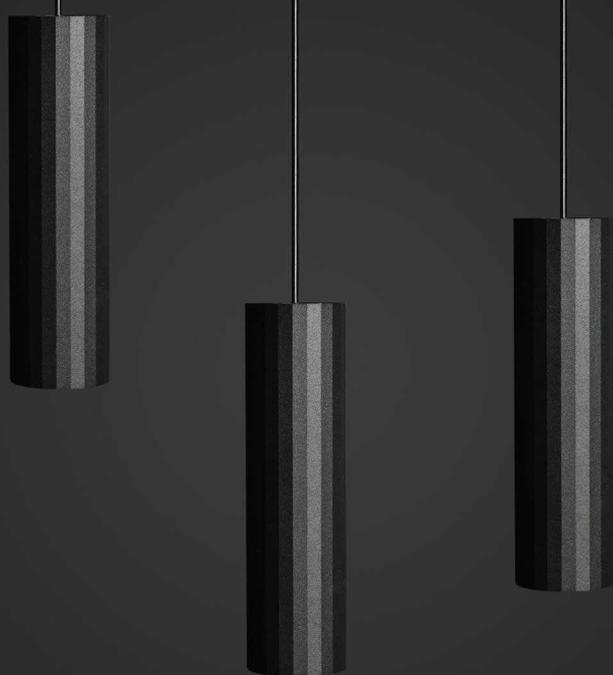

Product series

**AP-DZ-0180A-12W**



LED PENDANT  
LIGHT

TECHNICAL SPECIFICATIONS

Input (Optional)	220-240V~50/60 Hz
Maximum Wattage	12W±10% Max

Number of LEDs	1 LEDs COB
----------------	------------

Luminous Flux	822LM (3000K)
---------------	---------------

Main Material	Aluminum & PC Lens Diffuser
---------------	-----------------------------

Color Temperature	3000K / 4000K / 6500K
-------------------	-----------------------

CRI	≥90
-----	-----

Power Factor	≥0.8
--------------	------


Working Temperature	-10°C~45°C
---------------------	------------

Beam Angle (Optional)	24°
-----------------------	-----

Fixture Dimmable	Non-dimmable
------------------	--------------

Electrical	Internal Driver
------------	-----------------

Protection class	IP20
------------------	------

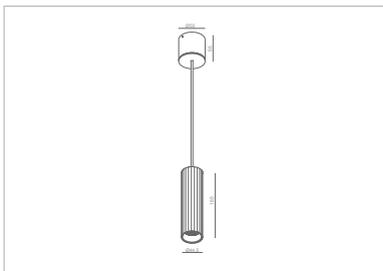

Especially designed for:

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.




Product Model No.	AP-DZ-0180A-12W	
Packaging Detail	51.5×43×34.5cm	
	STD PKG	24pcs
	N.W	7.32kgs
	G.W	9.32kgs

AP-DZ-0180A-12W

DC28-42VDC12W LED 3000K/ PRI:822lm220-240/ incl.V~50/60 Hz 0.18A  
Driver SEC: Constant Current: DC300mA




Warm White 3000K ∠24°

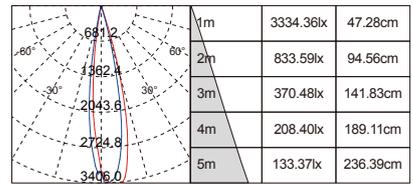

cd Height illuminance Diameter

Option colors



Various Brand of COB LED Light Source:





Product series

**AP-DZ-0210A-10W**



LED PENDANT  
LIGHT

TECHNICAL SPECIFICATIONS

Input (Optional)	220-240V~50/60 Hz
Maximum Wattage	10W±10% Max

Number of LEDs	24 LEDs SMD
----------------	-------------

Luminous Flux	750LM (3000K)
---------------	---------------

Main Material	Aluminum & Glass
---------------	------------------

Color Temperature	3000K / 4000K / 6500K
-------------------	-----------------------

CRI	≥90
-----	-----

Power Factor	≥0.8
--------------	------


Working Temperature	-10°C~45°C
---------------------	------------

Beam Angle (Optional)	110°
-----------------------	------

Fixture Dimmable	Non-dimmable
------------------	--------------

Electrical	Internal Driver
------------	-----------------

Protection class	IP20
------------------	------

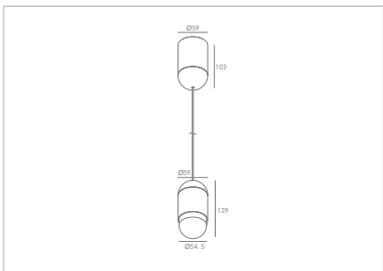

Especially designed for:

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.




Product Model No.	AP-DZ-0210A-10W	
Packaging Detail 	48.5×33×46.5cm	
	STD PKG	24pcs
	N.W	16.32kgs
	G.W	18.32kgs

AP-DZ-0210A-10W

DC36V10W LEDDC3000K/ PRI: 750lm220-240/ incl.V~ 50/60-Hz  
Driver SEC: Constant Current: DC250mA



Warm White 3000K ∠110°

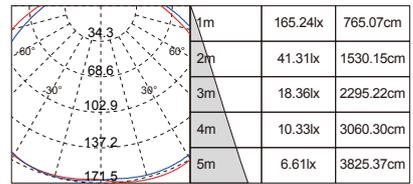

cd Height illuminance Diameter

Option colors



Various Brand of SMD LED Light Source:





Product series

**AP-DZ-0200A-10W**



LED PENDANT  
LIGHT

TECHNICAL SPECIFICATIONS

Input (Optional)	220-240V~50/60 Hz
Maximum Wattage	10W±10% Max

Number of LEDs	1 LEDs COB
----------------	------------

Luminous Flux	680LM (3000K)
---------------	---------------

Main Material	Aluminum & PC
---------------	---------------

Color Temperature	3000K / 4000K / 6500K
-------------------	-----------------------

CRI	≥90
-----	-----

Power Factor	≥0.55
--------------	-------


Working Temperature	-10°C~45°C
---------------------	------------

Beam Angle (Adjustable)	15°-60°
-------------------------	---------

Fixture Dimmable	Non-dimmable
------------------	--------------

Electrical	Internal Driver
------------	-----------------

Protection class	IP20
------------------	------

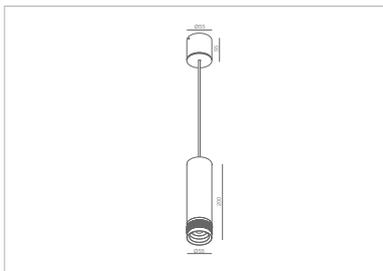

Especially designed for:

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.



Product Model No.	AP-DZ-0200A-10W
Packaging Detail	47×45.5×34.5cm
	STD PKG 24pcs
	N.W 15.36kgs
	G.W 17.36kgs

AP-DZ-0200A-10W


DC28-42VDC10W LED 3000K/

PRI:680lm220-240/ incl.V~50/60 Hz 0.15A

Driver SEC: Constant Current: DC250mA



Warm White 3000K ∠15°

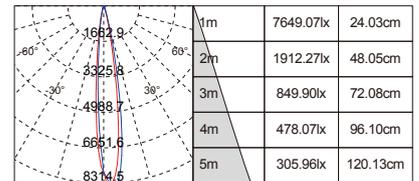

cd Height illuminance Diameter

Option colors



Various Brand of COB LED Light Source:





Product series


**AP-DZ-0211A-10W**



LED PENDANT  
LIGHT

TECHNICAL SPECIFICATIONS	
Input (Optional)	220-240V~50/60 Hz
Maximum Wattage	10W±10% Max
Number of LEDs	
24 LEDs SMD	
Luminous Flux	
722LM (3000K)	
Main Material	
Aluminum & Glass	
Color Temperature	
3000K / 4000K / 6500K	

CRI	≥90
Power Factor	≥0.8
Working Temperature	-10°C~45°C
Beam Angle (Optional)	110°
Fixture Dimmable	Non-dimmable
Electrical	Internal Driver
Protection class	IP20

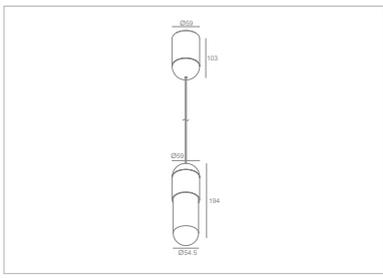

**Especially designed for:**  
Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.




Product Model No.	AP-DZ-0211A-10W	
Packaging Detail	47×47×34cm	
	STD PKG	18pcs
	N.W	14.04kgs
	G.W	16.04kgs

**AP-DZ-0211A-10W**

DC28-42VDC10W LED 3000K/ PRI:722lm220-240/ incl.V~50/60 Hz 0.12A  
Driver SEC: Constant Current: DC200mA



Warm White 3000K ∠110°

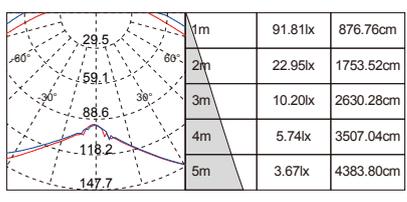

cd      Height      illuminance      Diameter

**Option colors**



Various Brand of SMD LED Light Source:





Product series

**AP-DZ-0212A-10W**



LED PENDANT  
LIGHT

TECHNICAL SPECIFICATIONS

Input (Optional)	220-240V~50/60 Hz
Maximum Wattage	10W±10% Max

Number of LEDs	24 LEDs SMD
----------------	-------------

Luminous Flux	722LM (3000K)
---------------	---------------

Main Material	Aluminum & Glass
---------------	------------------

Color Temperature	3000K / 4000K / 6500K
-------------------	-----------------------

CRI	≥90
-----	-----

Power Factor	≥0.8
--------------	------


Working Temperature	-10°C~45°C
---------------------	------------

Beam Angle (Optional)	110°
-----------------------	------

Fixture Dimmable	Non-dimmable
------------------	--------------

Electrical	Internal Driver
------------	-----------------

Protection class	IP20
------------------	------

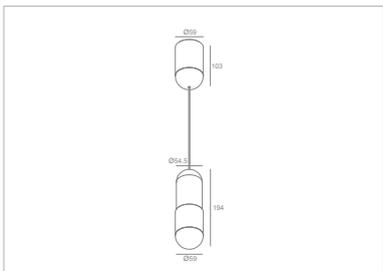

Especially designed for:

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.




Product Model No.	AP-DZ-0212A-10W	
Packaging Detail 	47×47×34cm	
	STD PKG	18pcs
	N.W	14.04kgs
	G.W	16.04kgs

AP-DZ-0212A-10W

DC28-42VDC10W LED 3000K/ PRI:722lm220-240/ incl.V~50/60 Hz 0.12A  
Driver SEC: Constant Current: DC200mA



Warm White 3000K ∠110°

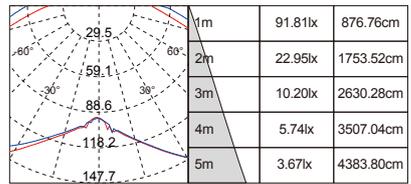

cd      Height   illuminance   Diameter

Option colors



Various Brand of SMD LED Light Source:





Product series

**AP-DZ-0213A-10W**



LED PENDANT  
LIGHT

TECHNICAL SPECIFICATIONS

Input (Optional)	220-240V~50/60 Hz
Maximum Wattage	10W±10% Max

Number of LEDs	24 LEDs SMD
----------------	-------------

Luminous Flux	662LM (3000K)
---------------	---------------

Main Material	Aluminum & Glass
---------------	------------------

Color Temperature	3000K / 4000K / 6500K
-------------------	-----------------------

CRI	≥90
-----	-----

Power Factor	≥0.8
--------------	------


Working Temperature	-10°C~45°C
---------------------	------------

Beam Angle (Optional)	110°
-----------------------	------

Fixture Dimmable	Non-dimmable
------------------	--------------

Electrical	Internal Driver
------------	-----------------

Protection class	IP20
------------------	------

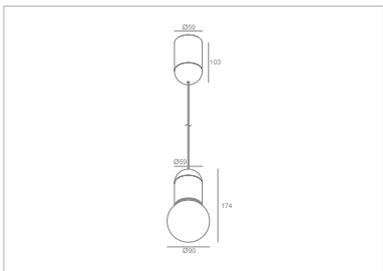

Especially designed for:

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.



Product Model No.	AP-DZ-0213A-10W	
Packaging Detail 	71×48×40cm	
	STD PKG	18pcs
	N.W	14.63kgs
	G.W	16.63kgs

AP-DZ-0213A-10W

DC28-42VDC10W LED 3000K/ PRI:662lm220-240/ incl.V~50/60 Hz 0.12A  
Driver SEC: Constant Current: DC200mA



Warm White 3000K ∠110°

	1m	171.87lx	642.13cm
	2m	42.97lx	1284.25cm
	3m	19.10lx	1926.38cm
	4m	10.74lx	2568.50cm
	5m	6.87lx	3210.63cm
	cd	Height	illuminance

Option colors



Various Brand of SMD LED Light Source:





Product series

**AP-DZ-0214A-10W**



LED PENDANT  
LIGHT

TECHNICAL SPECIFICATIONS

Input (Optional)	220-240V~50/60 Hz
Maximum Wattage	10W±10% Max

Number of LEDs	24 LEDs SMD
----------------	-------------

Luminous Flux	662LM (3000K)
---------------	---------------

Main Material	Aluminum & Glass
---------------	------------------

Color Temperature	3000K / 4000K / 6500K
-------------------	-----------------------

CRI	≥90
-----	-----

Power Factor	≥0.8
--------------	------


Working Temperature	-10°C~45°C
---------------------	------------

Beam Angle (Optional)	110°
-----------------------	------

Fixture Dimmable	Non-dimmable
------------------	--------------

Electrical	Internal Driver
------------	-----------------

Protection class	IP20
------------------	------

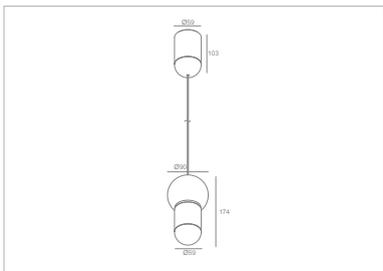

Especially designed for:

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.




Product Model No.	AP-DZ-0214A-10W	
Packaging Detail	71×48×40cm	
	STD PKG	18pcs
	N.W	14.63kgs
	G.W	16.63kgs

AP-DZ-0214A-10W

DC28-42VDC10W LED 3000K/ PRI:662lm220-240/ incl.V~50/60 Hz 0.12A  
Driver SEC: Constant Current: DC200mA



Warm White 3000K ∠110°

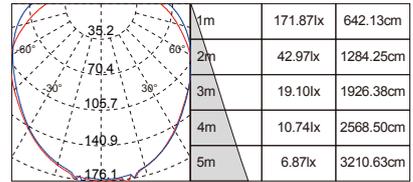

cd Height illuminance Diameter

Option colors



Various Brand of SMD LED Light Source:





Product series

**AP-DZ-0215A-10W**



LED PENDANT  
LIGHT

TECHNICAL SPECIFICATIONS

Input (Optional)	220-240V~50/60 Hz
Maximum Wattage	10W±10% Max

Number of LEDs	24 LEDs SMD
----------------	-------------

Luminous Flux	750LM (3000K)
---------------	---------------

Main Material	Aluminum & Glass
---------------	------------------

Color Temperature	3000K / 4000K / 6500K
-------------------	-----------------------

CRI	≥90
-----	-----


Power Factor	≥0.8
--------------	------

Working Temperature	-10°C~45°C
---------------------	------------

Beam Angle (Optional)	110°
-----------------------	------

Fixture Dimmable	Non-dimmable
------------------	--------------

Electrical	Internal Driver
Protection class	IP20

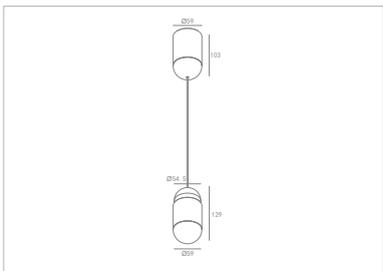

**Especially designed for:**

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.



Product Model No.	AP-DZ-0215A-10W	
Packaging Detail 	48.5×33×46.5cm	
	STD PKG	24pcs
	N.W	16.32kgs
	G.W	18.32kgs


**AP-DZ-0215A-10W**

DC36V10W LEDDC3000K/ PRI: 750lm220-240/ incl.V~ 50/60-Hz

Driver SEC: Constant Current: DC250mA



Warm White 3000K ∠110°

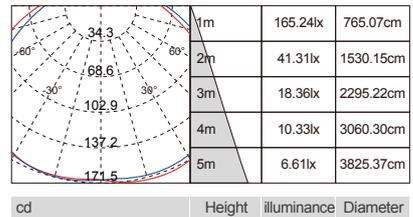

**Option colors**



**Various Brand of SMD LED Light Source:**





Product series

**AP-PDT701-80W**



LED PENDANT  
LIGHT

TECHNICAL SPECIFICATIONS

Input (Optional)	220-240V~50/60 Hz
Maximum Wattage	80W±10% Max


Number of LEDs	80 LEDs SMD
----------------	-------------

Luminous Flux	5500LM (3000K)
---------------	----------------

Main Material	Aluminum & PMMA
---------------	-----------------

Color Temperature	3000K / 4000K / 6500K
-------------------	-----------------------

CRI	≥80
Power Factor	≥0.92
Working Temperature	-10°C~45°C
Beam Angle (Optional)	130°
Fixture Dimmable	Non-dimmable
Electrical	Internal Driver
Protection class	IP20

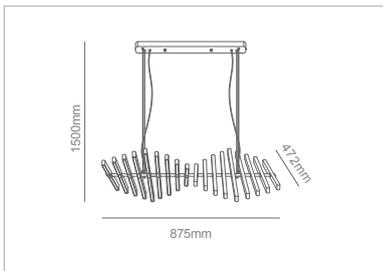

Especially designed for:

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.



Product Model No.	AP-PDT701-80W	
Packaging Detail	98.5×71×13cm	
	STD PKG	1pcs
	N.W	4.77kgs
	G.W	6.25kgs

Luxury and perfection  
Light and decoration

It has strong Postmodernism Characteristics, pays attention to smooth line design, returns to nature, advocates natural charm, plus modern and applicable exquisite art design style



Various Brand of COB LED Light Source:



LED PENDANT  
LIGHT

TECHNICAL SPECIFICATIONS

Input (Optional)	220-240V~50/60 Hz
Maximum Wattage	100W±10% Max

Number of LEDs	100 LEDs SMD
----------------	--------------

Luminous Flux	6250LM (3000K)
---------------	----------------

Main Material	Aluminum & PMMA
---------------	-----------------

Color Temperature	3000K / 4000K / 6500K
-------------------	-----------------------

CRI	≥80
-----	-----

Power Factor	≥0.92
--------------	-------



Working Temperature	-10°C~45°C
---------------------	------------

Beam Angle (Optional)	130°
-----------------------	------

Fixture Dimmable	Non-dimmable
------------------	--------------

Electrical	Internal Driver
------------	-----------------

Protection class	IP20
------------------	------

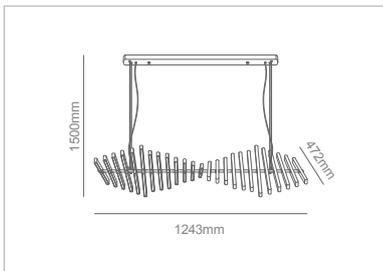

Product Model No.	AP-PDT701-100W	
Packaging Detail	135.5×73.5×13cm	
	STD PKG	1pcs
	N.W	6kgs
	G.W	8.5kgs



Giving your room more light is not only to protect the health but also to decorate your taste of life.

The understanding of the color and characteristic of life depends on yourself.

PERSONALITY • CONTRACTED • FASHION

Especially designed for:

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.



Various Brand of COB LED Light Source:



LED PENDANT  
LIGHT

TECHNICAL SPECIFICATIONS

<b>Input (Optional)</b>	220-240V~50/60 Hz
<b>Maximum Wattage</b>	150W±10% Max

<b>Number of LEDs</b>	150 LEDs SMD
-----------------------	--------------

<b>Luminous Flux</b>	9375LM (3000K)
----------------------	----------------

<b>Main Material</b>	Aluminum & PMMA
----------------------	-----------------

<b>Color Temperature</b>	3000K / 4000K / 6500K
--------------------------	-----------------------

<b>CRI</b>	≥80
------------	-----

<b>Power Factor</b>	≥0.92
---------------------	-------


<b>Working Temperature</b>	-10°C~45°C
----------------------------	------------

<b>Beam Angle (Optional)</b>	130°
------------------------------	------

<b>Fixture Dimmable</b>	Non-dimmable
-------------------------	--------------

<b>Electrical</b>	Internal Driver
-------------------	-----------------

<b>Protection class</b>	IP20
-------------------------	------

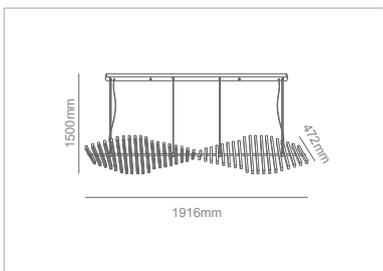

**Especially designed for:**

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.



<b>Product Model No.</b>	AP-PDT701-150W	
<b>Packaging Detail</b>	200.5×74.5×13cm	
	STD PKG	1pcs
	N.W	9.9kgs
	G.W	14.5kgs

## Curve Art

All inspiration comes from nature and Fantasy: the radian of waves and the lines of conch, the veins of mountains are the source of inspiration, the shape of each window, the position of each brick. It is worth pondering for a long time what kind of curve is suitable for use



**Various Brand of COB LED Light Source:**





Product series

**AP-PDT702-7W**



LED PENDANT  
LIGHT

TECHNICAL SPECIFICATIONS

Input (Optional)	220-240V~50/60 Hz
Maximum Wattage	7W±10% Max

Number of LEDs	1 LEDs COB
----------------	------------

Luminous Flux	418LM (3000K)
---------------	---------------

Main Material	Aluminum & PC Lens Diffuser
---------------	-----------------------------

Color Temperature	3000K
-------------------	-------

CRI	≥80
-----	-----

Power Factor	≥0.8
--------------	------


Working Temperature	-10°C~45°C
---------------------	------------

Beam Angle (Optional)	15°
-----------------------	-----

Fixture Dimmable	Non-dimmable
------------------	--------------

Electrical	Internal Driver
------------	-----------------

Protection class	IP20
------------------	------

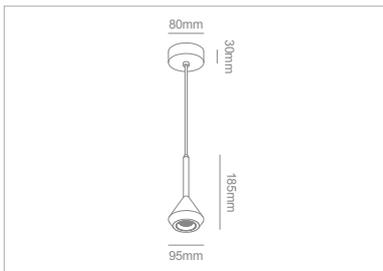


Product Model No.	AP-PDT702-7W	
Packaging Detail 	67×45×28cm	
	STD PKG	20pcs
	N.W	11.56kgs
	G.W	13.34kgs

AP-PDT702-7W

7W LED, 3000K, 418lm / 220-240V~50/60 Hz, 0.050A  
DC: F2VDC, PFI: 220-240V~50/60 Hz, 0.050A, Driver: SEC: Constant Current: DC600mA



Warm White 3000K ∠ 15°

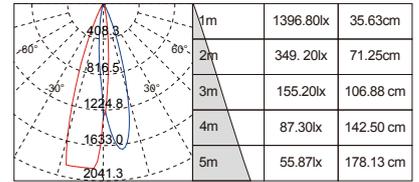

cd Height illuminance Diameter

Especially designed for:

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.



Various Brand of COB LED Light Source:





Product series

**AP-PDT703-7W**



LED PENDANT  
LIGHT

TECHNICAL SPECIFICATIONS

Input (Optional)	220-240V~50/60 Hz
Maximum Wattage	7W±10% Max

Number of LEDs	1 LEDs COB
----------------	------------

Luminous Flux	330LM (3000K)
---------------	---------------

Main Material	Aluminum & PC Lens Diffuser
---------------	-----------------------------

Color Temperature	3000K
-------------------	-------

CRI	≥80
-----	-----

Power Factor	≥0.8
--------------	------


Working Temperature	-10°C~45°C
---------------------	------------

Beam Angle (Optional)	20°
-----------------------	-----

Fixture Dimmable	Non-dimmable
------------------	--------------

Electrical	Internal Driver
------------	-----------------

Protection class	IP20
------------------	------

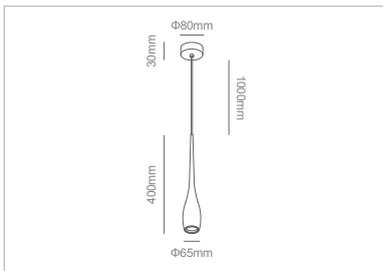


Product Model No.	AP-PDT703-7W	
Packaging Detail 	54×46.5×41cm	
	STD PKG	12pcs
	N.W	10.8kgs
	G.W	13.4kgs

AP-PDT703-7W

DC8-12VDC7W LED 3000K/ PRI:330lm220-240/ incl.V~50/60 Hz 0.050A  
Driver SEC: Constant Current: DC600mA



Warm White 3000K ∠ 20°

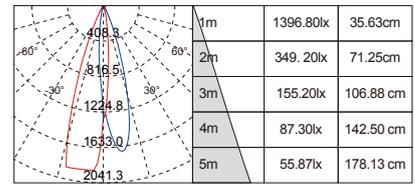

cd Height illuminance Diameter

Especially designed for:

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.



Various Brand of COB LED Light Source:





Product series

**AP-PDT706-7W**



LED PENDANT  
LIGHT

TECHNICAL SPECIFICATIONS

Input (Optional)	220-240V~50/60 Hz
Maximum Wattage	7W±10% Max

Number of LEDs	1 LEDs COB
----------------	------------

Luminous Flux	277LM (3000K)
---------------	---------------

Main Material	Aluminum & PC Lens Diffuser
---------------	-----------------------------

Color Temperature	3000K
-------------------	-------

CRI	≥80
-----	-----

Power Factor	≥0.8
--------------	------


Working Temperature	-10°C~45°C
---------------------	------------

Beam Angle (Optional)	130°
-----------------------	------

Fixture Dimmable	Non-dimmable
------------------	--------------

Electrical	Internal Driver
------------	-----------------

Protection class	IP20
------------------	------

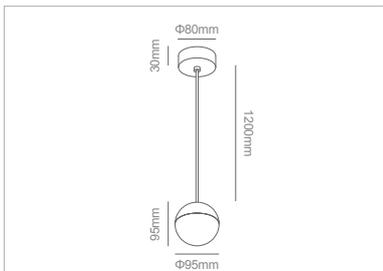


Product Model No.	AP-PDT706-7W	
Packaging Detail 	69.5×40×62cm	
	STD PKG	20pcs
	N.W	11.56kgs
	G.W	13.34kgs

AP-PDT706-7W

DC8-12VDC7W LED 3000K/ PRI:277lm220-240/ incl.V~50/60 Hz 0.050A  
Driver SEC: Constant Current: DC600mA



Warm White 3000K ∠130°

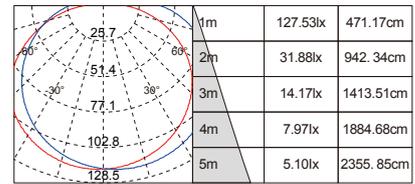

cd Height illuminance Diameter

Especially designed for:

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.



Various Brand of COB LED Light Source:





Product series


**AP-PDT707-7W**



LED PENDANT  
LIGHT

TECHNICAL SPECIFICATIONS

<b>Input (Optional)</b>	220-240V~50/60 Hz
<b>Maximum Wattage</b>	7W±10% Max
<b>Number of LEDs</b>	1 LEDs COB
<b>Luminous Flux</b>	330LM (3000K)
<b>Main Material</b>	Die-casting Aluminum & PC Lens Diffuser
<b>Color Temperature</b>	3000K / 4000K / 6500K
<b>CRI</b>	≥80
<b>Power Factor</b>	≥0.8
<b>Working Temperature</b>	-10°C~45°C
<b>Beam Angle (Optional)</b>	20°
<b>Fixture Dimmable</b>	Non-dimmable
<b>Electrical</b>	Internal Driver
<b>Protection class</b>	IP20

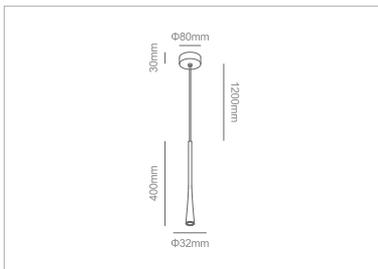


<b>Product Model No.</b>	AP-PDT707-7W	
<b>Packaging Detail</b>	50×50×50.5cm	
	STD PKG	16pcs
	N.W	10kgs
	G.W	11.5kgs

**AP-PDT707-7W**

7W LED 3000K 330lm / incl. - Driver SEC: Constant Current: DC600mA  
DC8-12VDC / PRI: 220-240 V~ 50/60 Hz 0.050A



Warm White 3000K ∠20°

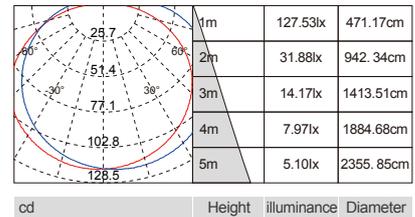

**Especially designed for:**

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.




Various Brand of COB LED Light Source:



LED PENDANT  
LIGHT

TECHNICAL SPECIFICATIONS

<b>Input (Optional)</b>	220-240V~50/60 Hz
<b>Maximum Wattage</b>	7W±10% Max
<b>Number of LEDs</b>	
1 LEDs COB	
<b>Luminous Flux</b>	
330LM (3000K)	
<b>Main Material</b>	
Die-casting Aluminum & PC Lens Diffuser	
<b>Color Temperature</b>	
3000K / 4000K / 6500K	
<b>CRI</b>	≥80
<b>Power Factor</b>	≥0.8
<b>Working Temperature</b>	-10°C~45°C
<b>Beam Angle (Optional)</b>	20°
<b>Fixture Dimmable</b>	Non-dimmable
<b>Electrical</b>	Internal Driver
<b>Protection class</b>	IP20

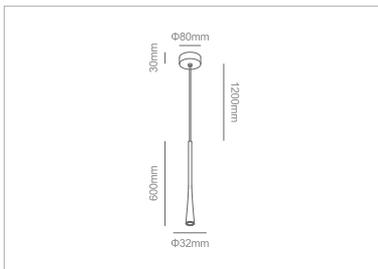


<b>Product Model No.</b>	AP-PDT707-7W	
<b>Packaging Detail</b>	70.5×38×50cm	
	STD PKG	12pcs
	N.W	5.8kgs
	G.W	8.7kgs

**AP-PDT707-7W**

7W LED 3000K 330lm / incl. - Driver SEC: Constant Current: DC600mA  
DC8-12VDC / PRI: 220-240 V~ 50/60 Hz 0.050A



Warm White 3000K ∠20°

	1m	127.53lx	471.17cm
	2m	31.88lx	942.34cm
	3m	14.17lx	1413.51cm
	4m	7.97lx	1884.68cm
	5m	5.10lx	2355.85cm
<b>cd</b>	<b>Height</b>	<b>illuminance</b>	<b>Diameter</b>

**Especially designed for:**

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.




Various Brand of COB LED Light Source:



LED PENDANT  
LIGHT

TECHNICAL SPECIFICATIONS	
Input (Optional)	220-240V~50/60 Hz
Maximum Wattage	7W±10% Max
Number of LEDs	
1 LEDs COB	
Luminous Flux	
330LM (3000K)	
Main Material	
Die-casting Aluminum & PC Lens Diffuser	
Color Temperature	
3000K / 4000K / 6500K	
CRI	≥80
Power Factor	≥0.8
Working Temperature	-10°C~45°C
Beam Angle (Optional)	20°
Fixture Dimmable	Non-dimmable
Electrical	Internal Driver
Protection class	IP20

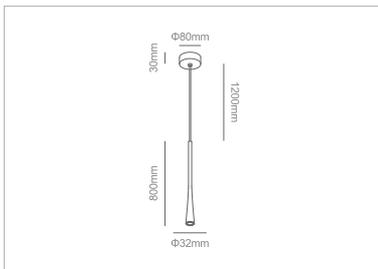


Product Model No.	AP-PDT707-7W	
Packaging Detail	90.5×38×50cm	
	STD PKG	12pcs
	N.W	6.7kgs
	G.W	10.7kgs

### AP-PDT707-7W

7W LED 3000K 330lm / incl. - Driver SEC: Constant Current: DC600mA  
DC8-12VDC / PRI: 220-240 V~ 50/60 Hz 0.050A



Warm White 3000K ∠20°

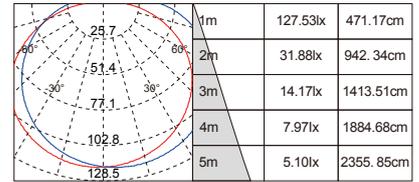

cd      Height      illuminance      Diameter

**Especially designed for:**

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.




Various Brand of COB LED Light Source:



Product series

# AP-PDT707-9×3W

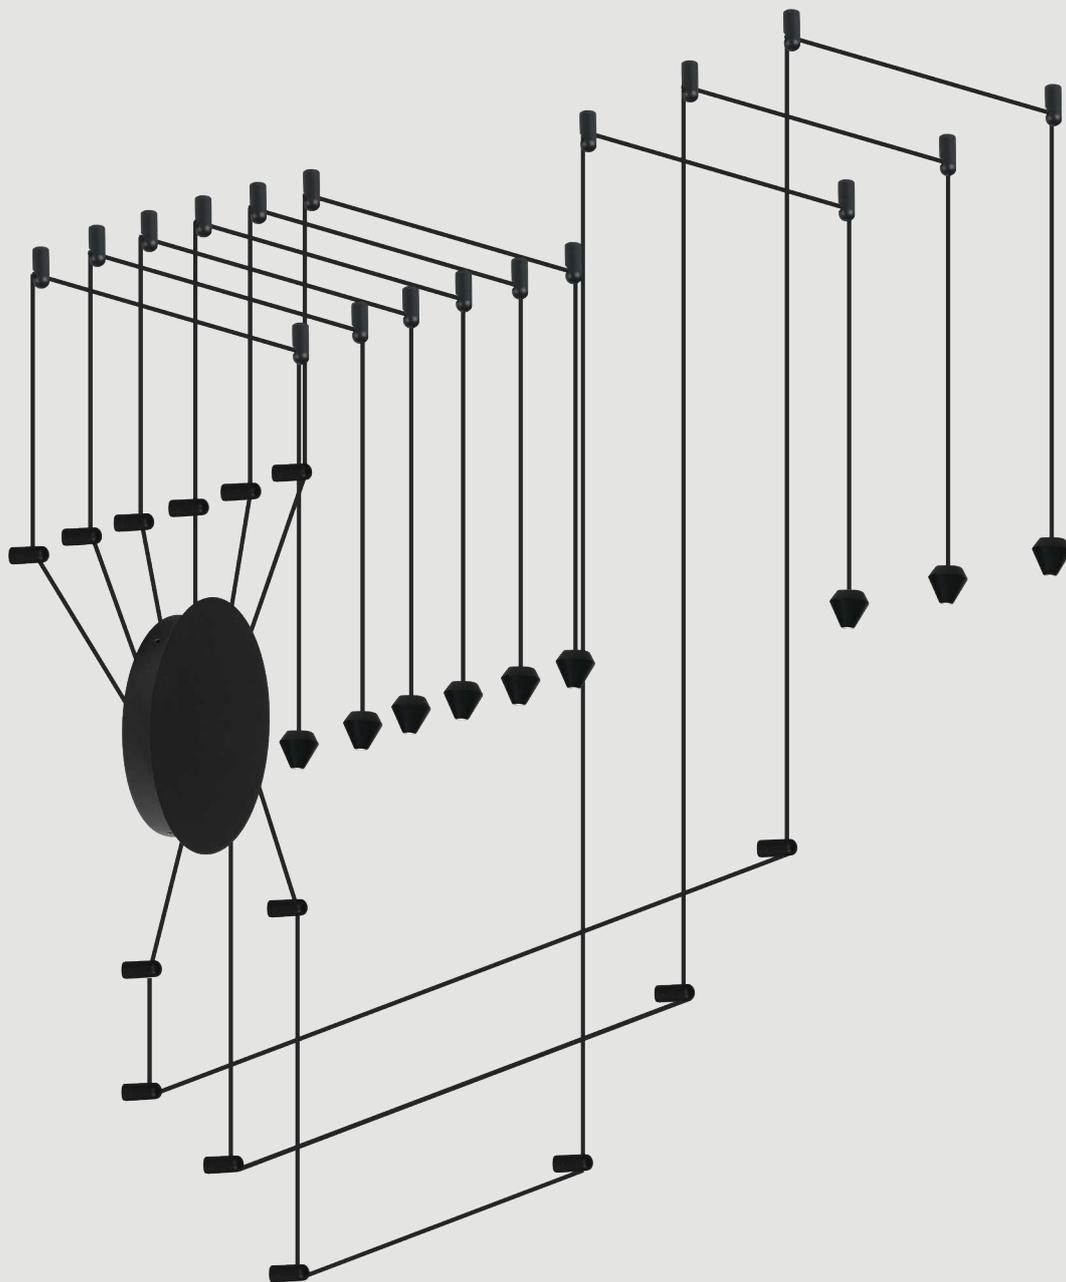

LED PENDANT  
LIGHT

TECHNICAL SPECIFICATIONS

Input (Optional)	220-240V~50/60 Hz
Maximum Wattage	3W±10% Max

Number of LEDs	1 LED COB
----------------	-----------

Luminous Flux	210LM (3000K)
---------------	---------------

Main Material	Die-casting Aluminum & PC Lens Diffuser
---------------	---

Color Temperature	3000K
-------------------	-------

CRI	≥80
-----	-----


Power Factor	≥0.8
--------------	------

Working Temperature	-10°C~45°C
---------------------	------------

Beam Angle (Optional)	15°
-----------------------	-----


Fixture Dimmable	Non-dimmable
------------------	--------------

Electrical	Electronic Internal Driver
Protection class	IP20

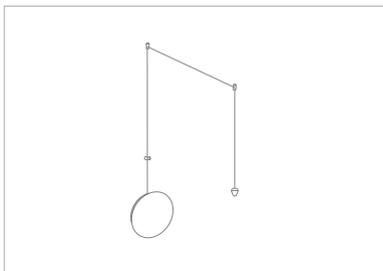

**Especially designed for:**

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.



Product Model No.	AP-PDT707-1×3W	
Packaging Detail	31x24x14.5cm	
	STD PKG	1pcs
	N.W	1.1kgs
	G.W	2kgs


**AP-PDT707-1×3W**

DC170mA3W LED 3000KDC30-42VDC210lm / incl. / PRI:-220-240 V~ 50/60 Hz 0.050A

ELECTRONIC Driver SEC: Constant Current:



Warm White 3000K ∠ 15°

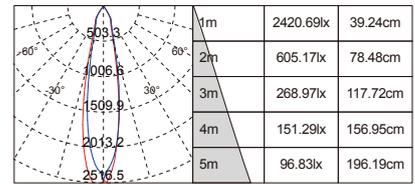

cd      Height      illuminance      Diameter

Various Brand of COB LED Light Source:



LED PENDANT  
LIGHT

TECHNICAL SPECIFICATIONS

Input (Optional)	220-240V~50/60 Hz
Maximum Wattage	9W±10% Max

Number of LEDs	3 LEDs COB
----------------	------------

Luminous Flux	630LM (3000K)
---------------	---------------

Main Material	Die-casting Aluminum & PC Lens Diffuser
---------------	---

Color Temperature	3000K
-------------------	-------

CRI	≥80
-----	-----


Power Factor	≥0.8
--------------	------

Working Temperature	-10°C~45°C
---------------------	------------

Beam Angle (Optional)	15°
-----------------------	-----

Fixture Dimmable	Non-dimmable
------------------	--------------

Electrical	Electronic Internal Driver
Protection class	IP20

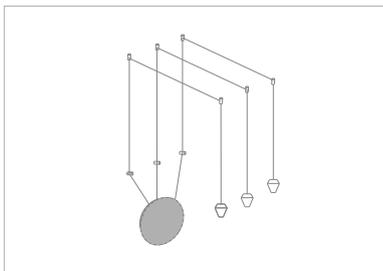

Especially designed for:

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.



Product Model No.	AP-PDT707-3×3W	
Packaging Detail	45.5x34x14.5cm	
	STD PKG	1pcs
	N.W	2.65kgs
	G.W	3.15kgs

AP-PDT707-3×3W

DC170mA9W LED 3000KDC30-42VDC630lm / incl./ PRI:-220-240 V~ 50/60 Hz 0.050A  
ELECTRONIC Driver SEC: Constant Current:



Warm White 3000K ∠ 15°

	1m	2420.69lx	39.24cm
	2m	605.17lx	78.48cm
	3m	268.97lx	117.72cm
	4m	151.29lx	156.95cm
	5m	96.83lx	196.19cm
	cd	Height	illuminance

Various Brand of COB LED Light Source:



LED PENDANT  
LIGHT

TECHNICAL SPECIFICATIONS

Input (Optional)	220-240V~50/60 Hz
Maximum Wattage	18W±10% Max

Number of LEDs	6 LEDs COB
----------------	------------

Luminous Flux	1260LM (3000K)
---------------	----------------

Main Material	Die-casting Aluminum & PC Lens Diffuser
---------------	---

Color Temperature	3000K
-------------------	-------

CRI	≥80
-----	-----



Power Factor	≥0.92
--------------	-------

Working Temperature	-10°C~45°C
---------------------	------------

Beam Angle (Optional)	15°
-----------------------	-----

Fixture Dimmable	Non-dimmable
------------------	--------------

Electrical	Electronic Internal Driver
Protection class	IP20

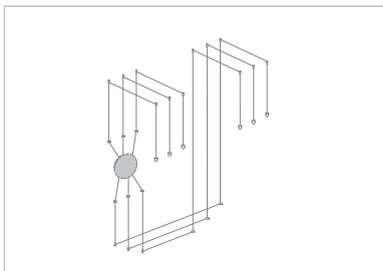

Product Model No.	AP-PDT707-6×3W	
Packaging Detail	61x34x14.5cm	
	STD PKG	1pcs
	N.W	4.2kgs
	G.W	4.8kgs

AP-PDT707-6×3W

18WDC170mALED 3000KDC30-42VDC1260lm // PRI:incl. -220-240ELECTRONICV~ 50/60DriverHz 0.050ASEC: Constant Current:



Warm White 3000K ∠ 15°

	1m	2420.69lx	39.24cm
	2m	605.17lx	78.48cm
	3m	268.97lx	117.72cm
	4m	151.29lx	156.95cm
	5m	96.83lx	196.19cm
	cd	Height	illuminance

Especially designed for:

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.



Various Brand of COB LED Light Source:



LED PENDANT  
LIGHT

TECHNICAL SPECIFICATIONS

Input (Optional)	220-240V~50/60 Hz
Maximum Wattage	27W±10% Max

Number of LEDs	9 LEDs COB
----------------	------------

Luminous Flux	1890LM (3000K)
---------------	----------------

Main Material	Die-casting Aluminum & PC Lens Diffuser
---------------	---

Color Temperature	3000K
-------------------	-------

CRI	≥80
-----	-----



Power Factor	≥0.92
--------------	-------

Working Temperature	-10°C~45°C
---------------------	------------

Beam Angle (Optional)	15°
-----------------------	-----

Fixture Dimmable	Non-dimmable
------------------	--------------

Electrical	Electronic Internal Driver
Protection class	IP20

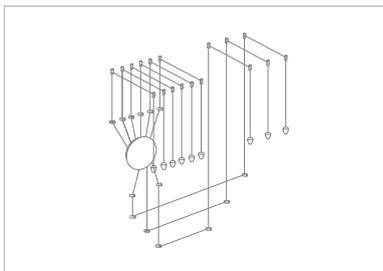


Product Model No.	AP-PDT707-9×3W	
Packaging Detail	72x45x14.5cm	
	STD PKG	1pcs
	N.W	7.1kgs
	G.W	8kgs

AP-PDT707-9×3W

27WDC170mALED 3000KDC30-42VDC1890lm // PRI:incl. -220-240ELECTRONICV~ 50/60DriverHz 0.050ASEC: Constant Current:



Warm White 3000K ∠ 15°

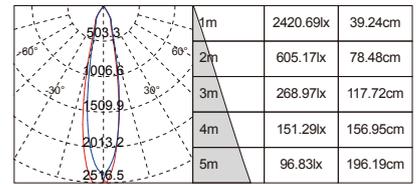

cd Height illuminance Diameter

Especially designed for:

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.



Various Brand of COB LED Light Source:





Product series

**AP-PJ-0030**



LED PENDANT  
LIGHT

TECHNICAL SPECIFICATIONS

Input (Optional)	220-240V~50/60 Hz
Maximum Wattage	10W±10% Max

Number of LEDs	24 LEDs PATCH
----------------	---------------

Luminous Flux	515LM (3000K)
---------------	---------------

Main Material	Die-casting Aluminum
---------------	----------------------

Color Temperature	3000K / 4000K / 6500K
-------------------	-----------------------

CRI	≥90
-----	-----

Power Factor	≥0.8
--------------	------

Working Temperature	-10°C~45°C
---------------------	------------

Beam Angle (Optional)	110°
-----------------------	------

Fixture Dimmable	Non-dimmable
------------------	--------------

Electrical	Internal Driver
------------	-----------------




Product Model No.	AP-PJ-0030	
Packaging Detail	36×28×45.5cm	
	STD PKG	18pcs
	N.W	15.9kgs
	G.W	17.4kgs

**AP-PJ-0030**

10W LED 3000K 722lm / incl. - Driver SEC: Constant Current: DC200mA  
DC28-42VDC / PRI: 220-240 V~ 50/60 Hz 0.12A



Warm White 3000K ∠110°

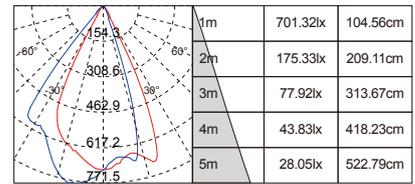

cd Height illuminance Diameter

**Especially designed for:**

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.



Various Brand of COB LED Light Source:









*-Page wall lamp-*

Minimalist Nordic Europe  
Skilled craftsmen in space lighting

# A variety of styles, changing with your heart

Open from the wall like a book or document, simple but tasteful, elegant but interesting

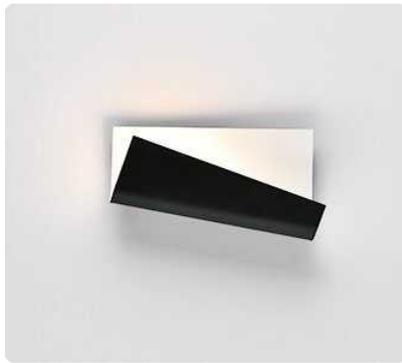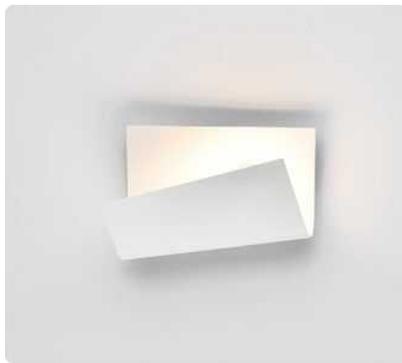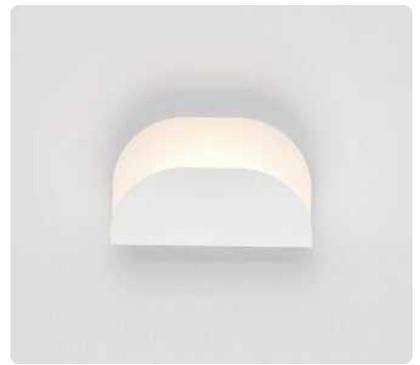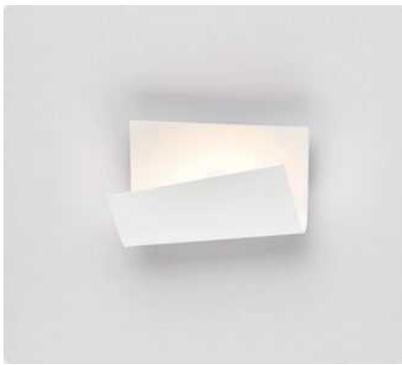


# FOCUS ON MINIMALIST DESIGN

Not confined to traditional and modern style, let the least and most delicate elements get the richest presentation.

## Light,

Abandon the complicated decoration, only leave the elegant side

Not only high appearance, but also high quality



# FULL OF LIVING ROOM

—  
Let elegance fill the room

A good-looking bedside wall lamp is an extremely important "design language" for the wall. It can not only improve the soft decoration effect of the whole room, but also create a romantic and warm light effect, and mobilize the atmosphere of the whole space.



# Minimalism in northern Europe



It happened that I met you, and everything I love in my life is like it.



*The moment darkness  
falls.....*



*Waiting for to the peace mind brought  
by the light.....*

Simple design, low-key interpretation of fashion taste, with different lights,  
add a bit of nature and flexibility to the home



○○○

# HALO OF LIGHT

---

SIMPLE BUT EXTRAORDINARY, ELEGANT BUT NOT VULGAR, LET THE DULL WALL ACTIVE

/ Art lighting /

# WALL LAMP



Design inspiration and fashion elements coexist  
For you to create a different living space

Whatever you want, all kinds of fashion

Suitable for bedroom, small living room, study, aisle.....





//  
—

# Refined life


The pursuit of exquisite life is the natural embodiment of wisdom. paying attention to low-carbon environmental protection is not only a profound feeling, but also a state of quiet water.

# PRODUCT SIZE

---

You can choose from a variety of sizes

Aim to create a comfortable lighting life for you in northern Europe



# HEALTHY AND COMFOFTABLE

## Outdated high face value

Aim to create a comfortable lighting life for you in northern Europe



|

With a comfortable natural beauty  
Pursuit is committed to simplicity without losing fashion

Nordic aesthetics modern

|



M

*Every trivial detail design has a beautiful pursuit of  
comfort and nature, and is committed to simplicity rather  
than simplicity. The design from complexity to simplicity  
has been brought into full play and become a classic*




The simple lines give the space a simple light, the beauty that can't be sculpted is natural and pure, and only do yourself to meet the beautiful vision of home




Creative design +  
-  
**NORDIC EUROPE**

The simple lines give the space a simple light, the beauty that can't be sculpted is natural and pure, and only do yourself to meet the beautiful vision of home

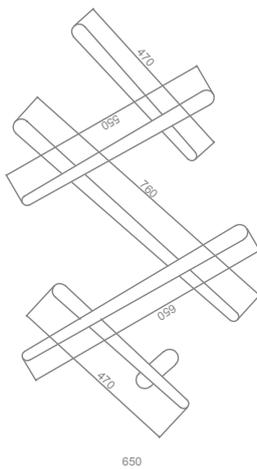

1050

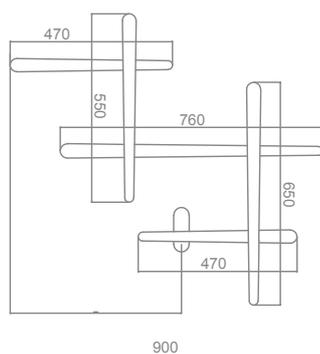

850



Product code: AP-BD-0042A  
Power: 25W  
CRI:  $\geq 90$   
Beam angle: 110°  
Protection class: IP20  
Main Material: Aluminum



---

## BUD LIGHT

A good-looking bedside wall lamp is an extremely important "design language" for the wall. It can not only improve the soft decoration effect of the whole room, but also create a romantic and warm light effect, and mobilize the atmosphere of the whole space.

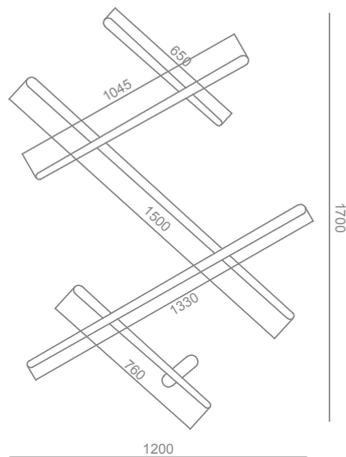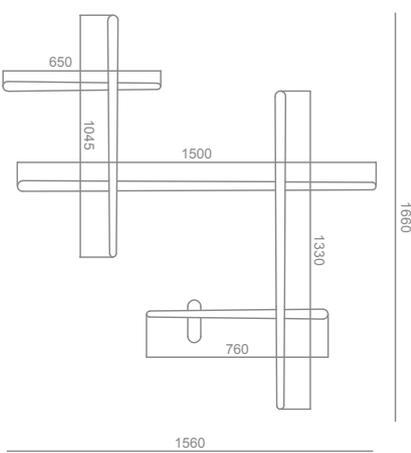

Product code: AP-BD-0041A  
 Power: 38W  
 CRI:  $\geq 90$   
 Beam angle: 110°  
 Protection class: IP20  
 Main Material: Aluminum

Product series

# AP-BD-0001A-7.5W



LED WALL  
LAMP

TECHNICAL SPECIFICATIONS

Input (Optional)	220-240V~50/60 Hz
Maximum Wattage	7.5W±10% Max

Number of LEDs	48 LEDs SMD
----------------	-------------

Luminous Flux	504LM (3000K)
---------------	---------------

Main Material	Aluminum + Iron
---------------	-----------------

Color Temperature	3000K / 4000K / 6500K
-------------------	-----------------------

CRI	≥90
-----	-----


Power Factor	≥0.8
--------------	------

Working Temperature	-10°C~45°C
---------------------	------------

Beam Angle (Optional)	110°
-----------------------	------

Fixture Dimmable	Non-dimmable
------------------	--------------

Electrical	Internal Driver
Protection class	IP20

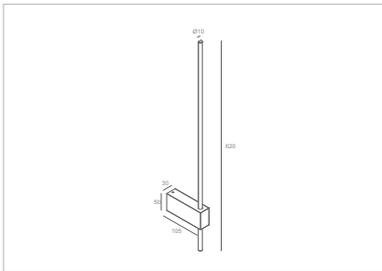

Product Model No.	AP-BD-0001A-7.5W	
Packaging Detail	68×58×35cm	
	STD PKG	20pcs
	N.W	5.96kgs
	G.W	7.96kgs


AP-BD-0001A-7.5W

DC30-42V7.5W LED 3000KDC / P

Driver SEC: Constant Current: DC170mA



Warm White 3000K ∠110°

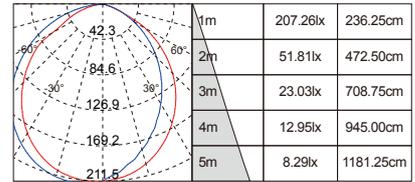

cd      Height      illuminance      Diameter

Especially designed for:

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.



Various Brand of SMD LED Light Source:



Product series


# AP-BD-0002A-15W



LED WALL  
LAMP

TECHNICAL SPECIFICATIONS


<b>Input (Optional)</b>	220-240V~50/60 Hz
<b>Maximum Wattage</b>	15W±10% Max
<b>Number of LEDs</b>	96 LEDs SMD
<b>Luminous Flux</b>	776LM (3000K)
<b>Main Material</b>	Aluminum + Iron
<b>Color Temperature</b>	3000K / 4000K / 6500K
<b>CRI</b>	≥90
<b>Power Factor</b>	≥0.8
<b>Working Temperature</b>	-10°C~45°C
<b>Beam Angle (Optional)</b>	110°
<b>Fixture Dimmable</b>	Non-dimmable
<b>Electrical</b>	Internal Driver
<b>Protection class</b>	IP20

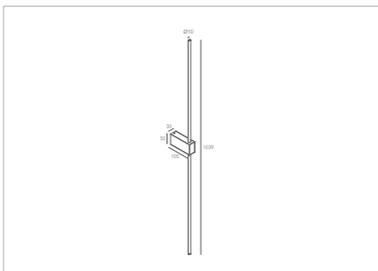


<b>Product Model No.</b>	AP-BD-0002A-15W	
<b>Packaging Detail</b>	130×28.5×44cm	
	STD PKG	12pcs
	N.W	4.22kgs
	G.W	6.22kgs

AP-BD-0002A-15W

DC30-42V15W LED 3000KDC / PR  
Driver SEC: Constant Current: DC170mA



Warm White 3000K ∠110°

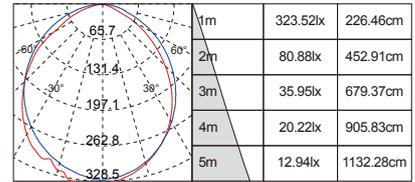

cd      Height      illuminance      Diameter

Especially designed for:

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.



Various Brand of SMD LED Light Source:



Product series

# AP-BD-0003A-15W



LED WALL  
LAMP

TECHNICAL SPECIFICATIONS

Input (Optional)	220-240V~50/60 Hz
Maximum Wattage	15W±10% Max

Number of LEDs	96 LEDs SMD
----------------	-------------

Luminous Flux	776LM (3000K)
---------------	---------------

Main Material	Aluminum + Iron
---------------	-----------------

Color Temperature	3000K / 4000K / 6500K
-------------------	-----------------------

CRI	≥90
-----	-----

Power Factor	≥0.8
--------------	------


Working Temperature	-10°C~45°C
---------------------	------------

Beam Angle (Optional)	110°
-----------------------	------

Fixture Dimmable	Non-dimmable
------------------	--------------

Electrical	Internal Driver
------------	-----------------

Protection class	IP20
------------------	------

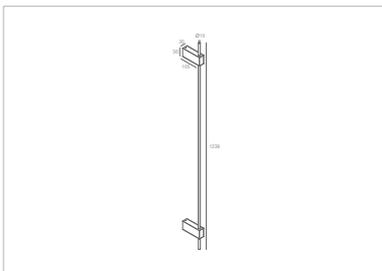

Product Model No.	AP-BD-0003A-15W	
Packaging Detail	130×28.5×44cm	
	STD PKG	12pcs
	N.W	7.14kgs
	G.W	9.14kgs


AP-BD-0003A-15W

DC30-42V15W LED 3000KDC / PRI:776lm220-240/ incl. V~50/60 Hz 0.050A

Driver SEC: Constant Current: DC170mA




Warm White 3000K ∠110°

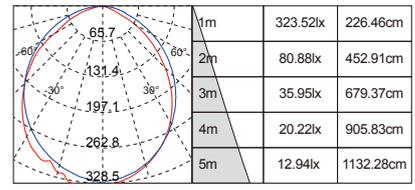

cd Height illuminance Diameter

Especially designed for:

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.

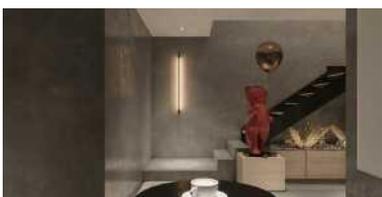

Various Brand of SMD LED Light Source:



Product series

# AP-BD-0004A-15W



LED WALL  
LAMP

TECHNICAL SPECIFICATIONS

Input (Optional)	220-240V~50/60 Hz
Maximum Wattage	15W±10% Max

Number of LEDs	96 LEDs SMD
----------------	-------------

Luminous Flux	867LM (3000K)
---------------	---------------

Main Material	Aluminum + Iron
---------------	-----------------

Color Temperature	3000K / 4000K / 6500K
-------------------	-----------------------

CRI	≥90
-----	-----

Power Factor	≥0.8
--------------	------


Working Temperature	-10°C~45°C
---------------------	------------

Beam Angle (Optional)	110°
-----------------------	------

Fixture Dimmable	Non-dimmable
------------------	--------------

Electrical	Internal Driver
------------	-----------------

Protection class	IP20
------------------	------

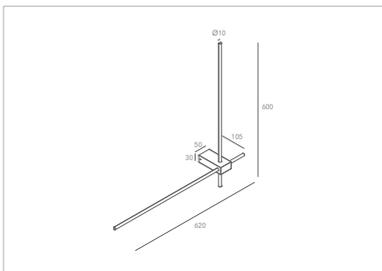


Product Model No.	AP-BD-0004A-15W	
Packaging Detail	58×58×14.5cm	
	STD PKG	1pcs
	N.W	0.36kgs
	G.W	1.36kgs

AP-BD-0004A-15W

DC30-42V15W LED 3000KDC / PR  
Driver SEC: Constant Current: DC170mA



Warm White 3000K ∠110°

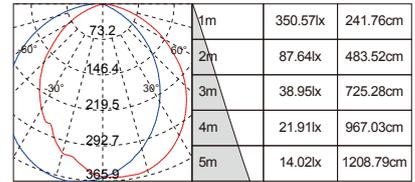

cd Height illuminance Diameter

Especially designed for:

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.



Various Brand of SMD LED Light Source:



Product series

# AP-BD-0005A-15W



LED WALL  
LAMP

**TECHNICAL SPECIFICATIONS**

<b>Input (Optional)</b>	220-240V~50/60 Hz
<b>Maximum Wattage</b>	15W±10% Max

<b>Number of LEDs</b>	96 LEDs SMD
-----------------------	-------------

<b>Luminous Flux</b>	867LM (3000K)
----------------------	---------------

<b>Main Material</b>	Aluminum + Iron
----------------------	-----------------

<b>Color Temperature</b>	3000K / 4000K / 6500K
--------------------------	-----------------------

<b>CRI</b>	≥90
------------	-----

<b>Power Factor</b>	≥0.8
---------------------	------


<b>Working Temperature</b>	-10°C~45°C
----------------------------	------------

<b>Beam Angle (Optional)</b>	110°
------------------------------	------

<b>Fixture Dimmable</b>	Non-dimmable
-------------------------	--------------

<b>Electrical</b>	Internal Driver
-------------------	-----------------

<b>Protection class</b>	IP20
-------------------------	------

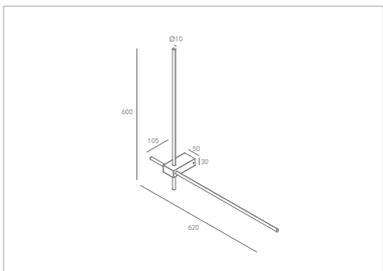

<b>Product Model No.</b>	AP-BD-0005A-15W	
<b>Packaging Detail</b>	58×58×14.5cm	
	STD PKG	1pcs
	N.W	0.36kgs
	G.W	1.36kgs


**AP-BD-0005A-15W**

DC30-42V15W LED 3000KDC / PR

Driver SEC: Constant Current: DC170mA



Warm White 3000K ∠110°

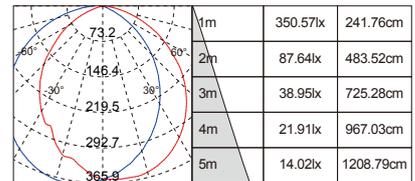

cd      Height      illuminance      Diameter

**Especially designed for:**

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.




**Various Brand of SMD LED Light Source:**



Product series

**AP-BD-0010A-7W**



LED WALL  
LAMP

TECHNICAL SPECIFICATIONS

Input (Optional)	220-240V~50/60 Hz
Maximum Wattage	7W±10% Max

Number of LEDs	1 LEDs COB
----------------	------------

Luminous Flux	144LM (3000K)
---------------	---------------

Main Material	Aluminum
---------------	----------

Color Temperature	3000K / 4000K / 6500K
-------------------	-----------------------

CRI	≥90
-----	-----

Power Factor	≥0.8
--------------	------


Working Temperature	-10°C~45°C
---------------------	------------

Beam Angle (Optional)	110°
-----------------------	------

Fixture Dimmable	Non-dimmable
------------------	--------------

Electrical	Internal Driver
------------	-----------------

Protection class	IP20
------------------	------

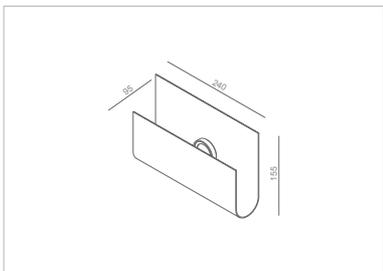


Product Model No.	AP-BD-0010A-7W	
Packaging Detail	62×52×30cm	
	STD PKG	8pcs
	N.W	8.94kgs
	G.W	11.5kgs


AP-BD-0010A-7W

DC30-42V7W LED 3000KDC / PRI:140lm220-240/ incl. -V~ 50/60 Hz 0.050A

Driver SEC: Constant Current: DC170mA



Warm White 3000K ∠110°

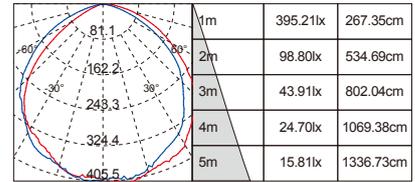

cd Height illuminance Diameter

Especially designed for:

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.



Various Brand of COB LED Light Source:



LED WALL  
LAMP

TECHNICAL SPECIFICATIONS

Input (Optional)	220-240V~50/60 Hz
Maximum Wattage	7W±10% Max

Number of LEDs	1 LEDs COB
----------------	------------

Luminous Flux	144LM (3000K)
---------------	---------------

Main Material	Aluminum
---------------	----------

Color Temperature	3000K / 4000K / 6500K
-------------------	-----------------------

CRI	≥90
-----	-----

Power Factor	≥0.8
--------------	------


Working Temperature	-10°C~45°C
---------------------	------------

Beam Angle (Optional)	110°
-----------------------	------

Fixture Dimmable	Non-dimmable
------------------	--------------

Electrical	Internal Driver
------------	-----------------

Protection class	IP20
------------------	------

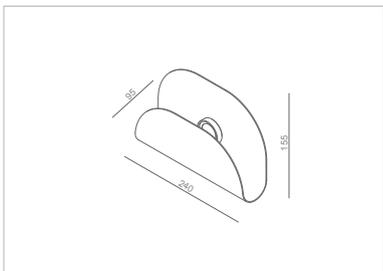

Product Model No.	AP-BD-0011A-7W	
Packaging Detail	62×52×30cm	
	STD PKG	8pcs
	N.W	9.07kgs
	G.W	12.07kgs


AP-BD-0011A-7W

DC30-42V7W LED 3000KDC / PRI

Driver SEC: Constant Current: DC170mA



Warm White 3000K ∠110°

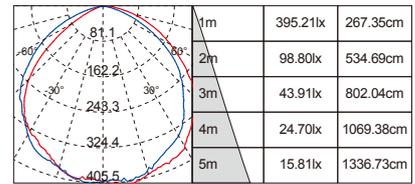

cd Height illuminance Diameter

Especially designed for:

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.



Various Brand of COB LED Light Source:



LED WALL  
LAMP

TECHNICAL SPECIFICATIONS

Input (Optional)	220-240V~50/60 Hz
Maximum Wattage	7W±10% Max

Number of LEDs	1 LEDs COB
----------------	------------

Luminous Flux	144LM (3000K)
---------------	---------------

Main Material	Aluminum
---------------	----------

Color Temperature	3000K / 4000K / 6500K
-------------------	-----------------------

CRI	≥90
-----	-----

Power Factor	≥0.8
--------------	------


Working Temperature	-10°C~45°C
---------------------	------------

Beam Angle (Optional)	110°
-----------------------	------

Fixture Dimmable	Non-dimmable
------------------	--------------

Electrical	Internal Driver
------------	-----------------

Protection class	IP20
------------------	------

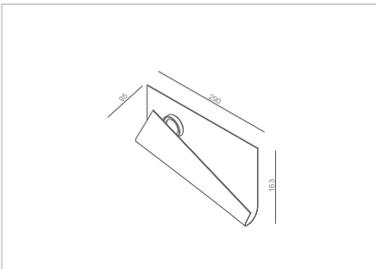

Especially designed for:

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.



Product Model No.	AP-BD-0012A-7W	
Packaging Detail	76.5×44.5×30cm	
	STD PKG	8pcs
	N.W	8.94kgs
	G.W	11.94kgs


AP-BD-0012A-7W

DC30-42V7W LED 3000KDC / PRI

Driver SEC: Constant Current: DC170mA



Warm White 3000K ∠110°

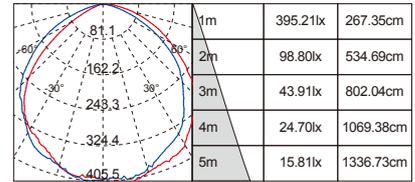

cd      Height      illuminance      Diameter

Various Brand of COB LED Light Source:



LED WALL  
LAMP

TECHNICAL SPECIFICATIONS

Input (Optional)	220-240V~50/60 Hz
Maximum Wattage	7W±10% Max

Number of LEDs	1 LEDs COB
----------------	------------

Luminous Flux	144LM (3000K)
---------------	---------------

Main Material	Aluminum
---------------	----------

Color Temperature	3000K / 4000K / 6500K
-------------------	-----------------------

CRI	≥90
-----	-----

Power Factor	≥0.8
--------------	------


Working Temperature	-10°C~45°C
---------------------	------------

Beam Angle (Optional)	110°
-----------------------	------

Fixture Dimmable	Non-dimmable
------------------	--------------

Electrical	Internal Driver
------------	-----------------

Protection class	IP20
------------------	------

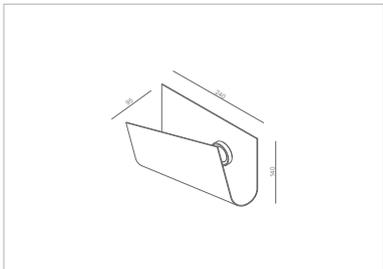

Product Model No.	AP-BD-0013A-7W	
Packaging Detail	76.5×44.5×30cm	
	STD PKG	8pcs
	N.W	8.85kgs
	G.W	11.85kgs


AP-BD-0013A-7W

DC30-42V7W LED 3000KDC / PRI:140lm220-240/ incl. -V~ 50/60 Hz 0.050A

Driver SEC: Constant Current: DC170mA



Warm White 3000K ∠110°

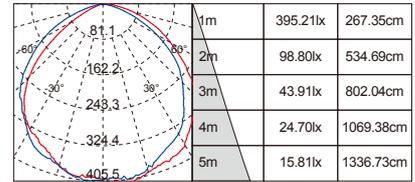

cd

Especially designed for:

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.




Various Brand of COB LED Light Source:



Product series

**AP-BD-0020A-13W**

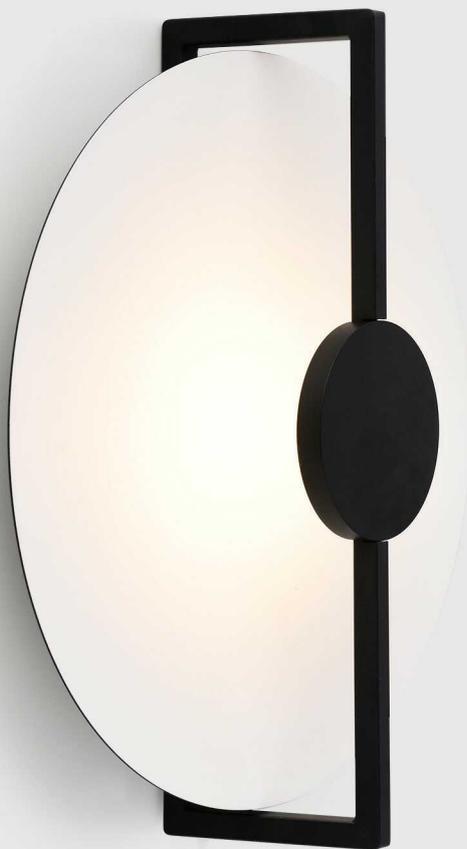

LED WALL  
LAMP

TECHNICAL SPECIFICATIONS

Input (Optional)	220-240V~50/60 Hz
Maximum Wattage	10W±10% Max


Number of LEDs	65 LEDs SMD
----------------	-------------

Luminous Flux	711LM (3000K)
---------------	---------------

Main Material	Aluminum & PS
---------------	---------------

Color Temperature	3000K / 4000K / 6500K
-------------------	-----------------------

CRI	≥90
Power Factor	≥0.92
Working Temperature	-10°C~45°C
Beam Angle (Optional)	110°
Fixture Dimmable	Non-dimmable
Electrical	Internal Driver
Protection class	IP20

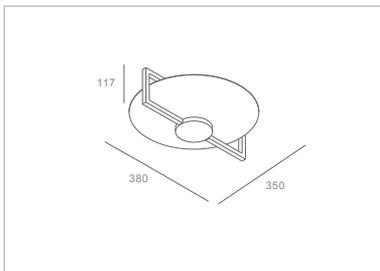

Especially designed for:

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.



Product Model No.	AP-BD-0020A-13W	
Packaging Detail 	45×45×48.5cm	
	STD PKG	3pcs
	N.W	4.5kgs
	G.W	6.5kgs


AP-BD-0020A-13W

DC36V13W LEDDC3000K/ PRI: 711lm220-240/ incl.V~ 50/60-Hz 0.088A

Driver SEC: Constant Current: DC360mA



Warm White 3000K ∠110°

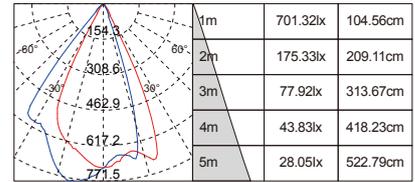

cd Height illuminance Diameter

Various Brand of SMD LED Light Source:



Product series

**AP-BD-0021A-26W**



LED WALL  
LAMP

TECHNICAL SPECIFICATIONS

Input (Optional)	220-240V~50/60 Hz
Maximum Wattage	26W±10% Max

Number of LEDs	130 LEDs SMD
----------------	--------------

Luminous Flux	1422LM (3000K)
---------------	----------------

Main Material	Aluminum & PS
---------------	---------------

Color Temperature	3000K / 4000K / 6500K
-------------------	-----------------------

CRI	≥90
-----	-----

Power Factor	≥0.92
--------------	-------


Working Temperature	-10°C~45°C
---------------------	------------

Beam Angle (Optional)	110°
-----------------------	------

Fixture Dimmable	Non-dimmable
------------------	--------------

Electrical	Internal Driver
------------	-----------------

Protection class	IP20
------------------	------

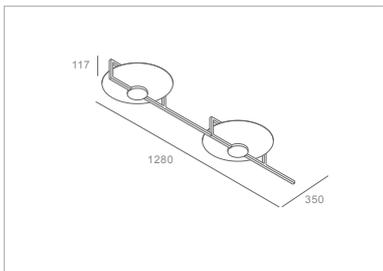

Product Model No.	AP-BD-0021A-26W	
Packaging Detail	135×43×19cm	
	STD PKG	1pcs
	N.W	3.2kgs
	G.W	5.2kgs

AP-BD-0021A-26W

DC36V26W LEDDC3000K/ PRI: 14  
Driver SEC: Constant Current: DC360mA



Warm White 3000K ∠110°

	1m	701.32lx	104.56cm
	2m	175.33lx	209.11cm
	3m	77.92lx	313.67cm
	4m	43.83lx	418.23cm
	5m	28.05lx	522.79cm
	cd	Height	illuminance

Especially designed for:

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.




Various Brand of SMD LED Light Source:



Product series


**AP-BD-0050A-7W**

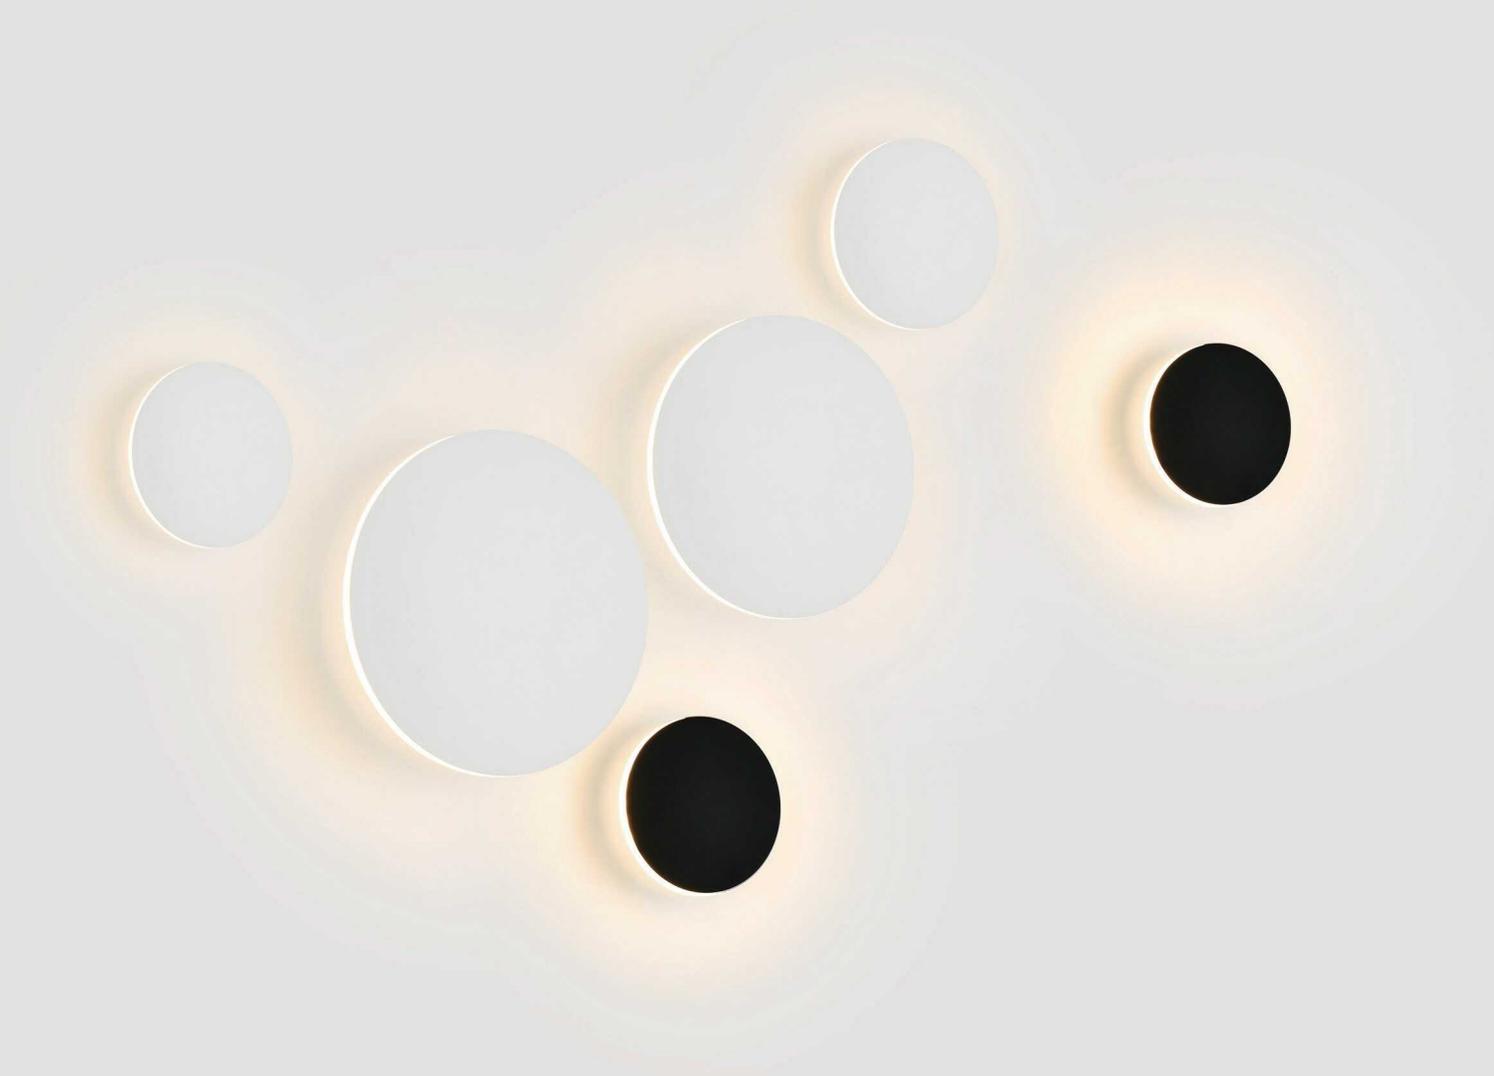

LED WALL  
LAMP

TECHNICAL SPECIFICATIONS

<b>Input (Optional)</b>	220-240V~50/60 Hz
<b>Maximum Wattage</b>	7W±10% Max
<b>Number of LEDs</b>	
35 LEDs SMD	
<b>Luminous Flux</b>	
255LM (3000K)	
<b>Main Material</b>	
Aluminum & Iron	
<b>Color Temperature</b>	
3000K / 4000K / 6500K	
<b>CRI</b>	≥90
<b>Power Factor</b>	≥0.8
<b>Working Temperature</b>	-10°C~45°C
<b>Beam Angle (Optional)</b>	110°
<b>Fixture Dimmable</b>	Non-dimmable
<b>Electrical</b>	Internal Driver
<b>Protection class</b>	IP20

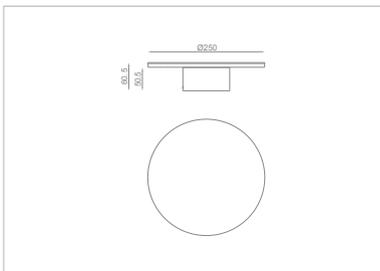

**Especially designed for:**

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.




<b>Product Model No.</b>	AP-BD-0050A-7W	
<b>Packaging Detail</b> 	62×31.5×35cm	
	STD PKG	6pcs
	N.W	4.8kgs
	G.W	6.8kgs

**AP-BD-0050A-7W**

DC15-25VDC7W LED 3000K/ PRI:



Warm White 3000K ∠110°

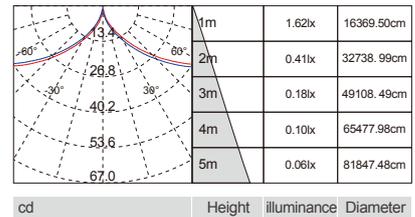

Various Brand of SMD LED Light Source:



LED WALL  
LAMP

TECHNICAL SPECIFICATIONS

Input (Optional)	220-240V~50/60 Hz
Maximum Wattage	4W±10% Max

Number of LEDs	10 LEDs SMD
----------------	-------------

Luminous Flux	144LM (3000K)
---------------	---------------

Main Material	Aluminum & Iron
---------------	-----------------

Color Temperature	3000K / 4000K / 6500K
-------------------	-----------------------

CRI	≥90
-----	-----

Power Factor	≥0.8
--------------	------


Working Temperature	-10°C~45°C
---------------------	------------

Beam Angle (Optional)	110°
-----------------------	------

Fixture Dimmable	Non-dimmable
------------------	--------------

Electrical	Internal Driver
------------	-----------------


Protection class	IP20
------------------	------

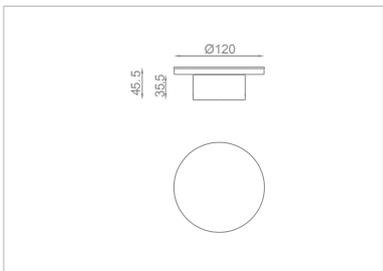


Product Model No.	AP-BD-0051A-4W	
Packaging Detail	56×37×35.5cm	
	STD PKG	30pcs
	N.W	12.6kgs
	G.W	14.4kgs

AP-BD-0051A-4W

DC12-21VDC4W LED 3000K/ PRI:



Warm White 3000K ∠110°

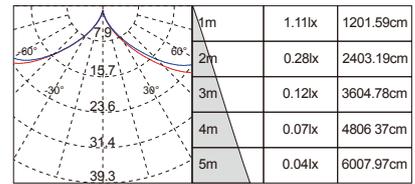

cd      Height      Illuminance      Diameter

Especially designed for:

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.




Various Brand of SMD LED Light Source:



Product series


**AP-BD-0052A-7W**

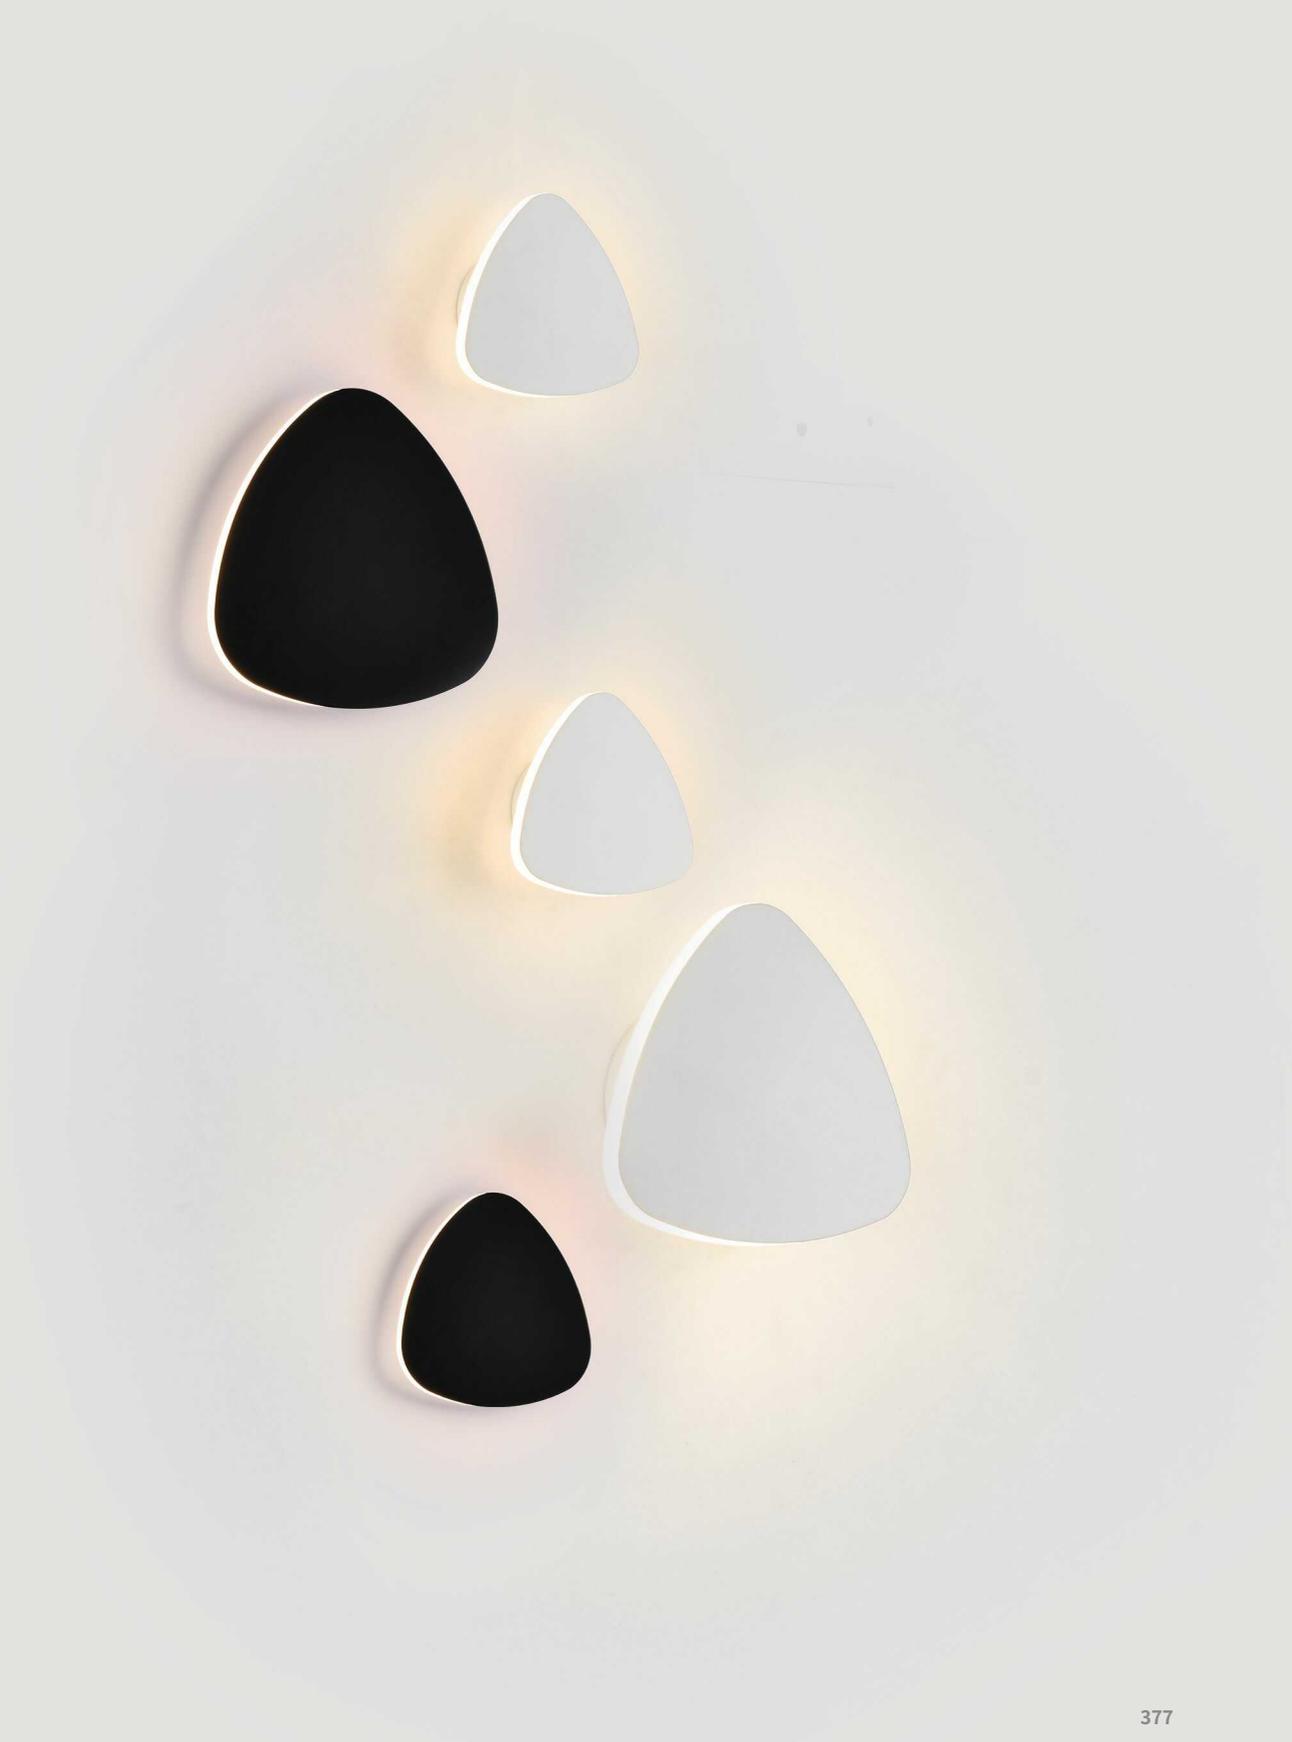

LED WALL  
LAMP

TECHNICAL SPECIFICATIONS

<b>Input (Optional)</b>	220-240V~50/60 Hz
<b>Maximum Wattage</b>	7W±10% Max
<b>Number of LEDs</b>	
35 LEDs SMD	
<b>Luminous Flux</b>	
260LM (3000K)	
<b>Main Material</b>	
Aluminum & Iron	
<b>Color Temperature</b>	
3000K / 4000K / 6500K	
<b>CRI</b>	≥90
<b>Power Factor</b>	≥0.8
<b>Working Temperature</b>	-10°C~45°C
<b>Beam Angle (Optional)</b>	110°
<b>Fixture Dimmable</b>	Non-dimmable
<b>Electrical</b>	Internal Driver
<b>Protection class</b>	IP20

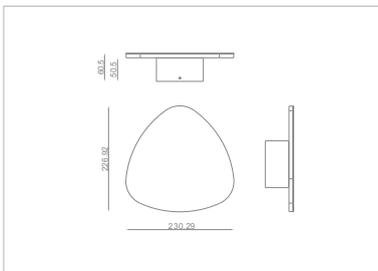

**Especially designed for:**


Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.




<b>Product Model No.</b>	AP-BD-0052A-7W	
<b>Packaging Detail</b>	62×31.5×35cm	
	STD PKG	6pcs
	N.W	4.8kgs
	G.W	6.8kgs

**AP-BD-0052A-7W**

DC15-25VDC7W LED 3000K/ PRI:



Warm White 3000K ∠110°

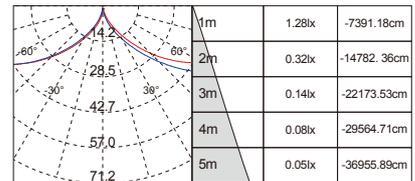

cd      Height      illuminance      Diameter


Various Brand of SMD LED Light Source:



LED WALL  
LAMP

TECHNICAL SPECIFICATIONS

<b>Input (Optional)</b>	220-240V~50/60 Hz
<b>Maximum Wattage</b>	4W±10% Max
<b>Number of LEDs</b>	10 LEDs SMD
<b>Luminous Flux</b>	145LM (3000K)
<b>Main Material</b>	Aluminum & Iron
<b>Color Temperature</b>	3000K / 4000K / 6500K
<b>CRI</b>	≥90
<b>Power Factor</b>	≥0.8
<b>Working Temperature</b>	-10°C~45°C
<b>Beam Angle (Optional)</b>	110°
<b>Fixture Dimmable</b>	Non-dimmable
<b>Electrical</b>	Internal Driver
<b>Protection class</b>	IP20

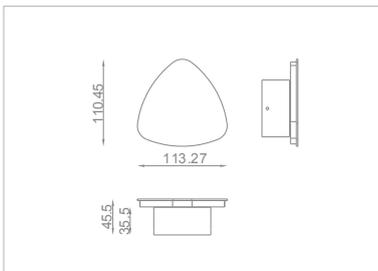

**Especially designed for:**

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.



<b>Product Model No.</b>	AP-BD-0053A-4W	
<b>Packaging Detail</b>	56×37×35.5cm	
	STD PKG	30pcs
	N.W	12.6kgs
	G.W	14.4kgs

**AP-BD-0053A-4W**

DC12-21VDC4W LED 3000K/ PRI:



Warm White 3000K ∠110°


	1m	1.29lx	1346.27cm
	2m	0.32lx	2692.53cm
	3m	0.14lx	4038.80cm
	4m	0.08lx	5385.06cm
	5m	0.05lx	6731.33cm
<b>cd</b>	<b>Height</b>	<b>illuminance</b>	<b>Diameter</b>

Various Brand of SMD LED Light Source:



Product series

# AP-BD-0060A-6W

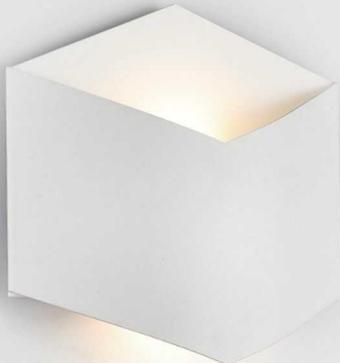

LED WALL  
LAMP

TECHNICAL SPECIFICATIONS

Input (Optional)	220-240V~50/60 Hz
Maximum Wattage	6W±10% Max

Number of LEDs	2 LEDs SMD
----------------	------------

Luminous Flux	187LM (3000K)
---------------	---------------

Main Material	Aluminum & Iron
---------------	-----------------

Color Temperature	3000K / 4000K / 6500K
-------------------	-----------------------

CRI	≥90
-----	-----

Power Factor	≥0.8
--------------	------


Working Temperature	-10°C~45°C
---------------------	------------

Beam Angle (Optional)	110°
-----------------------	------

Fixture Dimmable	Non-dimmable
------------------	--------------


Electrical	Internal Driver
------------	-----------------

Protection class	IP20
------------------	------

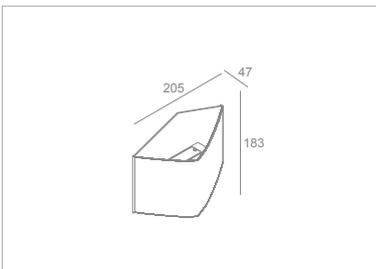

Especially designed for:

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.




Product Model No.	AP-BD-0060A-6W	
Packaging Detail	44×33×29cm	
	STD PKG	16pcs
	N.W	12.6kgs
	G.W	14.4kgs

AP-BD-0060A-6W

DC12-21VDC6W LED 3000K/ PRI:



Warm White 3000K ∠ 110°

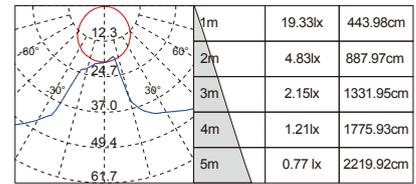

cd      Height      illuminance      Diameter

Various Brand of SMD LED Light Source:



Product series

**AP-BD-0070A-5W**



LED WALL  
LAMP

TECHNICAL SPECIFICATIONS

Input (Optional)	220-240V~50/60 Hz
Maximum Wattage	5W±10% Max

Number of LEDs	1 LEDs COB
----------------	------------

Luminous Flux	515LM (3000K)
---------------	---------------

Main Material	Aluminum & PC Lens Diffuser
---------------	-----------------------------

Color Temperature	3000K / 4000K / 6500K
-------------------	-----------------------

CRI	≥90
-----	-----

Power Factor	≥0.8
--------------	------


Working Temperature	-10°C~45°C
---------------------	------------

Beam Angle (Optional)	45°
-----------------------	-----

Fixture Dimmable	Non-dimmable
------------------	--------------

Electrical	Internal Driver
------------	-----------------

Protection class	IP20
------------------	------

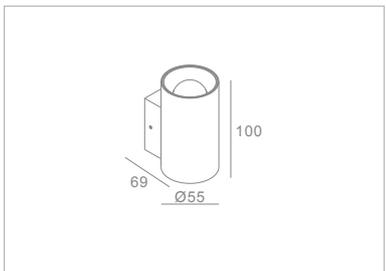

Especially designed for:

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.




Product Model No.	AP-BD-0070A-5W	
Packaging Detail 	30.5×28×34cm	
	STD PKG	24pcs
	N.W	6.6kgs
	G.W	8.6kgs

AP-BD-0070A-5W

DC2.5-5VDC5W LED(COB) PRI:3000K220-240515lmV~/ incl.50/60-Hz 0.1A  
Driver SEC: Constant Current: DC2000mA



Warm White 3000K ∠45°

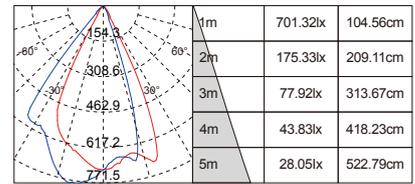

cd Height illuminance Diameter

Option colors



Various Brand of COB LED Light Source:



Product series

**AP-BD-0071A-10W**



LED WALL  
LAMP

TECHNICAL SPECIFICATIONS

Input (Optional)	220-240V~50/60 Hz
Maximum Wattage	10W±10% Max

Number of LEDs	2 LEDs COB
----------------	------------

Luminous Flux	1030LM (3000K)
---------------	----------------

Main Material	Aluminum & PC Lens Diffuser
---------------	-----------------------------

Color Temperature	3000K / 4000K / 6500K
-------------------	-----------------------

CRI	≥90
-----	-----

Power Factor	≥0.92
--------------	-------


Working Temperature	-10°C~45°C
---------------------	------------

Beam Angle (Optional)	45°
-----------------------	-----

Fixture Dimmable	Non-dimmable
------------------	--------------

Electrical	Internal Driver
------------	-----------------

Protection class	IP20
------------------	------

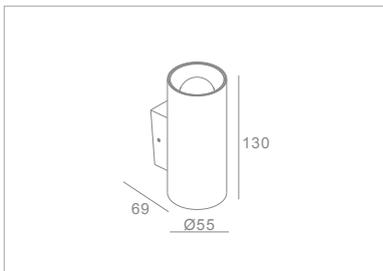

Especially designed for:

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.




Product Model No.	AP-BD-0071A-10W	
Packaging Detail 	32.5×32×27.5cm	
	STD PKG	18pcs
	N.W	7.60kgs
	G.W	9.60kgs

AP-BD-0071A-10W

DC2000mA10W LED(COB)DC2.5-5VDC3000K 1030lm/ PRI: 220-240/ incl. -V~ 50/60 Hz 0.1A



Warm White 3000K ∠65°

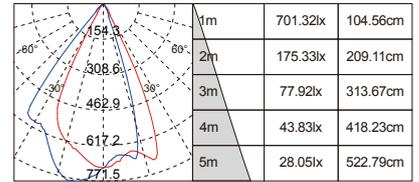

cd Height illuminance Diameter

Option colors



Various Brand of COB LED Light Source:



Product series

**AP-BD-0072A-10W**



LED WALL  
LAMP

TECHNICAL SPECIFICATIONS

Input (Optional)	220-240V~50/60 Hz
Maximum Wattage	10W±10% Max

Number of LEDs	2 LEDs COB
----------------	------------

Luminous Flux	1030LM (3000K)
---------------	----------------

Main Material	Aluminum & PC Lens Diffuser
---------------	-----------------------------

Color Temperature	3000K / 4000K / 6500K
-------------------	-----------------------

CRI	≥90
-----	-----

Power Factor	≥0.92
--------------	-------


Working Temperature	-10°C~45°C
---------------------	------------

Beam Angle (Optional)	45°
-----------------------	-----

Fixture Dimmable	Non-dimmable
------------------	--------------

Electrical	External Driver
------------	-----------------

Protection class	IP20
------------------	------

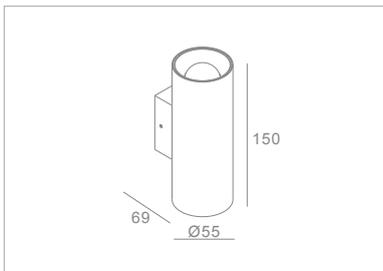

**Especially designed for:**


Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.




Product Model No.	AP-BD-0072A-10W	
Packaging Detail 	37×32×27.5cm	
	STD PKG	18pcs
	N.W	7.56kgs
	G.W	9.56kgs

**AP-BD-0072A-10W**

DC2000mA10W LED(COB)DC2.5-5VDC3000K 1030lm/ PRI: 220-240/ incl. -V~ 50/60 Hz 0.1A



Warm White 3000K ∠ 45°

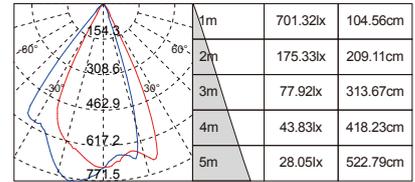

cd Height illuminance Diameter

**Option colors**



**Various Brand of COB LED Light Source:**



Product series

**AP-BD-0073A-10W**



LED WALL  
LAMP

TECHNICAL SPECIFICATIONS

Input (Optional)	220-240V~50/60 Hz
Maximum Wattage	10W±10% Max

Number of LEDs	2 LEDs COB
----------------	------------

Luminous Flux	1030LM (3000K)
---------------	----------------

Main Material	Aluminum & PC Lens Diffuser
---------------	-----------------------------

Color Temperature	3000K / 4000K / 6500K
-------------------	-----------------------

CRI	≥90
-----	-----

Power Factor	≥0.92
--------------	-------


Working Temperature	-10°C~45°C
---------------------	------------

Beam Angle (Optional)	45°
-----------------------	-----

Fixture Dimmable	Non-dimmable
------------------	--------------

Electrical	Internal Driver
------------	-----------------

Protection class	IP20
------------------	------

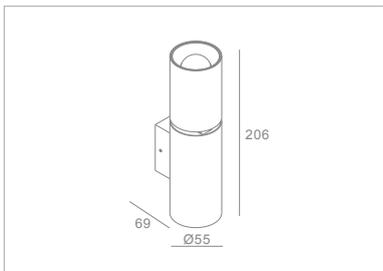

**Especially designed for:**

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.




Product Model No.	AP-BD-0073A-10W	
Packaging Detail	48×32×27.5cm	
	STD PKG	18pcs
	N.W	10.10kgs
	G.W	12.10kgs

**AP-BD-0073A-10W**

10W LED(COB) 3000K 515lm / incl. PRI: 220-240 V~ 50/60 Hz



Warm White 3000K ∠45°

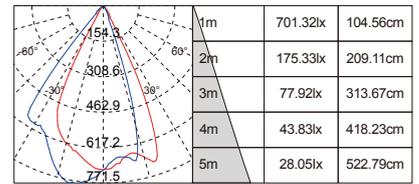

cd Height illuminance Diameter

**Option colors**



**Various Brand of COB LED Light Source:**



Product series


**AP-BD-0074A-5W**



LED WALL  
LAMP

TECHNICAL SPECIFICATIONS	
Input (Optional)	220-240V~50/60 Hz
Maximum Wattage	5W±10% Max
Number of LEDs	
1 LEDs COB	
Luminous Flux	
515LM (3000K)	
Main Material	
Aluminum & PC Lens Diffuser	
Color Temperature	
3000K / 4000K / 6500K	

CRI	≥90
Power Factor	≥0.8
Working Temperature	-10°C~45°C
Beam Angle (Optional)	45°
Fixture Dimmable	Non-dimmable
Electrical	Internal Driver
Protection class	IP20

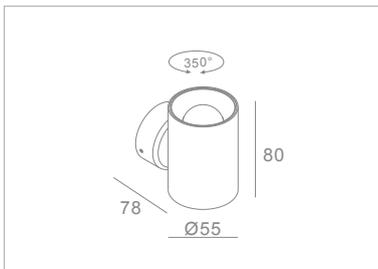

**Especially designed for:**

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.



Product Model No.	AP-BD-0074A-5W	
Packaging Detail	32×32×25cm	
	STD PKG	18pcs
	N.W	4.91kgs
	G.W	6.91kgs

**AP-BD-0074A-10W**

10W LED(COB) 3000K 515lm / incl. PRI: 220-240 V~ 50/60 Hz



Warm White 3000K ∠45°

	1m	701.32lx	104.56cm
	2m	175.33lx	209.11cm
	3m	77.92lx	313.67cm
	4m	43.83lx	418.23cm
	5m	28.05lx	522.79cm
cd	Height	illuminance	Diameter

**Option colors**



Various Brand of COB LED Light Source:



Product series

**AP-BD-0100A-12W**



LED WALL  
LAMP

TECHNICAL SPECIFICATIONS

Input (Optional)	220-240V~50/60 Hz
Maximum Wattage	12W±10% Max

Number of LEDs	2 LEDs COB
----------------	------------

Luminous Flux	1052LM (3000K)
---------------	----------------

Main Material	Aluminum
---------------	----------

Color Temperature	3000K / 4000K / 6500K
-------------------	-----------------------

CRI	≥90
-----	-----

Power Factor	≥0.55
--------------	-------


Working Temperature	-10°C~45°C
---------------------	------------

Beam Angle (Optional)	15°
-----------------------	-----

Fixture Dimmable	Non-dimmable
------------------	--------------

Electrical	Internal Driver
------------	-----------------

Protection class	IP65
------------------	------

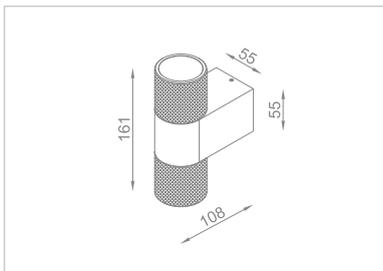

Especially designed for:


Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.




Product Model No.	AP-BD-0100A-12W	
Packaging Detail	51.5×43×26.5cm	
	STD PKG	18pcs
	N.W	4.36kgs
	G.W	6.36kgs

AP-BD-0100A-12W


DC36V12W LEDDC3000K/ PRI: 10  
Driver SEC: Constant Current: DC300mA



Warm White 3000K ∠15°

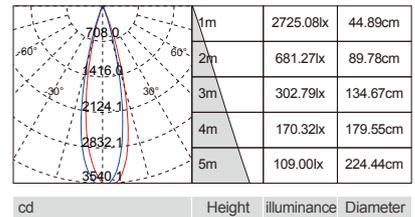

Option colors



Various Brand of COB LED Light Source:



Product series

# AP-BD-0101A-6W



LED WALL  
LAMP

TECHNICAL SPECIFICATIONS

Input (Optional)	220-240V~50/60 Hz
Maximum Wattage	6W±10% Max

Number of LEDs	1 LEDs COB
----------------	------------

Luminous Flux	526LM (3000K)
---------------	---------------

Main Material	Aluminum
---------------	----------

Color Temperature	3000K / 4000K / 6500K
-------------------	-----------------------

CRI	≥90
-----	-----

Power Factor	≥0.55
--------------	-------


Working Temperature	-10°C~45°C
---------------------	------------

Beam Angle (Optional)	15°
-----------------------	-----

Fixture Dimmable	Non-dimmable
------------------	--------------

Electrical	Internal Driver
------------	-----------------

Protection class	IP65
------------------	------

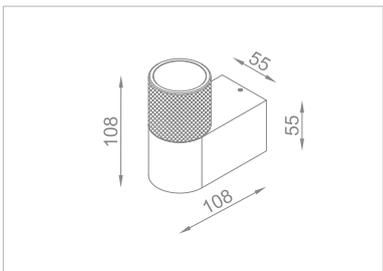

Especially designed for:

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.




Product Model No.	AP-BD-0101A-6W	
Packaging Detail 	51.5×43×26.5cm	
	STD PKG	18pcs
	N.W	4.36kgs
	G.W	6.36kgs

AP-BD-0101A-6W


DC36V6W LEDDC3000K/ PRI:526l  
Driver SEC: Constant Current: DC150mA



Warm White 3000K ∠15°

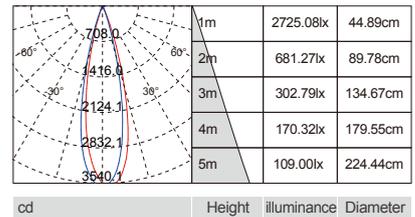

Option colors



Various Brand of COB LED Light Source:



Product series

# AP-BD-0110A-4W+2W



LED WALL  
LAMP

TECHNICAL SPECIFICATIONS

Input (Optional)	220-240V~50/60 Hz
Maximum Wattage	6W±10% Max

Number of LEDs	48 LEDs SMD + 1 LEDs COB
----------------	--------------------------

Luminous Flux	214LM (3000K)
---------------	---------------

Main Material	Aluminum
---------------	----------

Color Temperature	3000K / 4000K / 6500K
-------------------	-----------------------

CRI	≥90
-----	-----

Power Factor	≥0.55
--------------	-------


Working Temperature	-10°C~45°C
---------------------	------------

Beam Angle (Optional)	25°
-----------------------	-----

Fixture Dimmable	Non-dimmable
------------------	--------------

Electrical	Internal Driver
------------	-----------------

Protection class	IP20
------------------	------

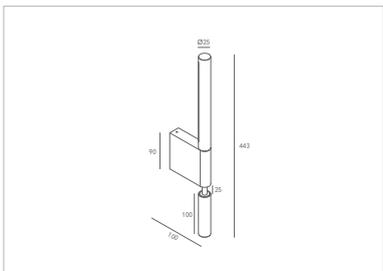

**Especially designed for:**

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.



Product Model No.	AP-BD-0110A-4W+2W	
Packaging Detail 	47×35×38cm	
	STD PKG	18pcs
	N.W	10.62kgs
	G.W	12.62kgs


## AP-BD-0110A-4W+2W

DC30-42VDC4W+2W LED 3000K/ PRI: 220-240/214lm / incl.V~ 50/60-Hz 0.050A

Driver SEC: Constant Current: DC170mA



Warm White 3000K ∠25°

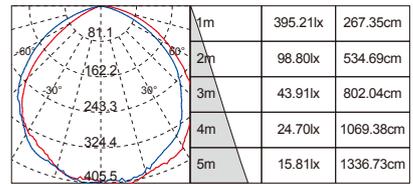

cd      Height      illuminance      Diameter

### Features: light controlled switch



### Various Brand of SMD LED Light Source:



Product series

**AP-BD-0130A-3W**



LED WALL  
LAMP

TECHNICAL SPECIFICATIONS

Input (Optional)	220-240V~50/60 Hz
Maximum Wattage	3W±10% Max

Number of LEDs	1 LEDs COB
----------------	------------

Luminous Flux	43LM (3000K)
---------------	--------------

Main Material	Aluminum
---------------	----------

Color Temperature	3000K / 4000K / 6500K
-------------------	-----------------------

CRI	≥90
-----	-----

Power Factor	≥0.8
--------------	------


Working Temperature	-10°C~45°C
---------------------	------------

Beam Angle (Optional)	25°
-----------------------	-----

Fixture Dimmable	Non-dimmable
------------------	--------------

Electrical	Internal Driver
------------	-----------------

Protection class	IP65
------------------	------

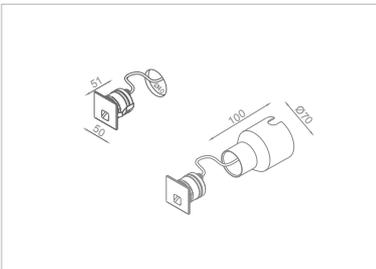

Especially designed for:

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.



Product Model No.	AP-BD-0130A-3W	
Packaging Detail 	32×24×34cm	
	STD PKG	36pcs
	N.W	8.94kgs
	G.W	11.5kgs


AP-BD-0130A-3W

/3WPRI:LED220-2403000K V~43lm50/60/ incl.Hz-0.030A

Driver SEC: Constant Current: DC600mADC3-6V DC



Warm White 3000K ∠25°

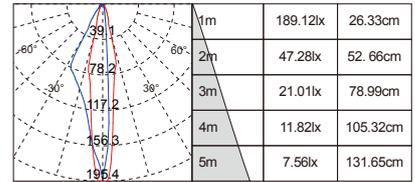

cd      Height      illuminance      Diameter

Various Brand of COB LED Light Source:



LED WALL  
LAMP

TECHNICAL SPECIFICATIONS

Input (Optional)	220-240V~50/60 Hz
Maximum Wattage	3W±10% Max

Number of LEDs	1 LEDs COB
----------------	------------

Luminous Flux	32LM (3000K)
---------------	--------------

Main Material	Aluminum
---------------	----------

Color Temperature	3000K / 4000K / 6500K
-------------------	-----------------------

CRI	≥90
-----	-----

Power Factor	≥0.8
--------------	------


Working Temperature	-10°C~45°C
---------------------	------------

Beam Angle (Optional)	25°
-----------------------	-----

Fixture Dimmable	Non-dimmable
------------------	--------------

Electrical	Internal Driver
------------	-----------------

Protection class	IP65
------------------	------

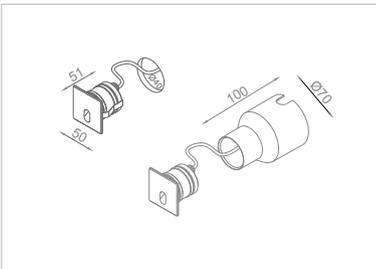

Especially designed for:

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.



Product Model No.	AP-BD-0131A-3W	
Packaging Detail	32×24×34cm	
	STD PKG	36pcs
	N.W	8.94kgs
	G.W	11.5kgs


AP-BD-0131A-3W

/3WPR1:LED220-2403000K V~32lm50/60/ incl.Hz-0.030A

Driver SEC: Constant Current: DC600mADC3-6V DC



Warm White 3000K ∠25°

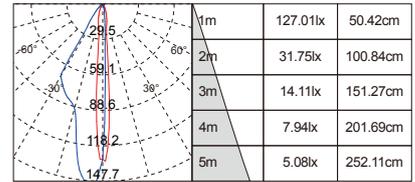

cd Height illuminance Diameter

Various Brand of COB LED Light Source:



Product series

**AP-BD-0132A-3W**



LED WALL  
LAMP

TECHNICAL SPECIFICATIONS

Input (Optional)	220-240V~50/60 Hz
Maximum Wattage	3W±10% Max

Number of LEDs	1 LEDs COB
----------------	------------

Luminous Flux	35LM (3000K)
---------------	--------------

Main Material	Aluminum
---------------	----------

Color Temperature	3000K / 4000K / 6500K
-------------------	-----------------------

CRI	≥90
-----	-----

Power Factor	≥0.8
--------------	------


Working Temperature	-10°C~45°C
---------------------	------------

Beam Angle (Optional)	25°
-----------------------	-----

Fixture Dimmable	Non-dimmable
------------------	--------------

Electrical	Internal Driver
------------	-----------------

Protection class	IP65
------------------	------

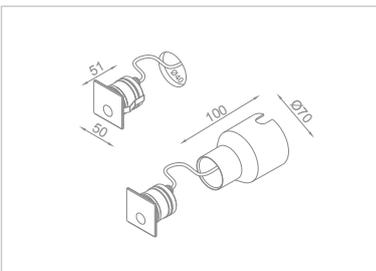

Especially designed for:

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.




Product Model No.	AP-BD-0132A-3W	
Packaging Detail	62×52×30cm	
	STD PKG	8pcs
	N.W	8.94kgs
	G.W	11.5kgs

AP-BD-0132A-3W

/3WPRI:LED220-2403000K V~35lm50/60/ incl.Hz-0.030A  
Driver SEC: Constant Current: DC600mADC3-6V DC



Warm White 3000K ∠25°

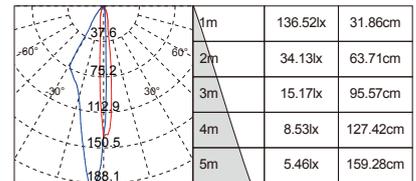

cd Height illuminance Diameter


Various Brand of COB LED Light Source:



LED WALL  
LAMP

TECHNICAL SPECIFICATIONS

<b>Input (Optional)</b>	220-240V~50/60 Hz
<b>Maximum Wattage</b>	3W±10% Max
<b>Number of LEDs</b>	
1 LEDs COB	
<b>Luminous Flux</b>	
32LM (3000K)	
<b>Main Material</b>	
Aluminum	
<b>Color Temperature</b>	
3000K / 4000K / 6500K	
<b>CRI</b>	≥90
<b>Power Factor</b>	≥0.8
<b>Working Temperature</b>	-10°C~45°C
<b>Beam Angle (Optional)</b>	25°
<b>Fixture Dimmable</b>	Non-dimmable
<b>Electrical</b>	
Internal Driver	
<b>Protection class</b>	IP65

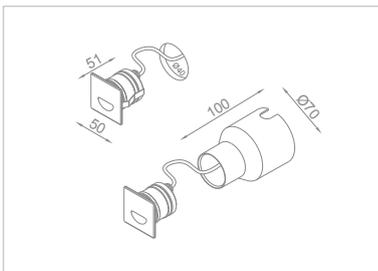

**Especially designed for:**

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.




<b>Product Model No.</b>	AP-BD-0133A-3W	
<b>Packaging Detail</b> 	62×52×30cm	
	STD PKG	8pcs
	N.W	8.94kgs
	G.W	11.5kgs

**AP-BD-0133A-3W**

/3WPRI:LED220-2403000K V~32lm50/60/ incl.Hz-0.030A  
Driver SEC: Constant Current: DC600mADC3-6V DC



Warm White 3000K ∠25°

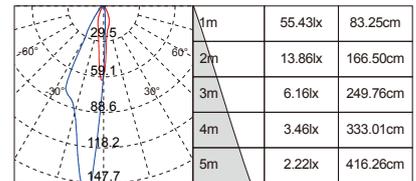

cd      Height      illuminance      Diameter

Various Brand of COB LED Light Source:



Product series

**AP-BD-0134A-3W**



LED WALL  
LAMP

TECHNICAL SPECIFICATIONS

Input (Optional)	220-240V~50/60 Hz
Maximum Wattage	3W±10% Max

Number of LEDs	1 LEDs COB
----------------	------------

Luminous Flux	144LM (3000K)
---------------	---------------

Main Material	Aluminum
---------------	----------

Color Temperature	3000K / 4000K / 6500K
-------------------	-----------------------

CRI	≥90
-----	-----

Power Factor	≥0.8
--------------	------


Working Temperature	-10°C~45°C
---------------------	------------

Beam Angle (Optional)	25°
-----------------------	-----

Fixture Dimmable	Non-dimmable
------------------	--------------

Electrical	Internal Driver
------------	-----------------

Protection class	IP65
------------------	------

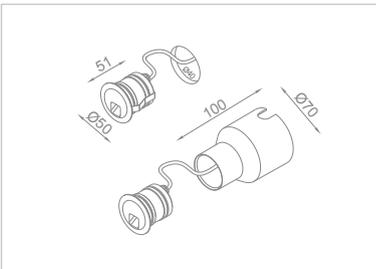


Product Model No.	AP-BD-0134A-3W	
Packaging Detail	62×52×30cm	
	STD PKG	8pcs
	N.W	8.94kgs
	G.W	11.5kgs

AP-BD-0134A-3W

DC3-6V3W LED DC3000K/ PRI:140lm220-240/ incl.V~50/60 Hz 0.030A  
Driver SEC: Constant Current: DC600mA



Warm White 3000K ∠25°

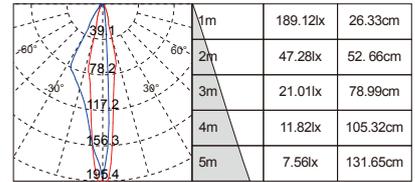

cd Height illuminance Diameter

Especially designed for:

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.



Various Brand of COB LED Light Source:



LED WALL  
LAMP

TECHNICAL SPECIFICATIONS

Input (Optional)	220-240V~50/60 Hz
Maximum Wattage	3W±10% Max

Number of LEDs	1 LEDs COB
----------------	------------

Luminous Flux	144LM (3000K)
---------------	---------------

Main Material	Aluminum
---------------	----------

Color Temperature	3000K / 4000K / 6500K
-------------------	-----------------------

CRI	≥90
-----	-----

Power Factor	≥0.8
--------------	------


Working Temperature	-10°C~45°C
---------------------	------------

Beam Angle (Optional)	25°
-----------------------	-----

Fixture Dimmable	Non-dimmable
------------------	--------------

Electrical	Internal Driver
------------	-----------------

Protection class	IP65
------------------	------

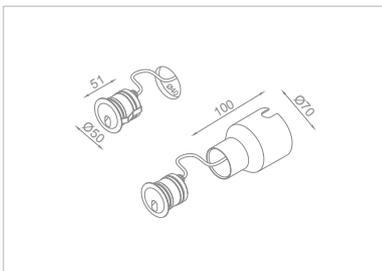

Especially designed for:

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.



Product Model No.	AP-BD-0135A-3W	
Packaging Detail	62×52×30cm	
	STD PKG	8pcs
	N.W	8.94kgs
	G.W	11.5kgs


AP-BD-0135A-3W

DC3-6V3W LED DC3000K/ PRI:140lm220-240/ incl.V~50/60 Hz 0.030A

Driver SEC: Constant Current: DC600mA



Warm White 3000K ∠25°

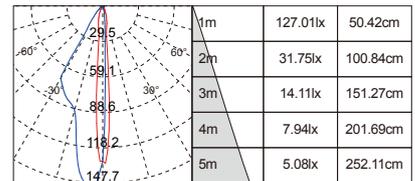

cd Height illuminance Diameter

Various Brand of COB LED Light Source:



Product series

**AP-BD-0136A-3W**



LED WALL  
LAMP

TECHNICAL SPECIFICATIONS

Input (Optional)	220-240V~50/60 Hz
Maximum Wattage	3W±10% Max

Number of LEDs	1 LEDs COB
----------------	------------

Luminous Flux	144LM (3000K)
---------------	---------------

Main Material	Aluminum
---------------	----------

Color Temperature	3000K / 4000K / 6500K
-------------------	-----------------------

CRI	≥90
-----	-----

Power Factor	≥0.8
--------------	------


Working Temperature	-10°C~45°C
---------------------	------------

Beam Angle (Optional)	25°
-----------------------	-----

Fixture Dimmable	Non-dimmable
------------------	--------------

Electrical	Internal Driver
------------	-----------------

Protection class	IP65
------------------	------

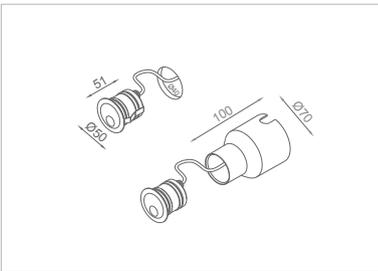

Especially designed for:

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.




Product Model No.	AP-BD-0136A-3W	
Packaging Detail	62×52×30cm	
	STD PKG	8pcs
	N.W	8.94kgs
	G.W	11.5kgs

AP-BD-0136A-3W

DC3-6V3W LED DC3000K/ PRI:140lm220-240/ incl.V~50/60 Hz 0.030A  
Driver SEC: Constant Current: DC600mA



Warm White 3000K ∠25°

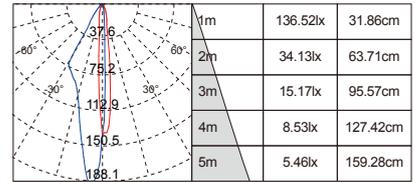

cd Height illuminance Diameter

Various Brand of COB LED Light Source:



LED WALL  
LAMP

TECHNICAL SPECIFICATIONS

Input (Optional)	220-240V~50/60 Hz
Maximum Wattage	3W±10% Max

Number of LEDs	1 LEDs COB
----------------	------------

Luminous Flux	144LM (3000K)
---------------	---------------

Main Material	Aluminum
---------------	----------

Color Temperature	3000K / 4000K / 6500K
-------------------	-----------------------

CRI	≥90
-----	-----

Power Factor	≥0.8
--------------	------


Working Temperature	-10°C~45°C
---------------------	------------

Beam Angle (Optional)	25°
-----------------------	-----

Fixture Dimmable	Non-dimmable
------------------	--------------

Electrical	Internal Driver
------------	-----------------

Protection class	IP65
------------------	------

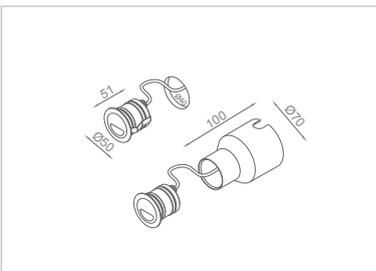

Especially designed for:

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.



Product Model No.	AP-BD-0137A-3W	
Packaging Detail	62×52×30cm	
	STD PKG	8pcs
	N.W	8.94kgs
	G.W	11.5kgs


AP-BD-0137A-3W

DC3-6V3W LED DC3000K/ PRI:140lm220-240/ incl.V~-50/60 Hz 0.030A

Driver SEC: Constant Current: DC600mA



Warm White 3000K ∠25°

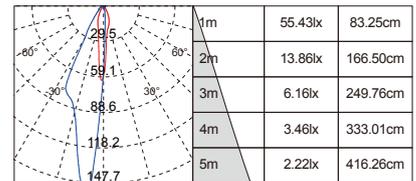

cd Height illuminance Diameter

Various Brand of COB LED Light Source:



Product series

# AP-BD-1410A-14W



LED WALL  
LAMP

TECHNICAL SPECIFICATIONS

Input (Optional)	220-240V~50/60 Hz
Maximum Wattage	14W±10% Max

Number of LEDs	2 LEDs COB
----------------	------------

Luminous Flux	440LM (3000K)
---------------	---------------

Main Material	Aluminum
---------------	----------

Color Temperature	3000K / 4000K / 6500K
-------------------	-----------------------

CRI	≥90
-----	-----

Power Factor	≥0.8
--------------	------


Working Temperature	-10°C~45°C
---------------------	------------

Beam Angle (Optional)	15°/24°/36°
-----------------------	-------------

Fixture Dimmable	Non-dimmable
------------------	--------------

Electrical	Internal Driver
------------	-----------------

Protection class	IP55
------------------	------

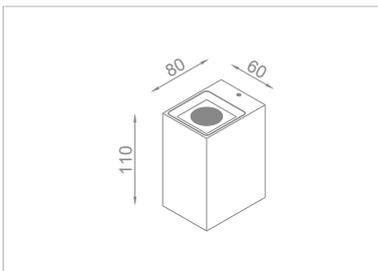


Product Model No.	AP-BD-1410A-14W	
Packaging Detail	27.5×27.5×25cm	
	STD PKG	12pcs
	N.W	10.8kgs
	G.W	12.8kgs

AP-BD-1410A-14W

14W220-240LEDV~3000K50/60440



Warm White 3000K ∠15°

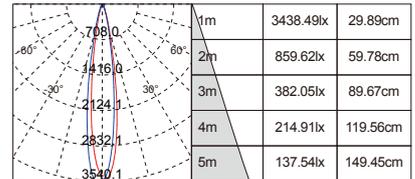

cd Height illuminance Diameter

Especially designed for:

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.



Various Brand of COB LED Light Source:



Product series

# AP-BD-1420A-10W



LED WALL  
LAMP

TECHNICAL SPECIFICATIONS

Input (Optional)	220-240V~50/60 Hz
Maximum Wattage	10W±10% Max

Number of LEDs	1 LEDs COB
----------------	------------

Luminous Flux	347LM (3000K)
---------------	---------------

Main Material	Aluminum & PC Lens Diffuser
---------------	-----------------------------

Color Temperature	3000K / 4000K / 6500K
-------------------	-----------------------

CRI	≥90
-----	-----

Power Factor	≥0.92
--------------	-------


Working Temperature	-10°C~45°C
---------------------	------------

Beam Angle (Optional)	110°
-----------------------	------

Fixture Dimmable	Non-dimmable
------------------	--------------

Electrical	Internal Driver
------------	-----------------

Protection class	IP55
------------------	------

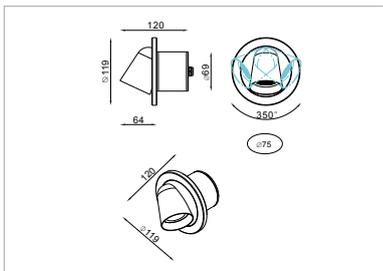


Product Model No.	AP-BD-1420A-10W	
Packaging Detail	50×33.5×39cm	
	STD PKG	12pcs
	N.W	7.2kgs
	G.W	9.2kgs

## AP-BD-1420A-10W

DC36V10W LEDDC3000K/ PRI: 347lm220-240/ incl.V~ 50/60-Hz 0.15A  
Driver SEC: Constant Current: DC250mA



Warm White 3000K ∠110°

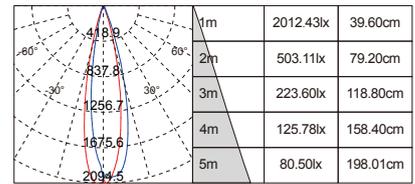

cd Height illuminance Diameter

Especially designed for:

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.



Various Brand of COB LED Light Source:



Product series

**AP-BD-1441A-10W**



LED WALL  
LAMP

TECHNICAL SPECIFICATIONS

Input (Optional)	220-240V~50/60 Hz
Maximum Wattage	10W±10% Max

Number of LEDs	1 LEDs COB
----------------	------------

Luminous Flux	623LM (3000K)
---------------	---------------

Main Material	Aluminum
---------------	----------

Color Temperature	3000K / 4000K / 6500K
-------------------	-----------------------

CRI	≥90
-----	-----

Power Factor	≥0.8
--------------	------


Working Temperature	-10°C~45°C
---------------------	------------

Beam Angle (Optional)	110°
-----------------------	------

Fixture Dimmable	Non-dimmable
------------------	--------------

Electrical	Internal Driver
------------	-----------------

Protection class	IP20
------------------	------

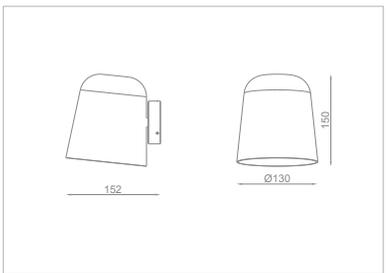

Especially designed for:

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.




Product Model No.	AP-BD-1441A-10W	
Packaging Detail	39×38.5×37cm	
	STD PKG	8pcs
	N.W	4.4kgs
	G.W	6.44kgs

AP-BD-1441A-10W

DC28-42V10W LED 3000KDC / PRI:623lm220-240/ incl. V~50/60 Hz 0.15A  
Driver SEC: Constant Current: DC250mA



Warm White 3000K ∠110°

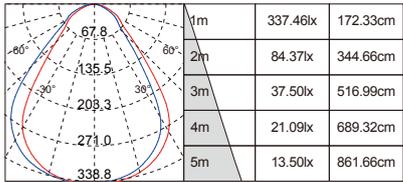

cd Height illuminance Diameter

Option colors



Various Brand of COB LED Light Source:



Product series

# AP-BD-1440A-10W



LED WALL  
LAMP

TECHNICAL SPECIFICATIONS

Input (Optional)	220-240V~50/60 Hz
Maximum Wattage	10W±10% Max


Number of LEDs	1 LEDs COB
----------------	------------

Luminous Flux	623LM (3000K)
---------------	---------------

Main Material	Aluminum
---------------	----------

Color Temperature	3000K / 4000K / 6500K
-------------------	-----------------------

CRI	≥90
Power Factor	≥0.8
Working Temperature	-10°C~45°C
Beam Angle (Optional)	110°
Fixture Dimmable	Non-dimmable
Electrical	Internal Driver
Protection class	IP20

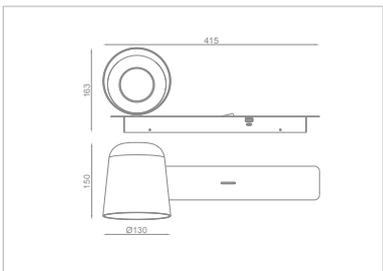

Especially designed for:

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.




Product Model No.	AP-BD-1441A-10W	
Packaging Detail	84×49×43cm	
	STD PKG	8pcs
	N.W	4.6kgs
	G.W	6.6kgs

AP-BD-1441A-10W

DC28-42V10W LED 3000KDC / PRI:623lm220-240/ incl. V~50/60 Hz 0.15A  
Driver SEC: Constant Current: DC250mA



Warm White 3000K ∠110°

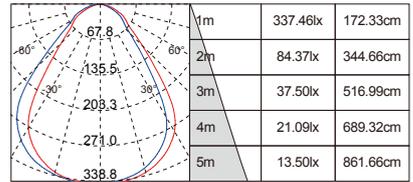

cd Height illuminance Diameter

Option colors



Various Brand of COB LED Light Source:



LED WALL  
LAMP

TECHNICAL SPECIFICATIONS

Input (Optional)	220-240V~50/60 Hz
Maximum Wattage	10W±10% Max


Number of LEDs	1 LEDs COB
----------------	------------

Luminous Flux	623LM (3000K)
---------------	---------------

Main Material	Aluminum
---------------	----------

Color Temperature	3000K / 4000K / 6500K
-------------------	-----------------------

CRI	≥90
Power Factor	≥0.8
Working Temperature	-10°C~45°C
Beam Angle (Optional)	110°
Fixture Dimmable	Non-dimmable
Electrical	Internal Driver
Protection class	IP20

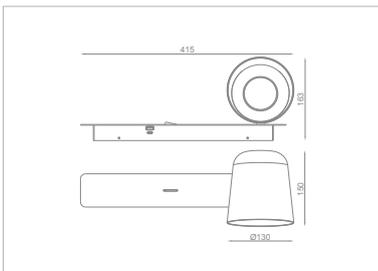

Especially designed for:

Homes, living rooms, bedrooms, hallways, hotels, apartments, libraries, exhibition halls, museums, stations, hospitals, clothing stores, jewelry stores, cafes, shopping malls, showrooms, office space, banks, opera houses, cinemas, showcases, etc.




Product Model No.	AP-BD-1442A-10W	
Packaging Detail	84×49×43cm	
	STD PKG	8pcs
	N.W	4.6kgs
	G.W	6.6kgs

AP-BD-1442A-10W

DC28-42V10W LED 3000KDC / PRI:623lm220-240/ incl. V~50/60 Hz 0.15A  
Driver SEC: Constant Current: DC250mA



Warm White 3000K ∠110°

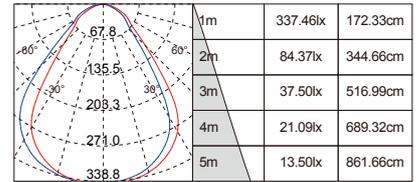

cd Height illuminance Diameter

Option colors



Various Brand of COB LED Light Source:

