

27W LED Fountain

► FEATURES

- High efficiency light source, Cree & Edison 3W high power led.
- High quality Stainless steel 316 lamp fixture/lamp, Beautiful appearance and reasonable waterproof structure.
- Tempered glass as cover, heat-resisting and impact resistance.
- Supplied with 1m 3wires/5wires VDE rubber cable or UL rubber cable.
- Long life, up to 45,000 hours.
- Waterproof IP68, outdoor use.
- Beam angle 8-90°.





► OPTIONS ON REQUEST

- Cable lengths can be supplied according to your requirements
- Beam angle 8° 15° 30° 45° 60° 90° for optional
- Working voltage AC12V, DC12V, DC24V is available.
- 316L or 316Ti is optional
- RDM, DMX512 (3 channel), DMX512 (4 channel), Auto change color can be optional.

► SPECIFICATION

Body size	D160 x H36mm
Output Power	27W
Luminous Flux Output	80-90LM/W
Rendering Index	Ra>70
Lens surface	Mirrored, Frosting, Beaded, Striped
Light source	EDISON or CREE
IP Grade	IP68
Housing material	Stainless steel 316
Cable gland	PG13.5, Stainless steel 316
Control Mode	Auto color change / DMX512 controllable

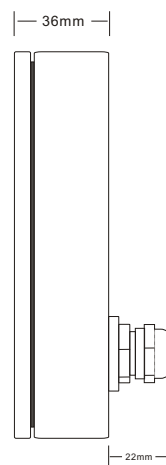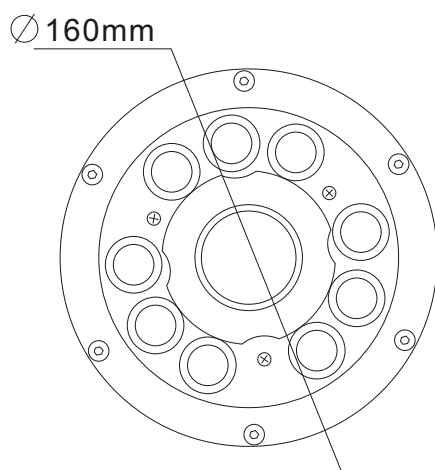

Order information

Item code	Lamps	Color	Controller Mode	Line Way	Working Voltage
093.01	9pcs 3W LED	2700-3000K	/	V+/V-	AC12V DC12V DC24V
093.02	9pcs 3W LED	4000-4500K	/	V+/V-	AC12V DC12V DC24V
093.03	9pcs 3W LED	5000-5500K	/	V+/V-	AC12V DC12V DC24V
093.04	9pcs 3W LED	6000-6500K	/	V+/V-	AC12V DC12V DC24V
093.05	9pcs 3W LED	Red	/	V+/V-	AC12V DC12V DC24V
093.06	9pcs 3W LED	Green	/	V+/V-	AC12V DC12V DC24V
093.07	9pcs 3W LED	Blue	/	V+/V-	AC12V DC12V DC24V
093.08	9pcs 3W LED	Yellow	/	V+/V-	AC12V DC12V DC24V
093.09	9pcs 3W LED (3R+3G+3B)	RGB	DMX512 (3 channel)	V+/V-/D+/D-	AC12V DC12V DC24V
093.10	9pcs 3W LED (3R+3G+3B)	RGB	Auto control	V+/V-	AC12V DC12V DC24V
093.11	9pcs 3W LED (3R+3G+3B)	RGB	External No driver inside	R/G/B/V+	DC12V DC24V
093.12	9pcs 3W LED (3R+3G+3B)	RGB	External Build-in current-limiting circuit	R/G/B/V+	DC12V DC24V

Accessories

**93023**

T type IP68 quick connector suitable for 6.8-10mm Ø cables max. 3 x 2.5mm² or 5 x 2.5mm²

**93024**

IP68 quick connector suitable for 6.8-10mm Ø cables max. 3 x 2.5mm²

**93025**

IP68 quick connector suitable for 6.8-10mm Ø cables max. 5 x 2.5mm²

**IP23 Switch Power Supply**

Will be choosed according to the light quantity and cable length.

**IP68 Switch Power Supply**

Will be choosed according to the light quantity and cable length.

**8612**

DMX512 CONTROLLER
Model No. : DMX500

**8605**

2.4G wireless DMX/RDM signal converter
Model No.: DSC-24

**8608**

DMX512 decoder (constant current)
Model No.: DCC-03

**8609**

DMX512 decoder (constant voltage)
Model No.: DCV-03

**8604**



12 way DMX/RDM signal amplifier and power splitter
Model No.: DSP-12

**8606**

DMX/RDM signal amplifier
Model No.: DSA-01


**8607**

IP68 DMX/RDM signal amplifier
Model No.: DSA-01P

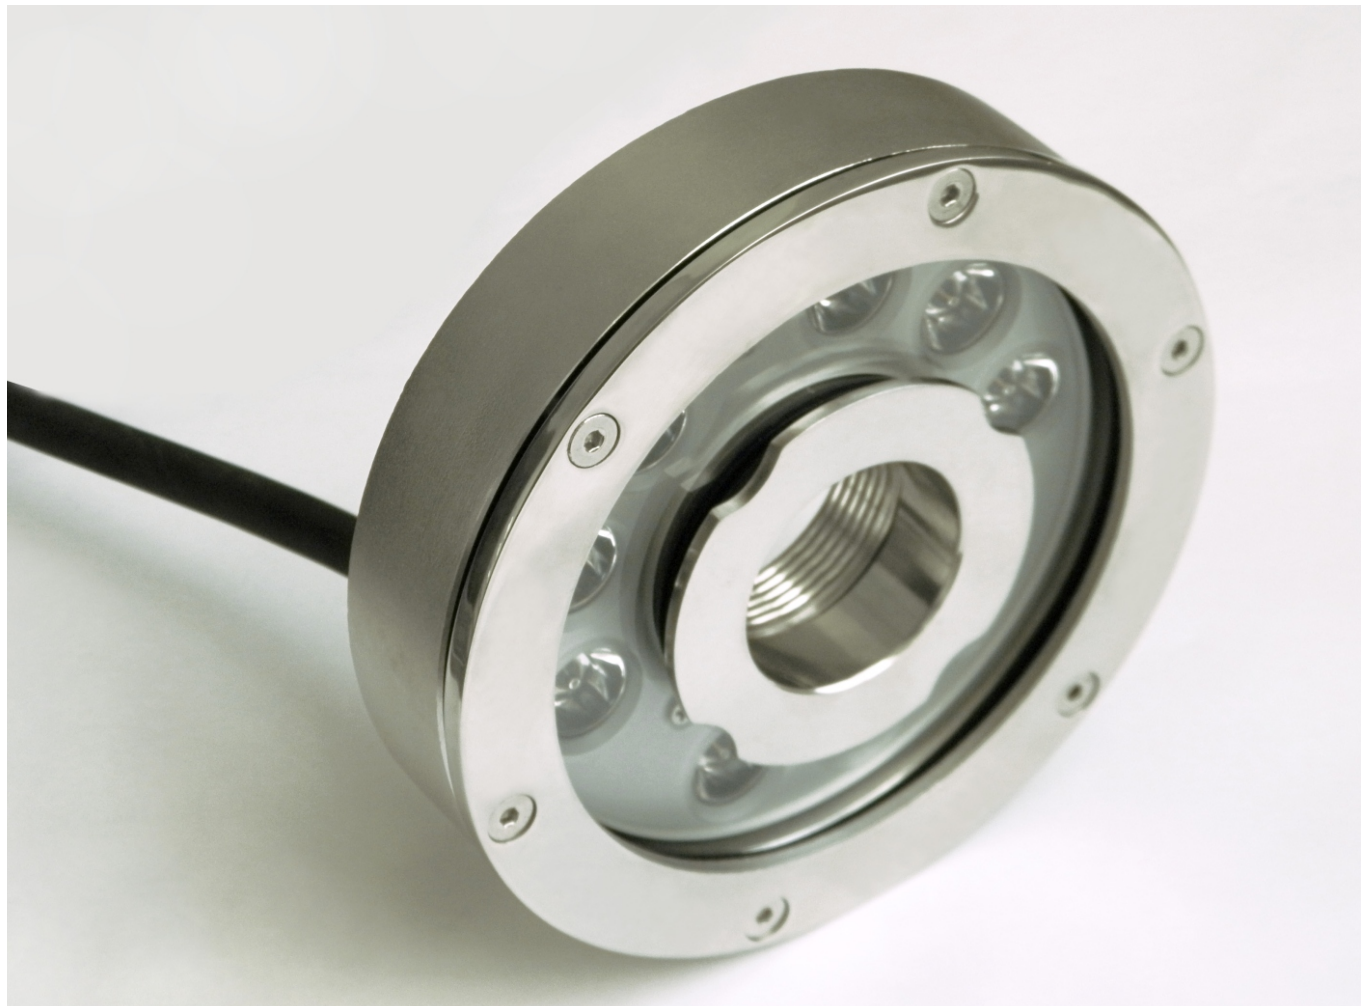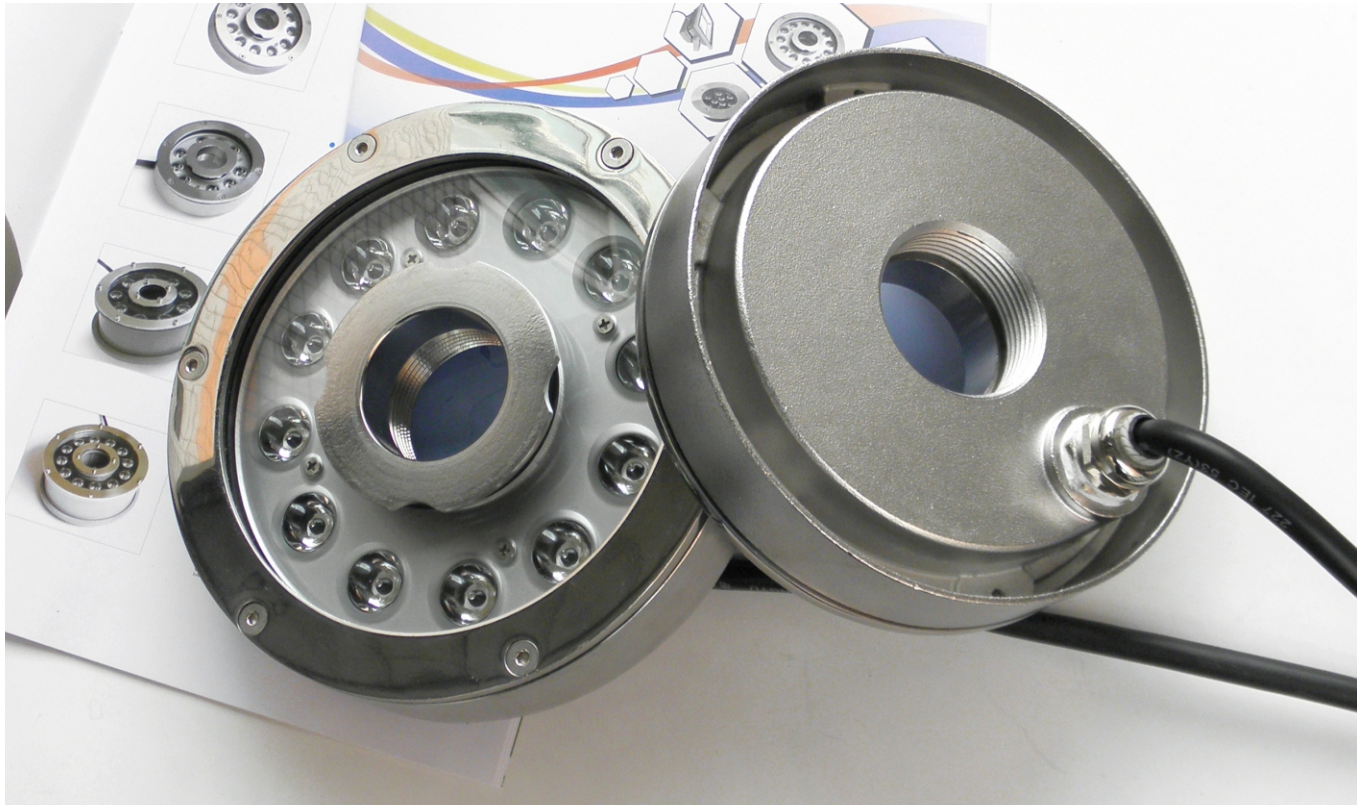


27W LED Fountain


Wiring Diagram (1)

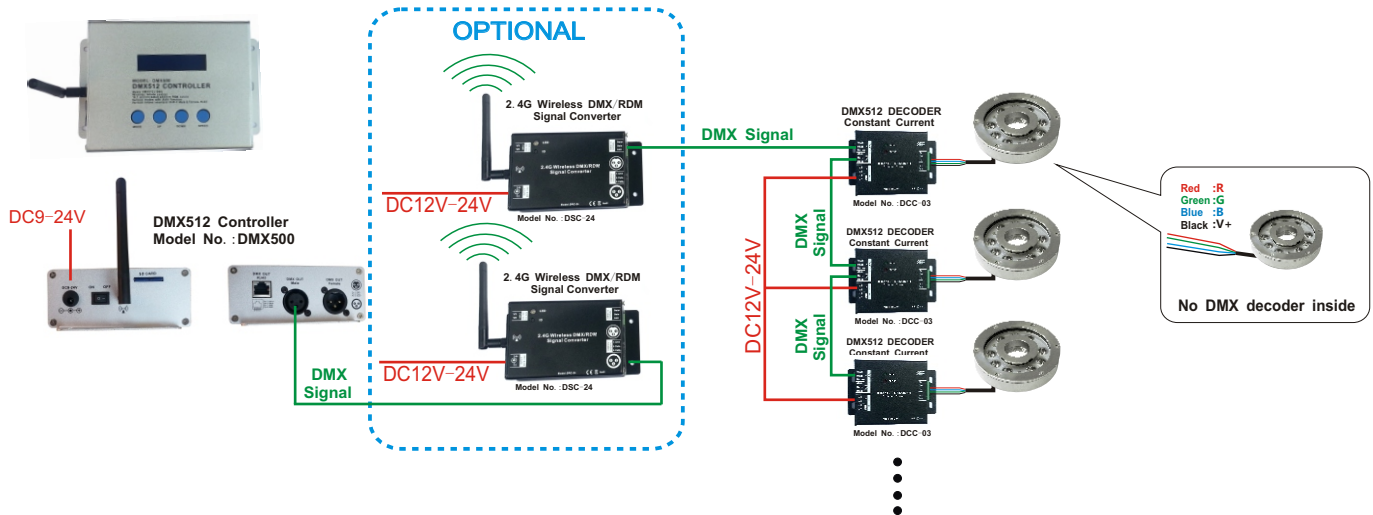


Wiring Diagram (2)

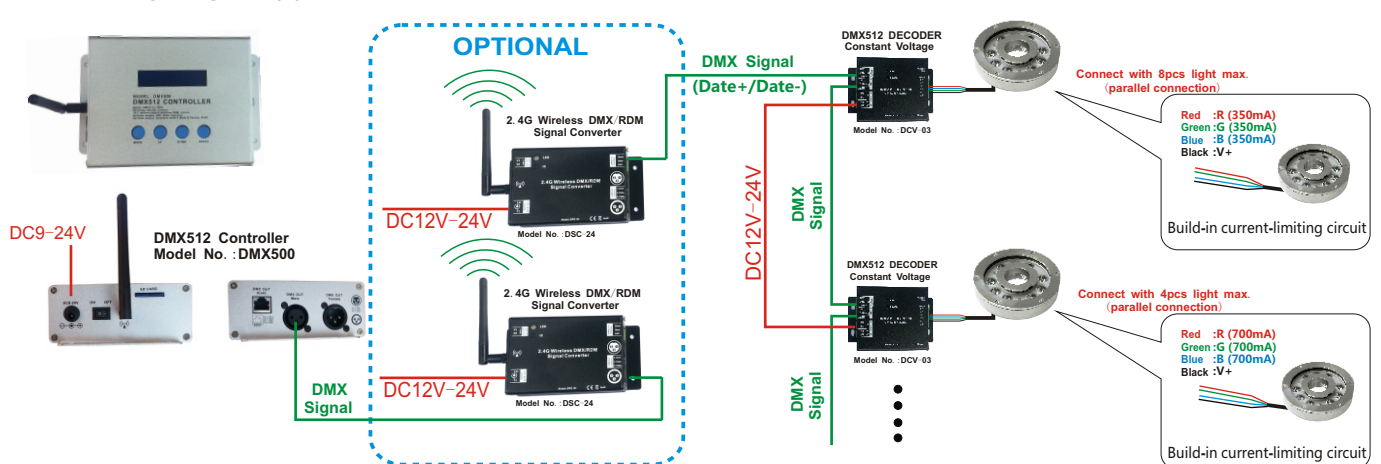

Wiring Diagram (3)

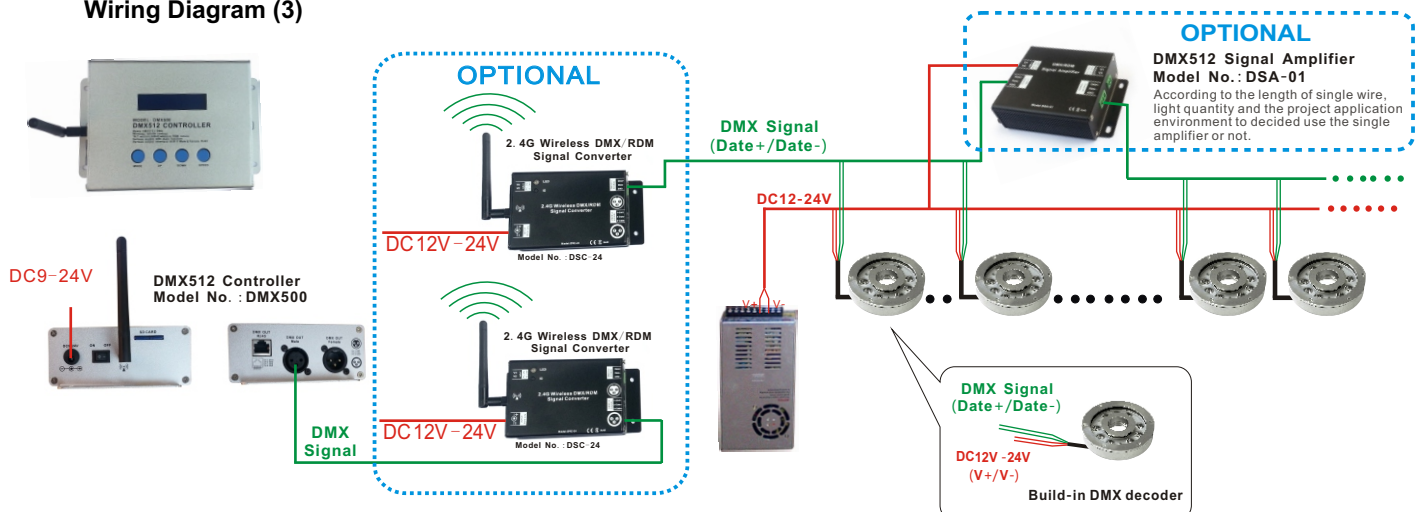

Wiring Diagram (4)

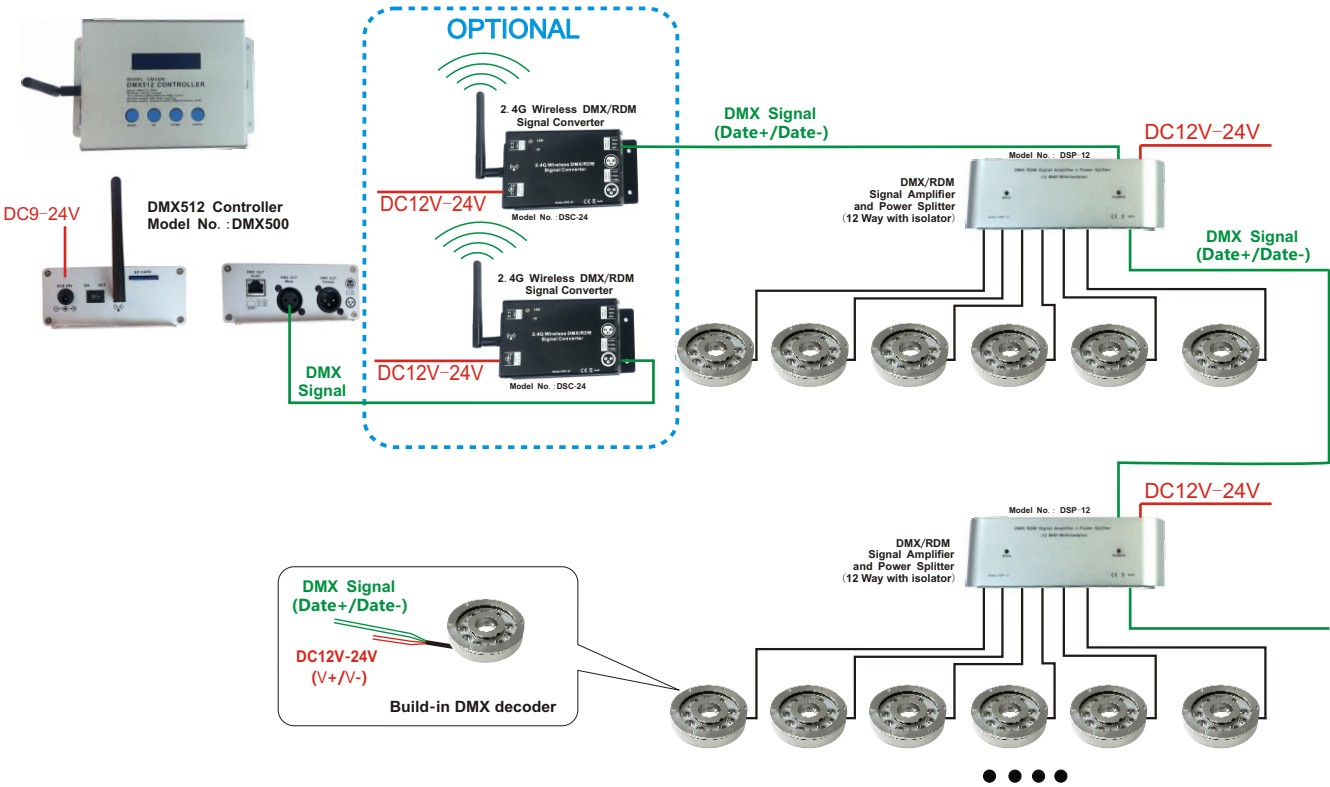

Wiring Diagram (5)

