


AT-1013



Description

Extruded Aluminum pole

Double photometric diffuser technology

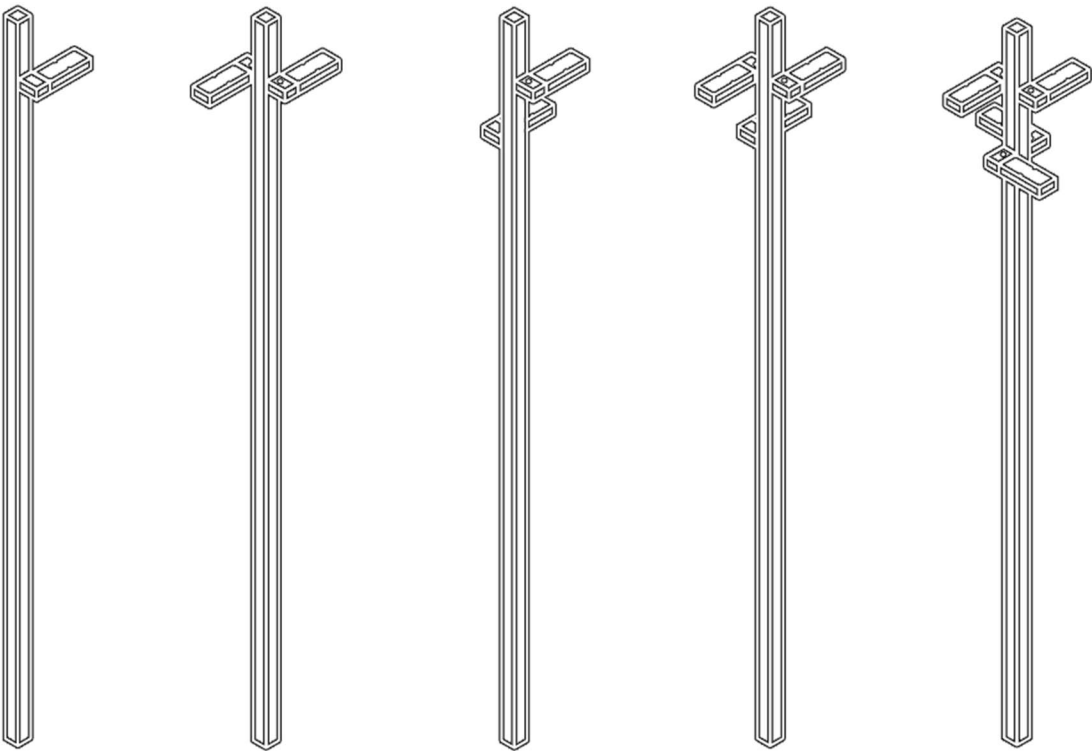

Technology Data


Cord	Each Lamp Power	Poles high	Poles materials	Angle
AT-1013 (30-100)	30-100W	3-6m	Extruded Aluminum	5/30/60/90/120/60*150°

AT-1014






Description

Product description:
Die cast aluminum housing
Sealed lamp housing
Double photometric diffuser technology
Equipped with NEMA socket



Light Distribution Curve



Technology Data

Cord	Power	Voltage	N.W (kg)	G.W (kg)	size (mm)
AT-1014 (30)	30W	100-277	4.5	5.2	300*300*511
AT-1014 (40)	40W	100-277			
AT-1014 (60)	60W	100-277			

AT-1015

Description



Product description:

Die cast aluminum housing




Sealed lamp housing

Double photometric diffuser technology

Equipped with NEMA socket

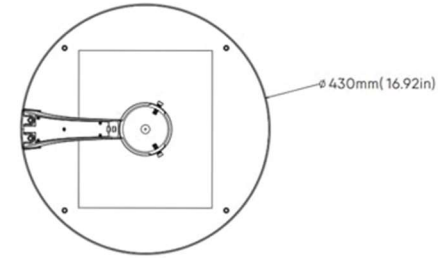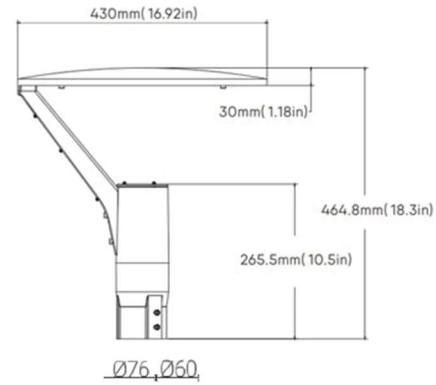

Light Distribution Curve

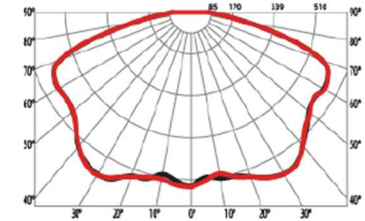

Technology Data

Cord	Power	Voltage	N.W (kg)	G.W (kg)	size (mm)
AT-1015 (30)	30W	100-277	9.5	10.2	430*430*464
AT-1015 (40)	40W	100-277			
AT-1015 (60)	60W	100-277			
AT-1015 (80)	80W	100-277			


AT-1016




Description

Product description:

- Die cast aluminum housing
- Optical grade PMMA lamp shades
- Sealed lamp housing
- Double photometric diffuser technology
- Equipped with NEMA socket

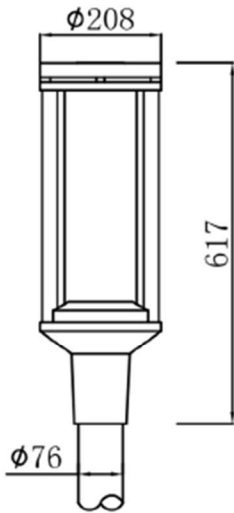

Light Distribution Curve

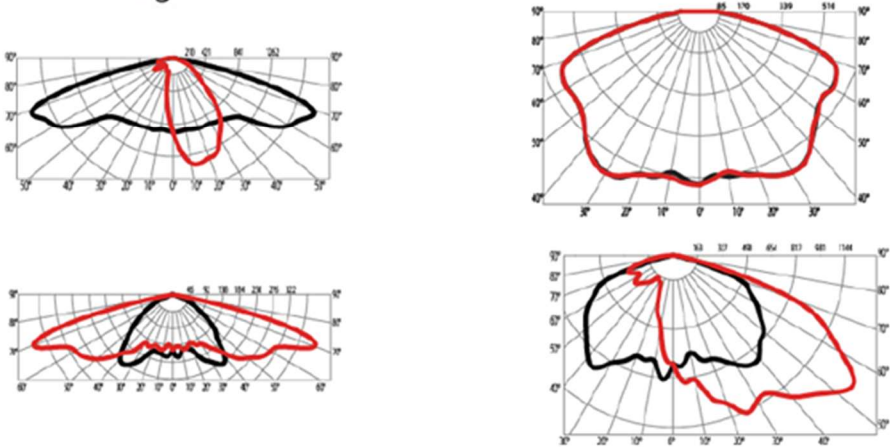

Technology Data

Cord	Power	Voltage	N.W (kg)	G.W (kg)	Packing size (mm)
AT-1016 (20)	20W	100-277	4.9	5.9	208*208*663
AT-1016 (30)	30W	100-277			
AT-1016 (40)	40W	100-277			
AT-1016 (50)	50W	100-277			
AT-1016 (60)	60W	100-277			

AT-1017



Description

Product description:


Die cast aluminum housing

Optical grade PMMA lamp shades





Sealed lamp housing

Double photometric diffuser technology

Equipped with NEMA socket

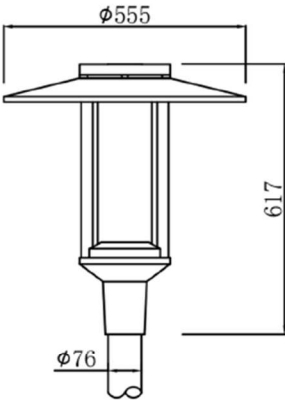

Light Distribution Curve

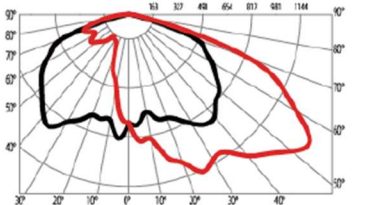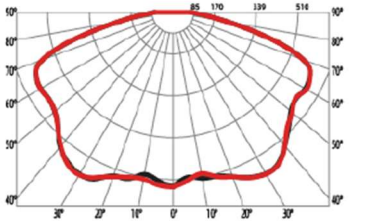

Technology Data



Cord	Power	Voltage	N.W (kg)	G.W (kg)	Packing size (mm)
AT-1017 (20)	20W	100-277	6.9	7.9	550*550*663
AT-1017 (30)	30W	100-277			
AT-1017 (40)	40W	100-277			
AT-1017 (50)	50W	100-277			
AT-1017 (60)	60W	100-277			

AT-1018A



Description

Product description:

- Die cast aluminum housing
- Optical grade PMMA lamp shades
- Sealed lamp housing
- Double photometric diffuser technology
- Equipped with NEMA socket



Light Distribution Curve

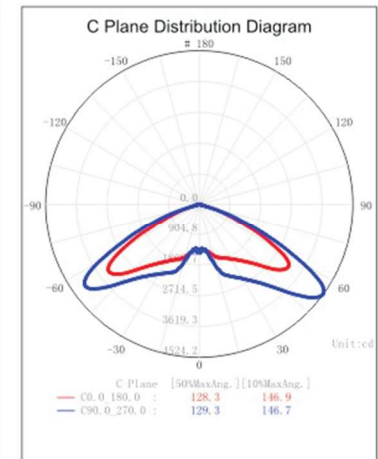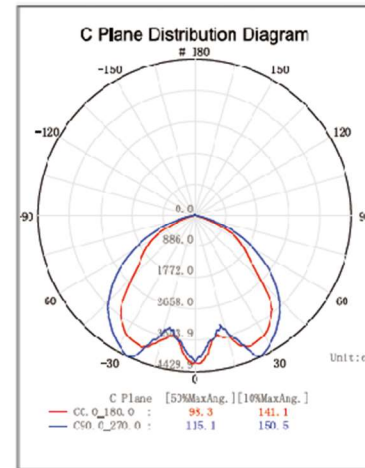

Technology Data

Cord	Power	Voltage	N.W (kg)	G.W (kg)	Packing size (mm)
AT-1018A (30)	30W	100-277	7.5	8.7	635*535*150
AT-1018A (40)	40W	100-277			
AT-1018A (60)	60W	100-277			
AT-1018A (80)	80W	100-277			
AT-1018A (100)	100W	100-277			


AT-1018B




Description

Product description:

- Die cast aluminum housing
- Optical grade PMMA lamp shades
- Sealed lamp housing
- Double photometric diffuser technology
- Equipped with NEMA socket

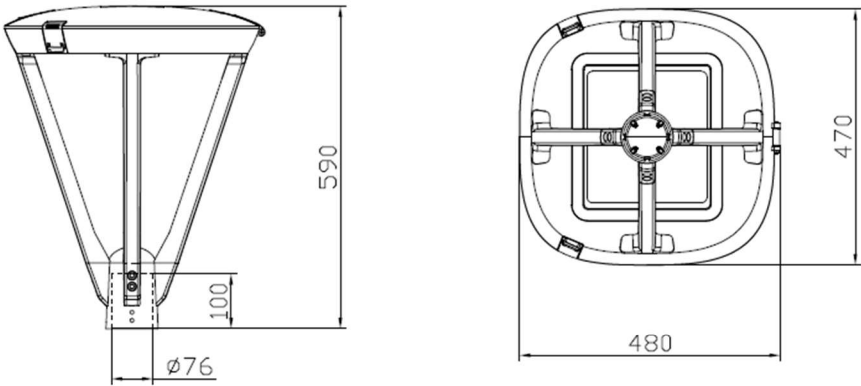

Light Distribution Curve

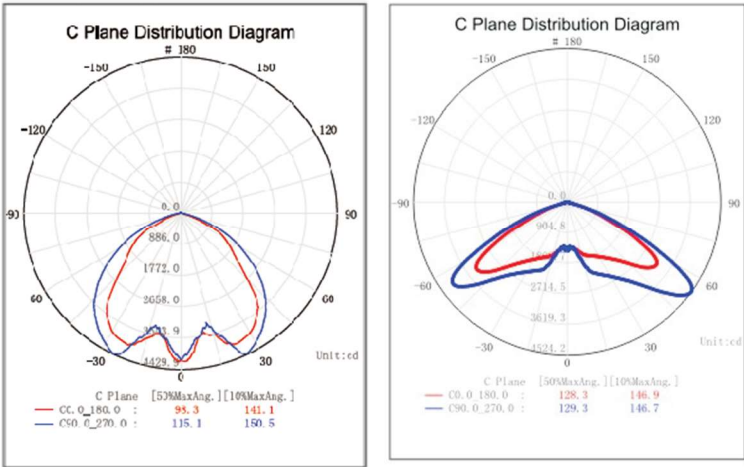

Technology Data



Cord	Power	Voltage	N.W (kg)	G.W (kg)	Packing size (mm)
AT-1018B (30)	30W	100-277	7.5	8.7	635*535*150
AT-1018B (40)	40W	100-277			
AT-1018B (60)	60W	100-277			
AT-1018B (80)	80W	100-277			
AT-1018B (100)	100W	100-277			

AT-1018C



Description

Product description:

- Die cast aluminum housing
- Optical grade PMMA lamp shades
- Sealed lamp housing
- Double photometric diffuser technology
- Equipped with NEMA socket



Light Distribution Curve

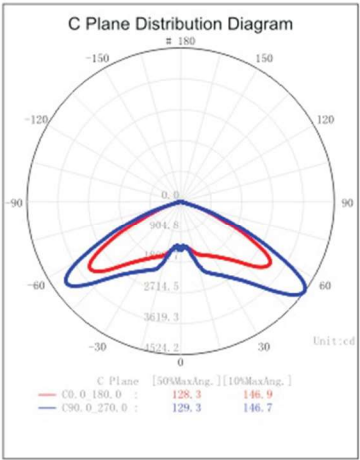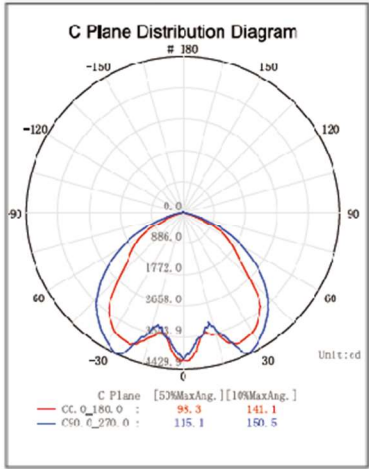

Technology Data

Cord	Power	Voltage	N.W (kg)	G.W (kg)	Packing size (mm)
AT-1018C (30)	30W	100-277	6.7	7.9	635*535*150
AT-1018C (40)	40W	100-277			
AT-1018C (60)	60W	100-277			
AT-1018C (80)	80W	100-277			
AT-1018C (100)	100W	100-277			

AT-1018D



Description

Product description:



Die cast aluminum housing

Optical grade PMMA lamp shades



Sealed lamp housing

Double photometric diffuser technology

Equipped with NEMA socket

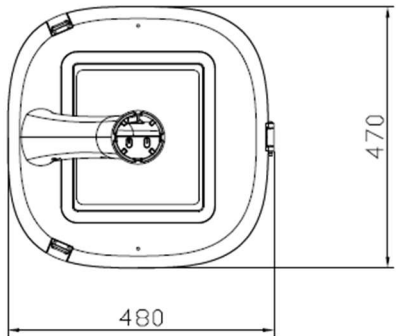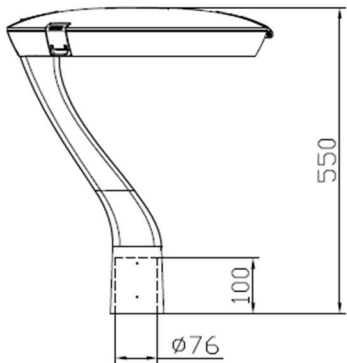

Light Distribution Curve

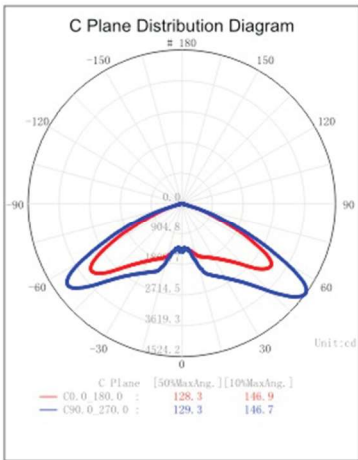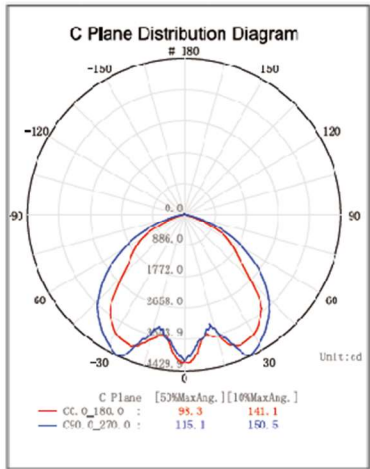


Technology Data

Cord	Power	Voltage	N.W (kg)	G.W (kg)	Packing size (mm)
AT-1018D (30)	30W	100-277	7.9	9.1	635*535*150
AT-1018D (40)	40W	100-277			
AT-1018D (60)	60W	100-277			
AT-1018D (80)	80W	100-277			
AT-1018D (100)	100W	100-277			


AT-1018E

Description

Product description:
Die cast aluminum housing
Optical grade PMMA lamp shades
Sealed lamp housing
Double photometric diffuser technology
Equipped with NEMA socket

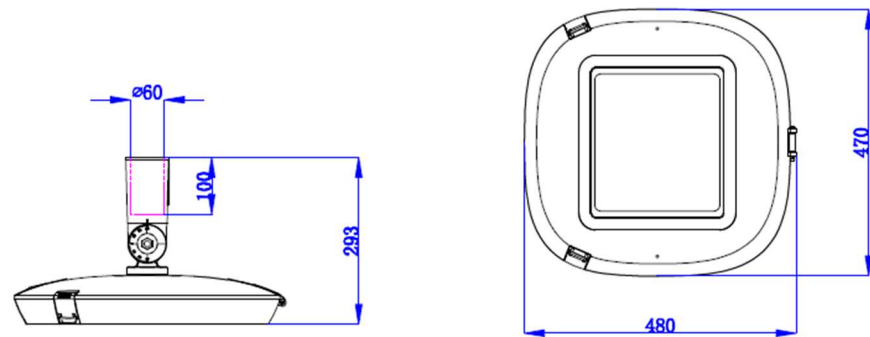

Light Distribution Curve

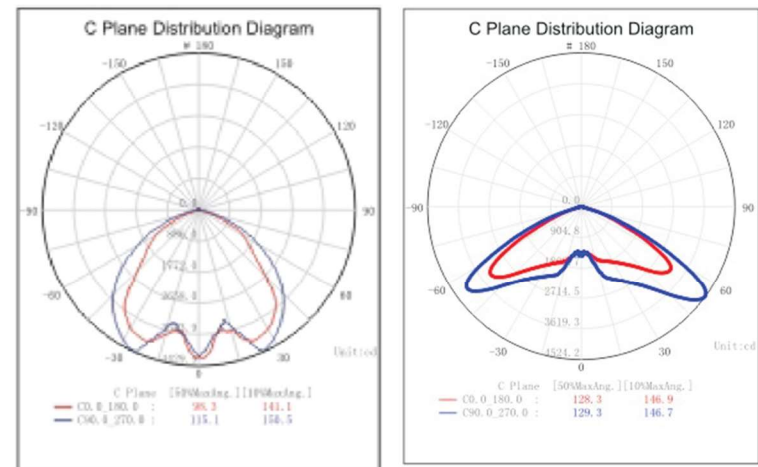

Technology Data


Cord	Power	Voltage	N.W (kg)	G.W (kg)	Packing size (mm)
AT-1018E (30)	30W	100-277	6.9	7.9	635*535*150
AT-1018E (40)	40W	100-277			
AT-1018E (60)	60W	100-277			
AT-1018E (80)	80W	100-277			
AT-1018E (100)	100W	100-277			

AT-1018F


Description

Product description:

- Die cast aluminum housing
- Optical grade PMMA lamp shades
- Sealed lamp housing
- Double photometric diffuser technology
- Equipped with NEMA socket

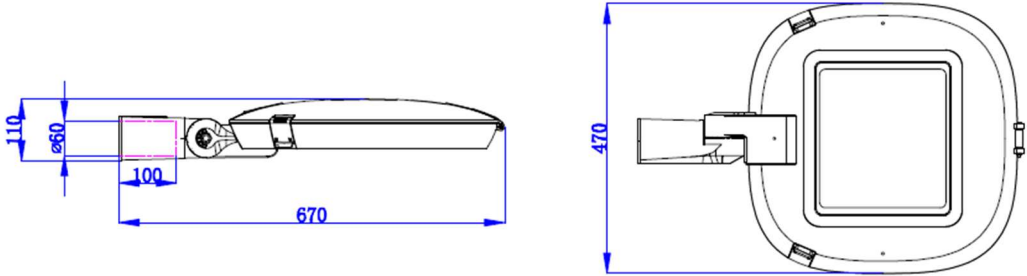

Light Distribution Curve

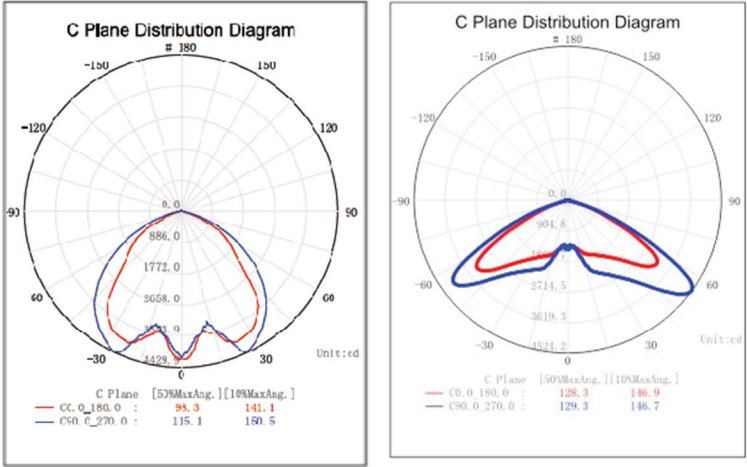

Technology Data

Cord	Power	Voltage	N.W (kg)	G.W (kg)	Packing size (mm)
AT-1018F (30)	30W	100-277	6.9	7.9	635*535*150
AT-1018F (40)	40W	100-277			
AT-1018F (60)	60W	100-277			
AT-1018F (80)	80W	100-277			
AT-1018F (100)	100W	100-277			

AT-1018G

Description

Product description:



Die cast aluminum housing

Optical grade PMMA lamp shades



Sealed lamp housing

Double photometric diffuser technology

Equipped with NEMA socket

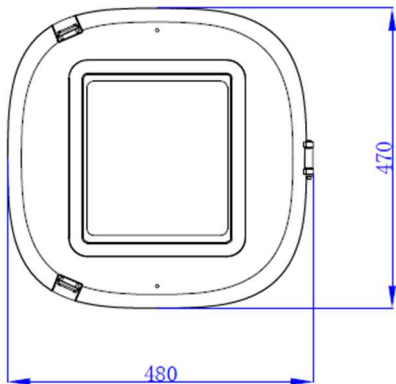

Light Distribution Curve

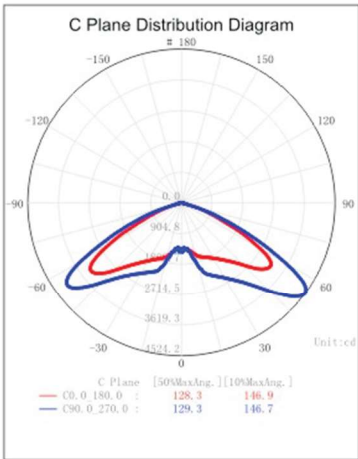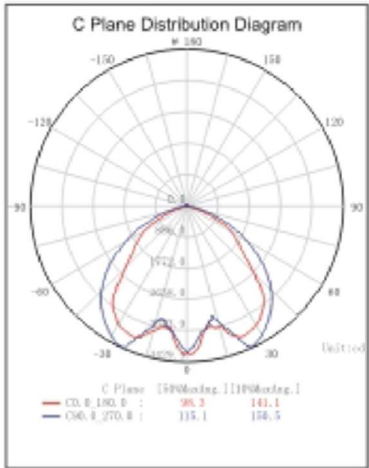

Technology Data


Cord	Power	Voltage	N.W (kg)	G.W (kg)	Packing size (mm)
AT-1018G (30)	30W	100-277	6.9	7.9	635*535*150
AT-1018G (40)	40W	100-277			
AT-1018G (60)	60W	100-277			
AT-1018G (80)	80W	100-277			
AT-1018G (100)	100W	100-277			

AT-1019


Description

Product description:

- Die cast aluminum housing
- Optical grade PMMA lamp shades
- Sealed lamp housing
- Double photometric diffuser technology
- Equipped with NEMA socket

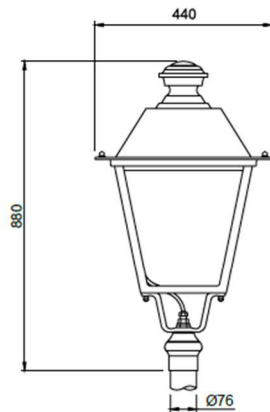

Optical Application

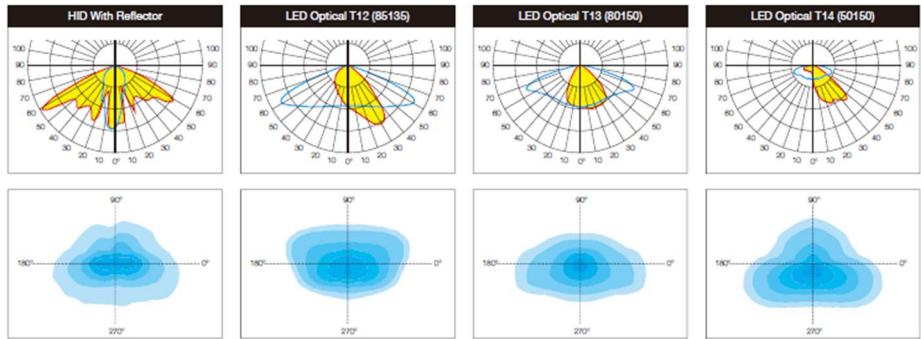

Technology Data


Cord	Power	Voltage	N.W (kg)	G.W (kg)	Packing size (mm)
AT-1019 (20)	20W	100-277	11.4	12.6	425 * 425 * 743
AT-1019 (30)	30W	100-277			
AT-1019 (40)	40W	100-277			
AT-1019 (50)	50W	100-277			
AT-1019 (60)	60W	100-277			

AT-1021

Description

Product description:

- Die cast aluminum housing
- Optical grade PMMA lamp shades
- Sealed lamp housing
- Double photometric diffuser technology
- Equipped with NEMA socket

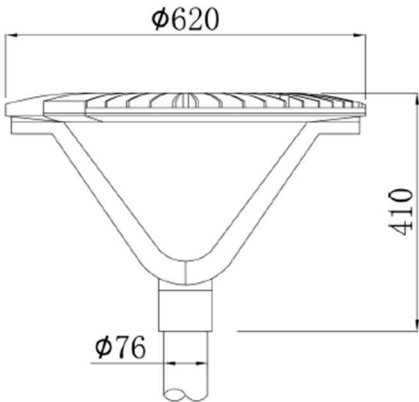

Technology Data

Cord	Power	Voltage	N.W (kg)	G.W (kg)	Packing size (mm)
AT-1021 (20)	20W	100-277	8.5	9.5	650 * 650 * 450
AT-1021 (30)	30W	100-277			
AT-1021 (40)	40W	100-277			
AT-1021 (50)	50W	100-277			
AT-1021 (60)	60W	100-277			

AT-1022

Description

Product description:


Die cast aluminum housing

Tempered glass mask


Sealed lamp housing

Double photometric diffuser technology

Equipped with NEMA socket

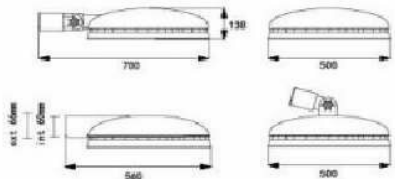

Optical Application

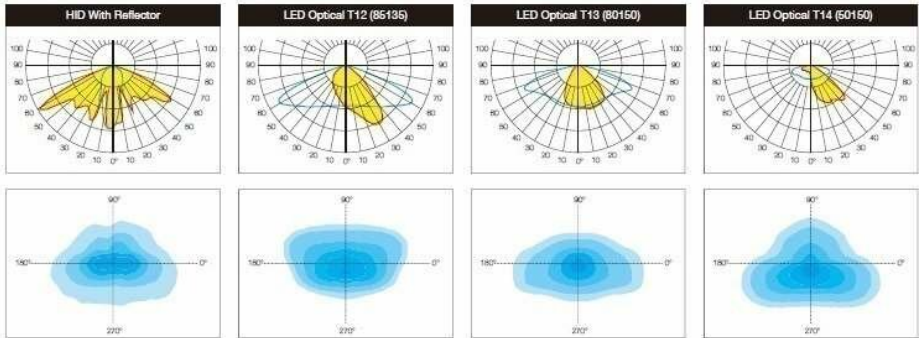

100V-277V
50-60Hz

>50000 h

Technology Data


Cord	Power	Voltage	N.W (kg)	G.W (kg)	Packing size (mm)
AT-1022 (30)	30W	100-277	10.4	11.6	560 * 560 * 230
AT-1022 (60)	60W	100-277			
AT-1022 (90)	90W	100-277			
AT-1022 (120)	120W	100-277			

AT-1023

Description

Product description:

- Die cast aluminum housing
- Optical grade PMMA lamp shades
- Sealed lamp housing
- Double photometric diffuser technology
- Equipped with NEMA socket

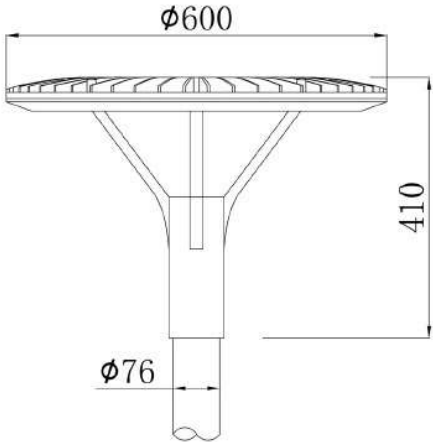

Technology Data

Cord	Power	Voltage	N.W (kg)	G.W (kg)	Packing size (mm)
AT-1023 (30)	30W	100-277	7.4	8.6	660*660*460
AT-1023 (40)	40W	100-277			
AT-1023 (50)	50W	100-277			
AT-1023 (60)	60W	100-277			

AT-1024




Description


Product description:
Die cast aluminum housing
Optical grade PMMA lamp shades
Sealed lamp housing
Double photometric diffuser technology
Equipped with NEMA socket



Optical Application

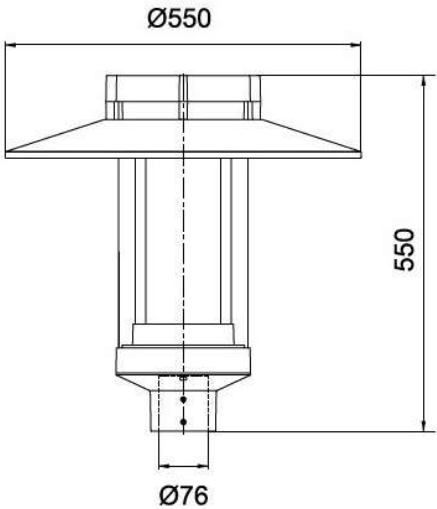

Type

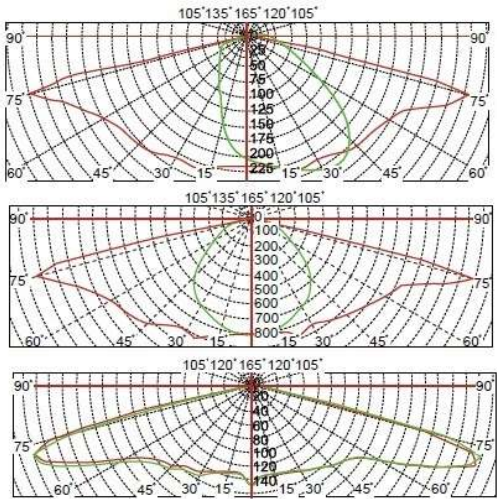


Technology Data

Cord	Power	Voltage	N.W (kg)	G.W (kg)	Packing size (mm)
AT-1024 (20)	20W	100-277	6.8	7.8	580*265*265
AT-1024 (30)	30W	100-277			
AT-1024 (40)	40W	100-277			
AT-1024 (60)	60W	100-277			



AT-1025

Description

Product description:
Die cast aluminum housing
Optical grade PMMA lamp shades
Sealed lamp housing
Double photometric diffuser technology
Equipped with NEMA socket

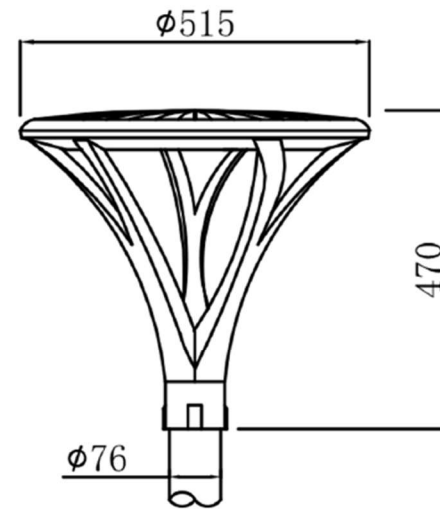

Light Distribution Curve

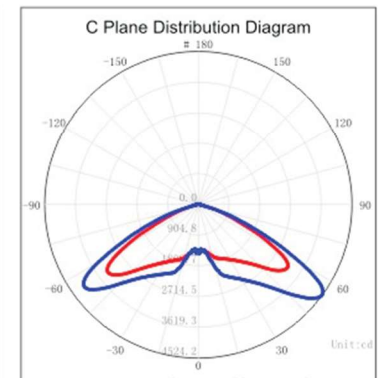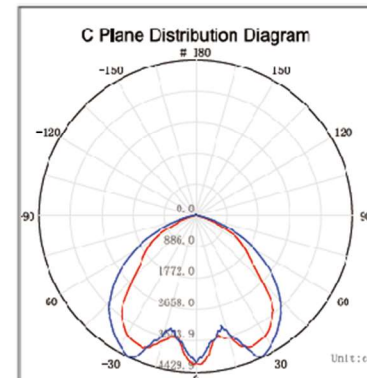


Cord	Power	Voltage	N.W (kg)	G.W (kg)	Size (mm)
AT-1025 (30)	30W	100-277	9.7	10.7	515*515*470
AT-1025 (40)	40W	100-277			
AT-1025 (60)	60W	100-277			
AT-1025 (80)	80W	100-277			

AT-1026




Description

Product description:
Die cast aluminum housing
Double photometric diffuser technology
PC diffusion technology
Sealed lamp housing

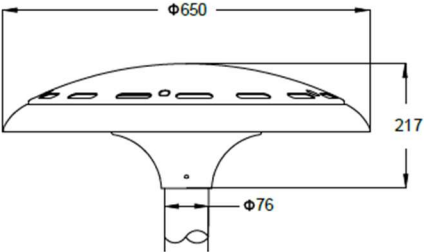

Optical Application

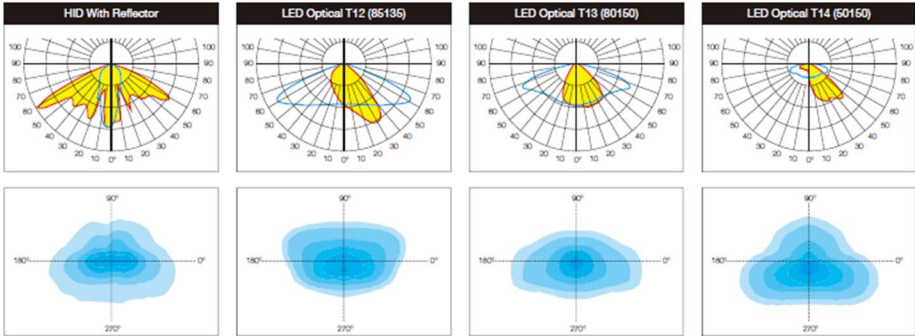

Technology Data


Cord	Power	Voltage	N.W (kg)	G.W (kg)	Packing size (mm)
AT-1026 (45)	45W	100-277	9.5	10.5	710*285*725
AT-1026 (60)	60W	100-277			

AT-1028




Description

Product description:
Die cast aluminum housing
Optical grade PMMA lamp shades
Sealed lamp housing
Double photometric diffuser technology
Equipped with NEMA socket

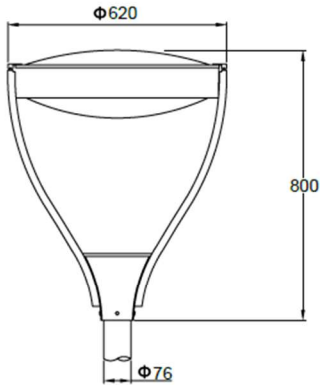

Optical Application

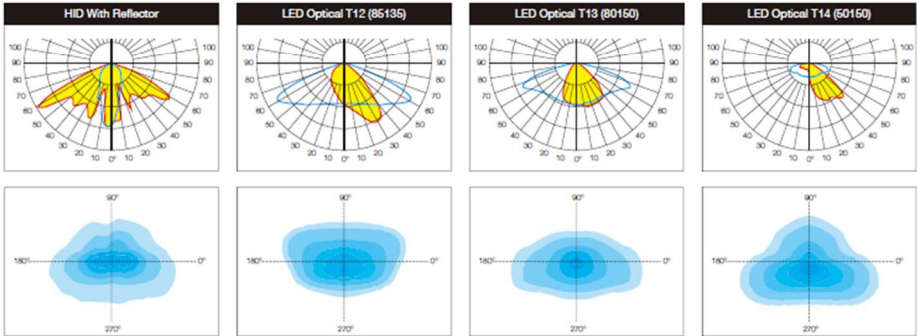




Technology Data

Cord	Power	Voltage	N.W (kg)	G.W (kg)	Packing size (mm)
AT-1028 (20)	20W	100-277	12.0	13.4	620 * 620 * 800
AT-1028 (30)	30W	100-277			
AT-1028 (40)	40W	100-277			
AT-1028 (50)	50W	100-277			
AT-1028 (60)	60W	100-277			

AT-1029

Description

Product description:
whole body Die cast aluminum housing
Double photometric diffuser technology
Supper white toughened glass
Sealed lamp housing

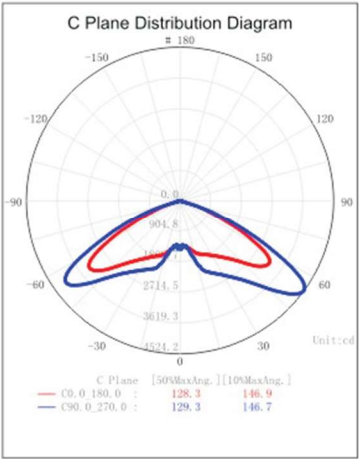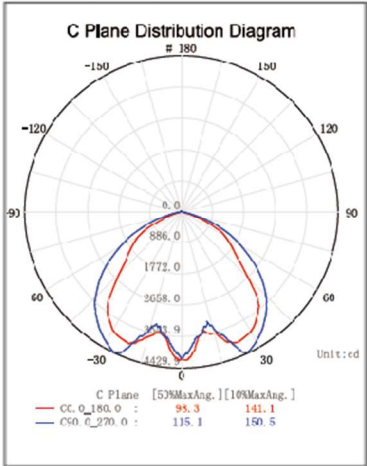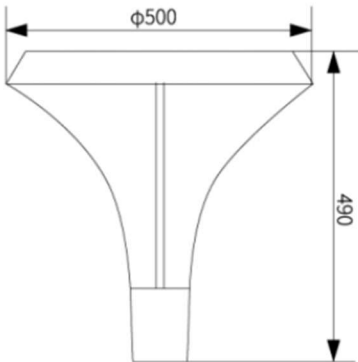

Technology Data

Cord	Power	Voltage	N.W (kg)	G.W (kg)	size (mm)
AT-1029 (30)	30W	100-277	5.5	6.2	500*500*490
AT-1029 (40)	40W	100-277			
AT-1029 (60)	60W	100-277			

AT-1030



Description


Product description:

Die cast aluminum housing, Aluminum sheet rotating cover


Double photometric diffuser technology

Supper white toughened glass

Sealed lamp housing

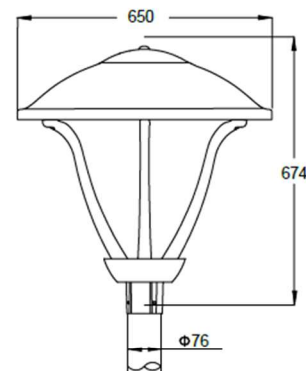

Optical Application

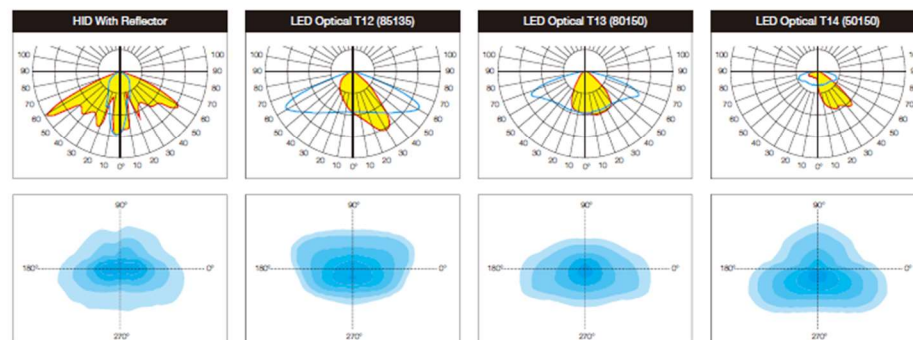

Technology Data


Cord	Power	Voltage	N.W (kg)	G.W (kg)	Packing size (mm)
AT-1030 (20)	20W	100-277	10.2	12.5	650 * 650 * 674
AT-1030 (30)	30W	100-277			
AT-1030 (40)	40W	100-277			
AT-1030 (50)	50W	100-277			
AT-1030 (60)	60W	100-277			

AT-1031




Description

Product description:
Die cast aluminum housing
Optical grade PMMA lamp shades
Sealed lamp housing
Double photometric diffuser technology
Equipped with NEMA socket




Optical Application

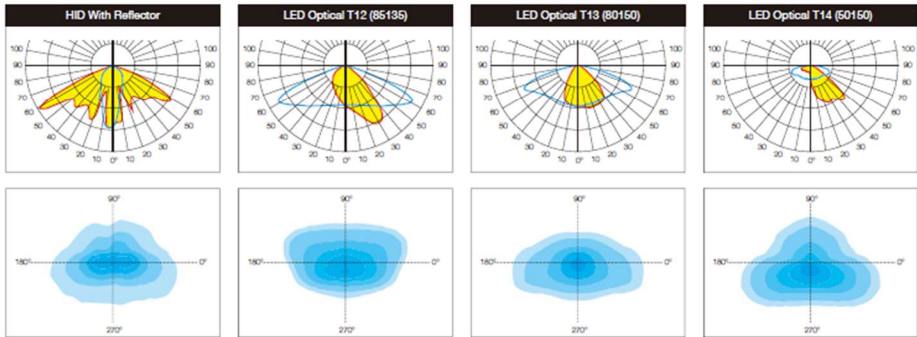

Technology Data

Cord	Power	Voltage	N.W (kg)	G.W (kg)	Packing size (mm)
AT-1031 (30)	30W	100-277	10.2	12.5	690 * 690 * 480
AT-1031 (40)	40W	100-277			
AT-1031 (50)	50W	100-277			
AT-1031 (60)	60W	100-277			
AT-1031 (80)	80W	100-277			

Sealed lamp housing

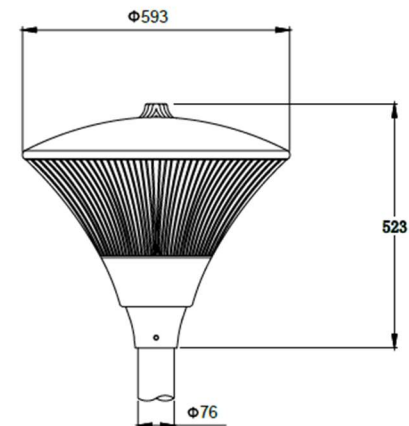



Cord	Power	Voltage	N.W (kg)	G.W (kg)	Packing size (mm)
AT-1032 (30)	20W	100-277	12.6	13.8	593 * 593 * 523
AT-1032 (40)	30W	100-277			
AT-1032 (50)	40W	100-277			
AT-1032 (60)	50W	100-277			
AT-1032 (80)	60W	100-277			

AT-1033



Description

Product description:
Die cast aluminum housing,Aluminum sheet rotating cover
Double photometric diffuser technology
UV-stop PC lamp cover
Sealed lamp housing

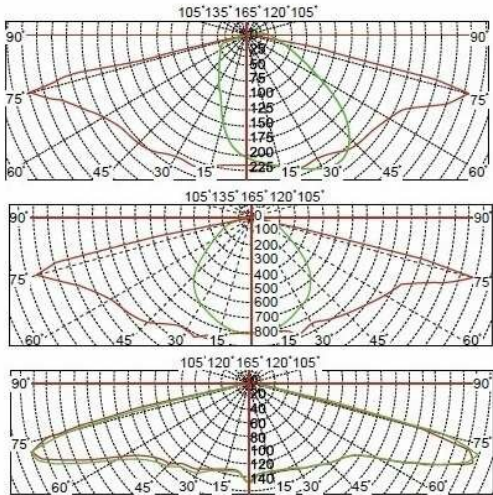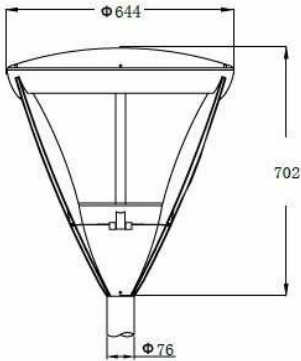

Cord	Power	Voltage	N.W (kg)	G.W (kg)	Packing size (mm)
AT-1033 (35)	35W	100-277	11.5	13.5	655 * 655 * 760
AT-1033 (45)	45W	100-277			
AT-1033 (55)	55W	100-277			
AT-1033 (60)	60W	100-277			



AT-1034



Description

Product description:

- Spinning aluminum housing
- Double photometric diffuser technology
- UV-stop PC lamp cover
- Sealed lamp housing

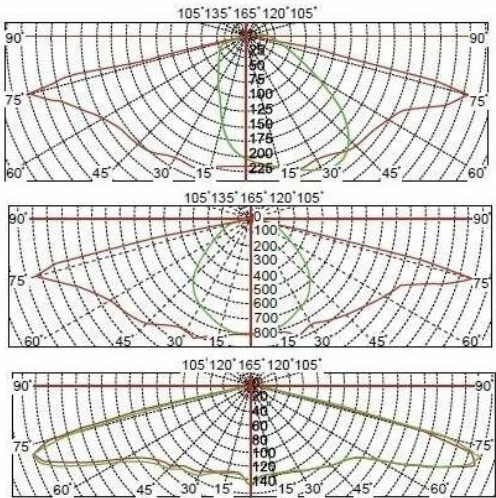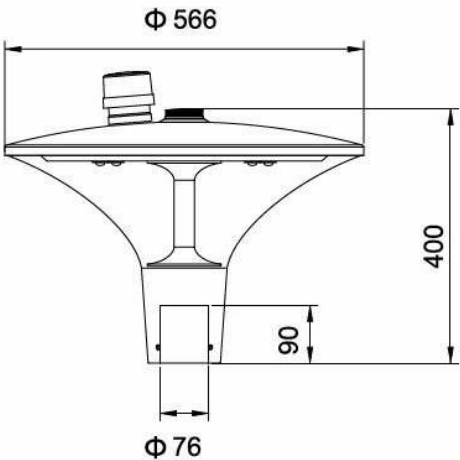

Technology Data


Cord	Power	Voltage	N.W (kg)	G.W (kg)	Packing size (mm)
AT-1034 (20)	25W	100-277	6.5	7.5	605 * 605 * 420
AT-1034 (40)	40W	100-277			
AT-1034 (55)	55W	100-277			
AT-1034 (70)	70W	100-277			

AT-1039




Description

Product description:
whole body Die cast aluminum housing
Double photometric diffuser technology
UV-stop PC lamp cover
Sealed lamp housing

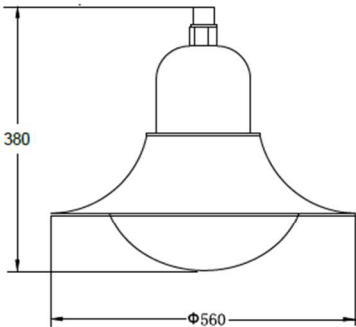

Optical Application

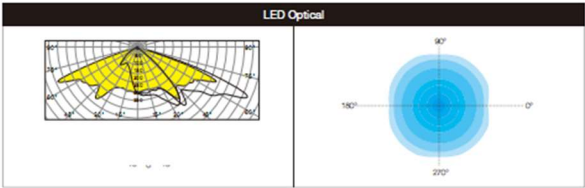

Technology Data

Cord	Power	Voltage	N.W (kg)	G.W (kg)	Packing size (mm)
AT-1039 (20)	20W	100-277	9.8	10.9	560 * 560 * 411
AT-1039 (30)	30W	100-277			
AT-1039 (40)	40W	100-277			
AT-1039 (50)	50W	100-277			
AT-1039 (60)	60W	100-277			

AT-1040




Description


Product description:
Die cast aluminum housing
Double photometric diffuser technology
PC diffusion technology
Sealed lamp housing



Optical Application



AT-1040 (20)

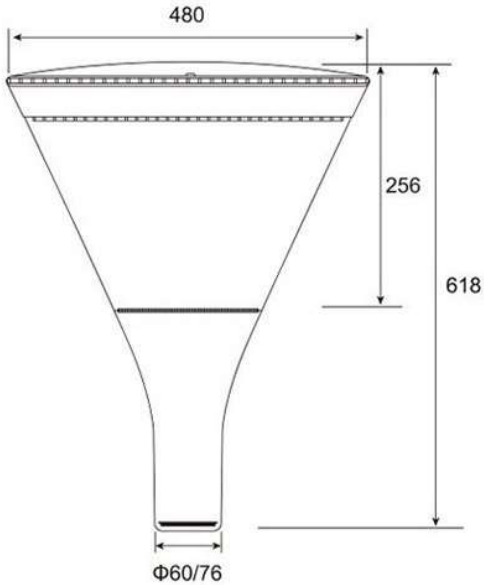

Technology Data


Cord	Power	Voltage	N.W (kg)	G.W (kg)	Packing size (mm)
AT-1040 (30)	30W	100-277	7.4	8.6	660*660*460
AT-1040 (40)	40W	100-277			
AT-1040 (50)	50W	100-277			
AT-1040 (60)	60W	100-277			

AT-1042




Description

Product description:
whole body Die cast aluminum housing
Double photometric diffuser technology
UV-stop PC lamp cover
Sealed lamp housing

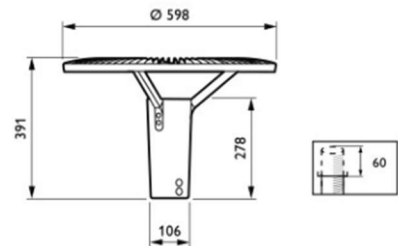

Optical Application

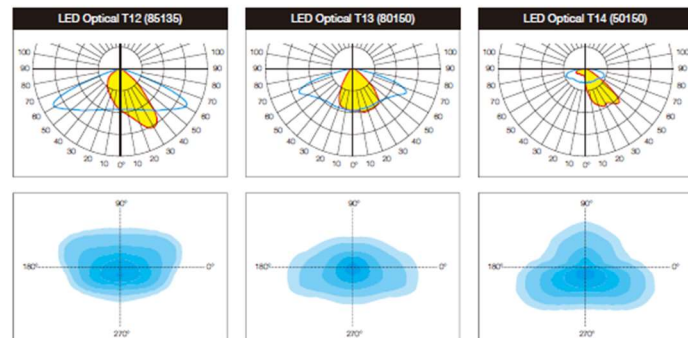

100V-277V
50-60Hz

>50000 h

Technology Data



Cord	Power	Voltage	N.W (kg)	G.W (kg)	Packing size (mm)
AT-1042 (20)	20W	100-277	10.7	11.9	598 * 598 * 391
AT-1042 (30)	30W	100-277			
AT-1042 (40)	40W	100-277			
AT-1042 (50)	50W	100-277			
AT-1042 (60)	60W	100-277			

AT-1044

Description

Product description:

- whole body Die cast aluminum housing
- Double photometric diffuser technology
- UV-stop PC lamp cover
- Sealed lamp housing



Technology Data


Cord	Power	Voltage	N.W (kg)	G.W (kg)	Packing size (mm)
AT-1044 (40)	40W	100-277	10.1	11.7	450*450*577
AT-1044 (60)	60W	100-277			
AT-1044 (80)	80W	100-277			
AT-1044 (100)	100W	100-277			

AT-1045

Description

Product description:

- Spinning aluminum housing
- Double photometric diffuser technology
- UV-stop PC lamp cover
- Sealed lamp housing

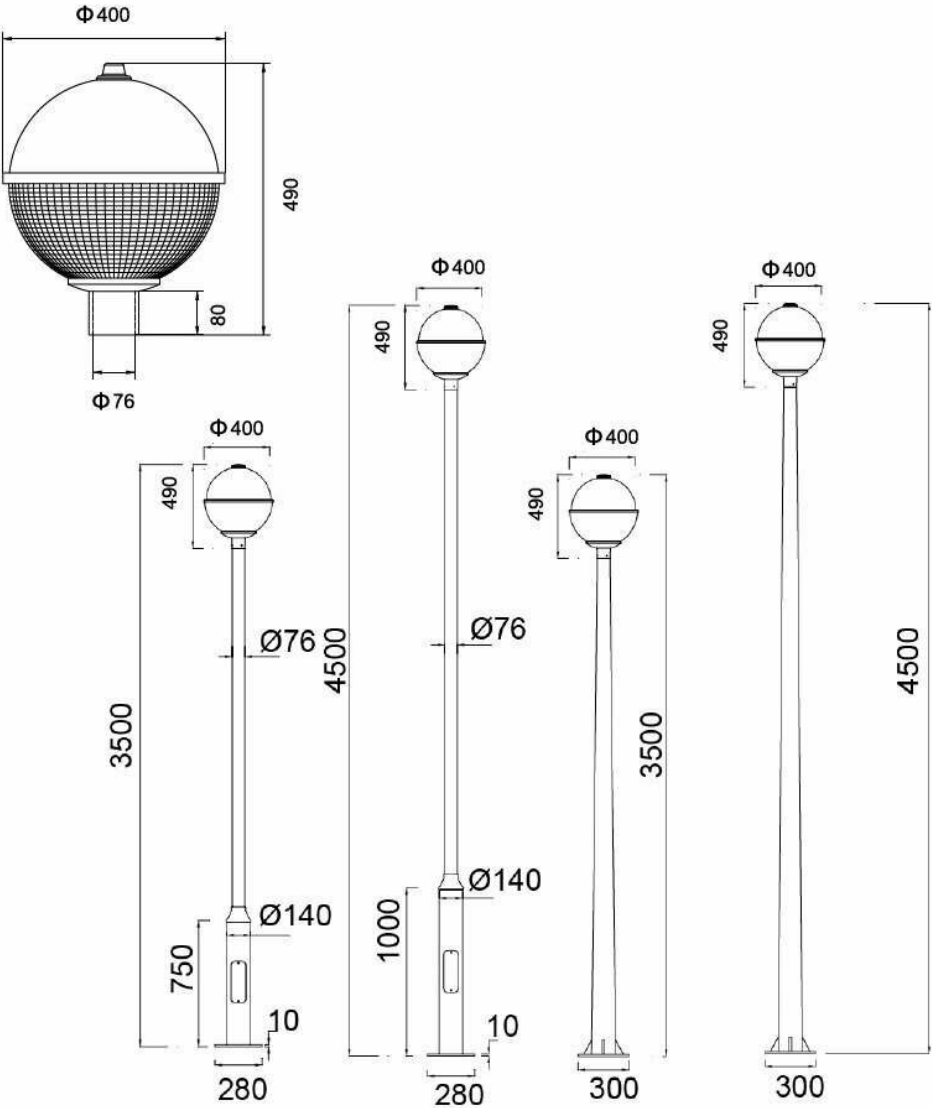

Technology Data

Cord	Power	Voltage	N.W (kg)	G.W (kg)	Packing size (mm)
AT-1045 (30)	30W	100-277	4.5	5.5	470*470*560
AT-1045 (40)	40W	100-277			
AT-1045 (50)	50W	100-277			

AT-1046




Description

Product description:

whole body Die cast aluminum housing
Double photometric diffuser technology
Supper white toughened glass
Individual and sealed module





Optical Application



100V-277V
50-60Hz

>50000 h

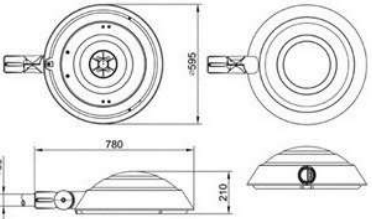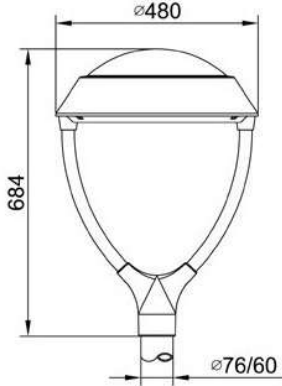

Technology Data


Cord	Power	Voltage	N.W (kg)	G.W (kg)	Packing size (mm)
AT-1046 (30)	30W	100-277	10.2	11.4	520 * 520 * 700
AT-1046 (40)	40W	100-277			
AT-1046 (60)	60W	100-277			
AT-1046 (80)	80W	100-277	12.5	13.4	620 * 620 * 700
AT-1046 (100)	100W	100-277			
AT-1046 (120)	120W	100-277			

AT-1047




Description

Product description:
whole body Die cast aluminum housing
Double photometric diffuser technology
UV-stop PC lamp cover
Sealed lamp housing

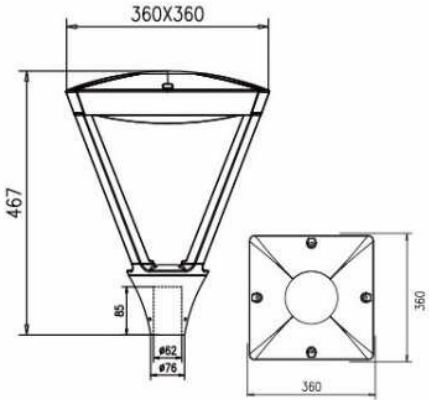

Optical Application

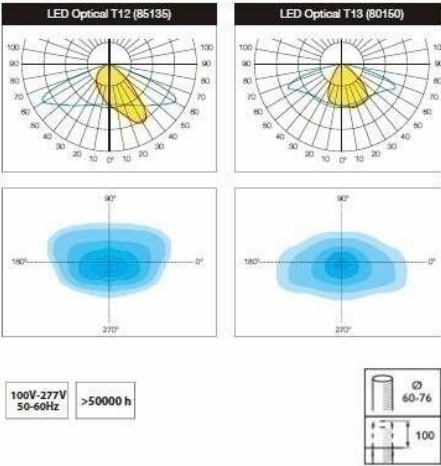


Technology Data

Cord	Power	Voltage	N.W (kg)	G.W (kg)	Packing size (mm)
AT-1047 (30)	30W	100-277	9.4	10.6	400 * 400 * 500
AT-1047 (40)	40W	100-277			
AT-1047 (60)	60W	100-277			
AT-1047 (80)	80W	100-277			


AT-1048

Description

Product description:
whole body Die cast aluminum housing
Double photometric diffuser technology
UV-stop PC lamp cover
Sealed lamp housing

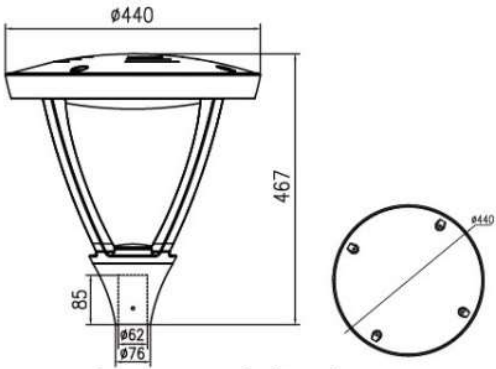

Optical Application

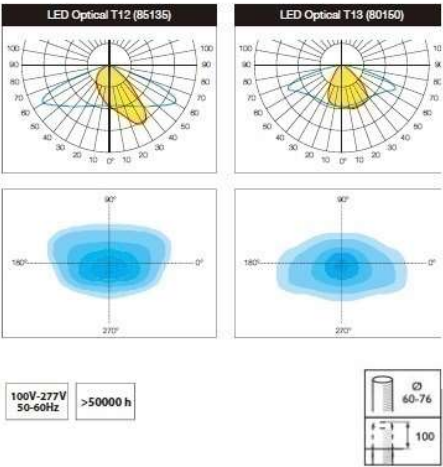

Technology Data

Cord	Power	Voltage	N.W (kg)	G.W (kg)	Packing size (mm)
AT-1048 (30)	30W	100-277	9.4	10.6	400 * 400 * 500
AT-1048 (40)	40W	100-277			
AT-1048 (60)	60W	100-277			
AT-1048 (80)	80W	100-277			

AT-1049


Description

Product description:

- whole body Die cast aluminum housing
- Double photometric diffuser technology
- UV-stop PC lamp cover
- Sealed lamp housing



Optical Application

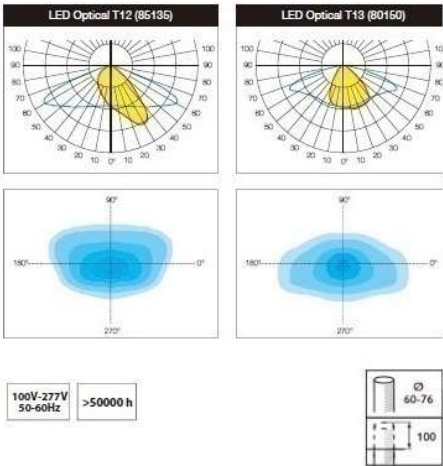

Technology Data


Cord	Power	Voltage	N.W (kg)	G.W (kg)	Packing size (mm)
AT-1049 (20)	20W	100-277	8.4	9.6	720 * 720 * 520
AT-1049 (30)	30W	100-277			
AT-1049 (40)	40W	100-277			
AT-1049 (50)	50W	100-277			
AT-1049 (60)	60W	100-277			

AT-1059

Description

Product description:

whole body Die cast aluminum housing
Double photometric diffuser technology
Supper white toughened glass
Individual and sealed module

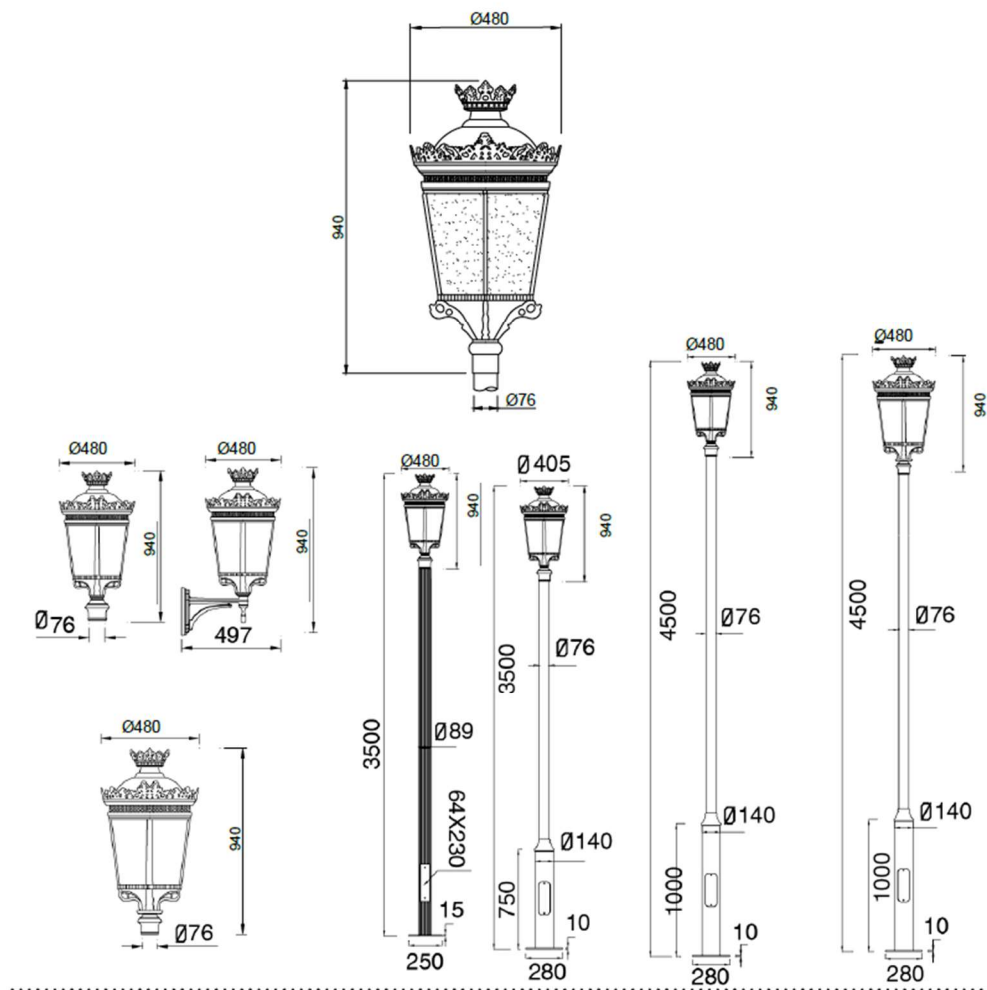

Technology Data



Cord	Power	Voltage	N.W (kg)	G.W (kg)	Packing size (mm)
AT-1059 (30)	30W	100-277	9.9	10.9	500 * 500 * 900
AT-1059 (40)	40W	100-277			
AT-1059 (60)	60W	100-277			
AT-1059 (80)	80W	100-277			

AT-1060

Description

Extruded Aluminum pole

Double photometric diffuser technology

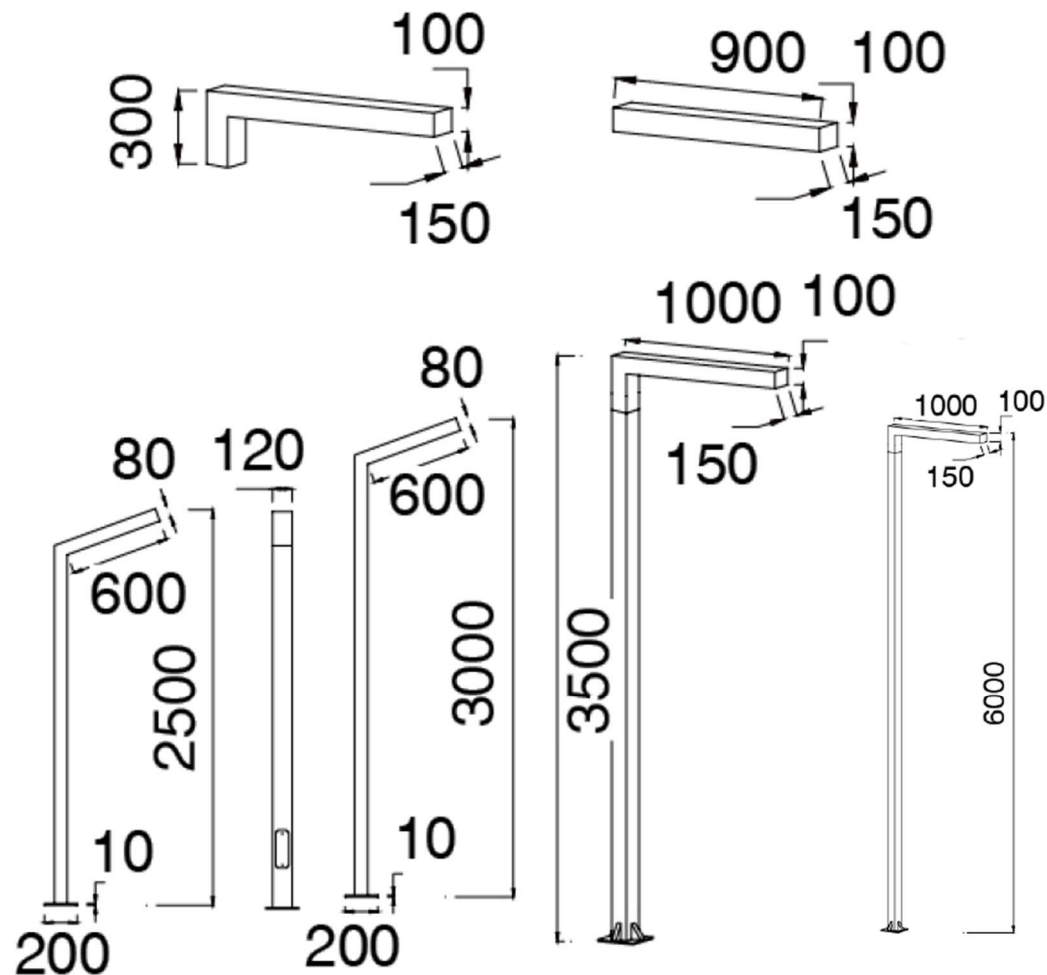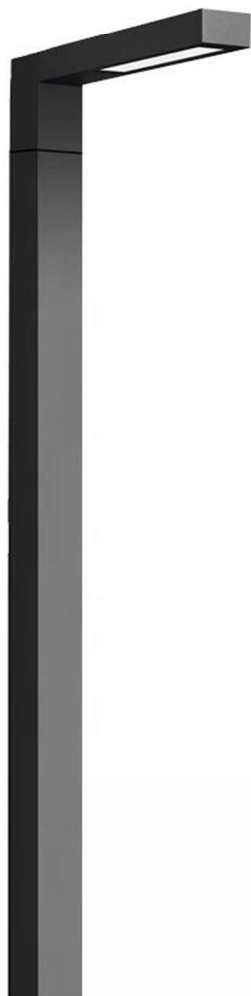

Technology Data




Cord	Power	Voltage	N.W (kg)	G.W (kg)	Packing size (mm)
AT-1060 (20)	20W	100-277	5.8	6.9	1015 * 320 * 200
AT-1060 (30)	30W	100-277			
AT-1060 (40)	40W	100-277			
AT-1060 (50)	50W	100-277			
AT-1060 (60)	60W	100-277			
AT-1060 (70)	70W	100-277			

AT-1061

Description

Extruded Aluminum pole

Double photometric diffuser technology

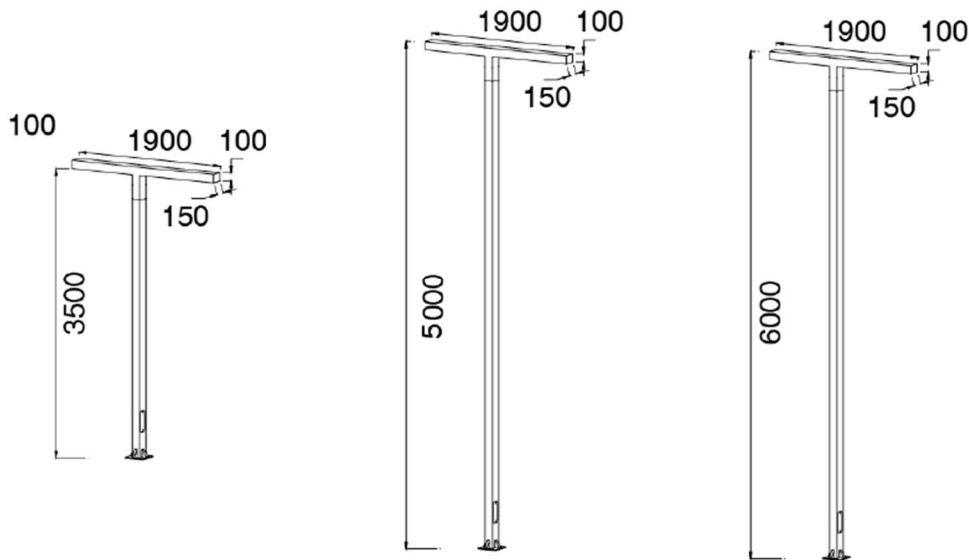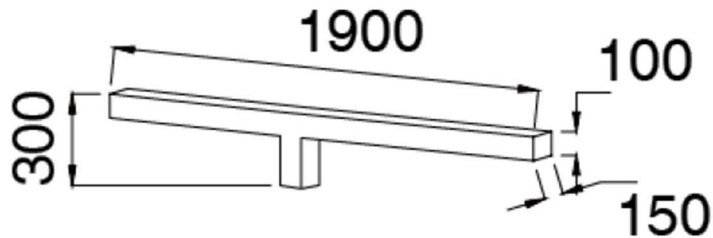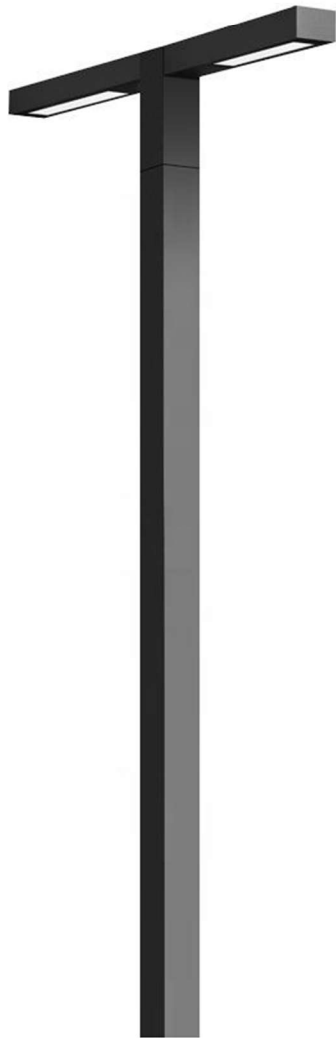

Technology Data

Cord	Power	Voltage	N.W (kg)	G.W (kg)	Packing size (mm)
AT-1061 (2*20)	40W	100-277	13.8	14.9	1950*320*200
AT-1061 (2*30)	40W	100-277			
AT-1061 (2*40)	80W	100-277			
AT-1061 (2*50)	100W	100-277			
AT-1061 (2*60)	120W	100-277			
AT-1061 (2*70)	140W	100-277			




AT-1062



Description

Extruded Aluminum pole

Double photometric diffuser technology

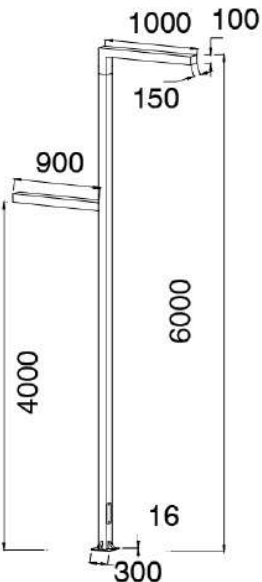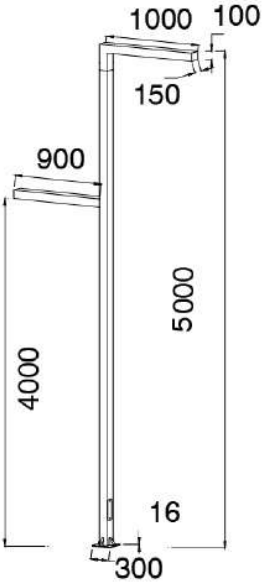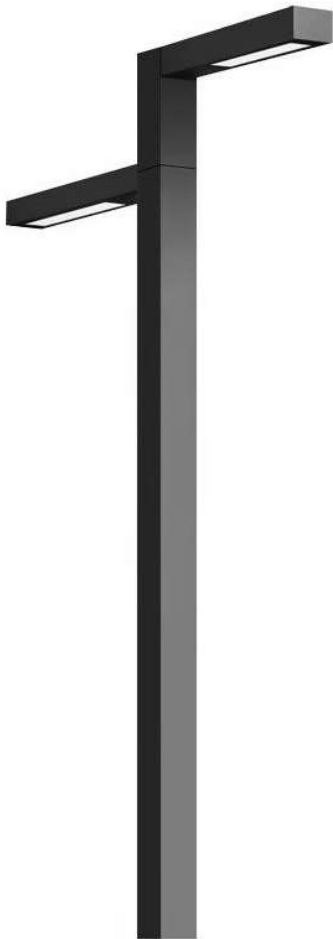

Technology Data

Cord	Power	Voltage	N.W (kg)	G.W (kg)	Packing size (mm)
AT-1062	20+40W	100-277	13.8	14.9	1950*320*200
AT-1062	30+40W	100-277			
AT-1062	30+50W	100-277			
AT-1062	30+60W	100-277			
AT-1062	40+60W	100-277			

AT-1063



Description

Product description:


Die cast aluminum housing

Tempered glass mask


Sealed lamp housing

Double photometric diffuser technology

Equipped with NEMA socket

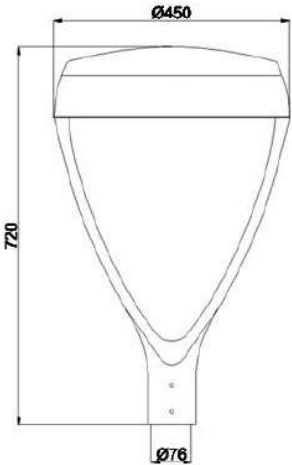

Optical Application

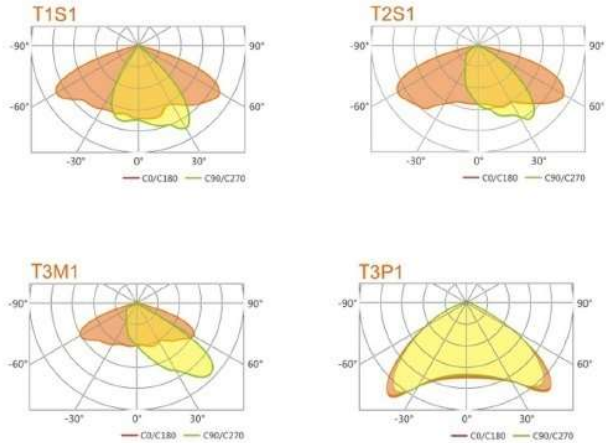

Technology Data

Cord	Power	Voltage	N.W (kg)	G.W (kg)	Packing size (mm)
AT-1063 (30)	30W	100-277	10.8	11.8	450*450*720
AT-1063 (40)	40W	100-277			
AT-1063 (60)	60W	100-277			
AT-1063 (80)	80W	100-277			
AT-1063 (100)	100W	100-277			

AT-1068



Description

Product description:



Die cast aluminum housing

Tempered glass mask


Sealed lamp housing

Double photometric diffuser technology

Equipped with NEMA socket

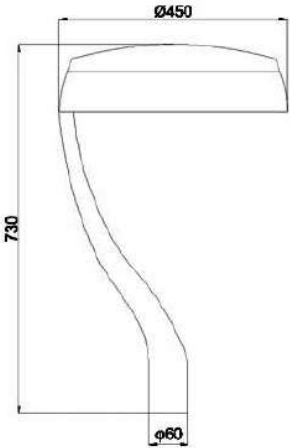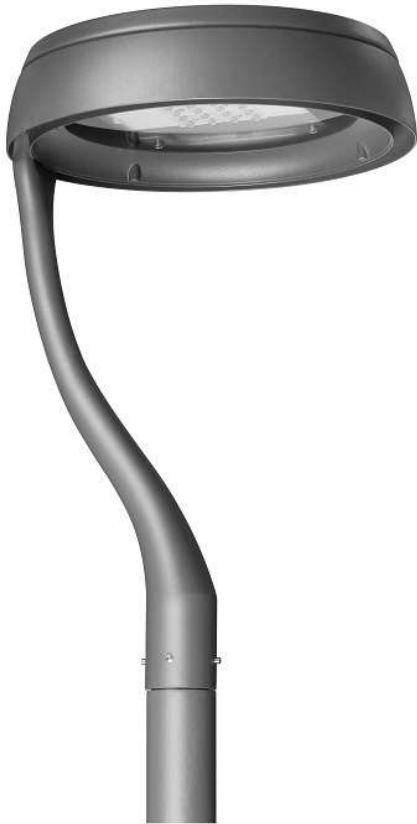

Optical Application

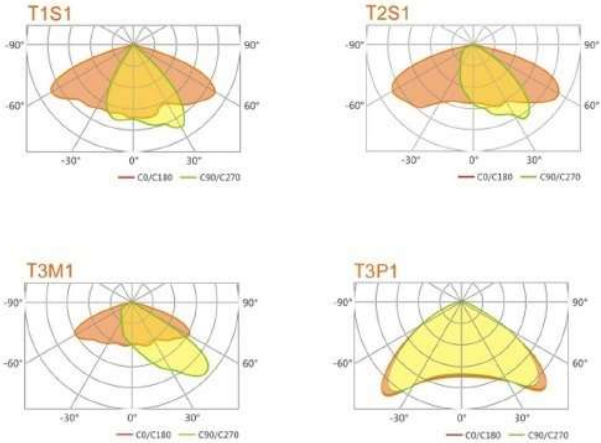

Technology Data

Cord	Power	Voltage	N.W (kg)	G.W (kg)	Packing size (mm)
AT-1068 (30)	30W	100-277	10.8	11.8	470*470*750
AT-1068 (40)	40W	100-277			
AT-1068 (60)	60W	100-277			
AT-1068 (80)	80W	100-277			
AT-1068 (100)	100W	100-277			


AT-1069



Description


Product description:

- Die cast aluminum housing
- Optical grade PMMA lamp shades
- Sealed lamp housing
- Double photometric diffuser technology
- Equipped with NEMA socket

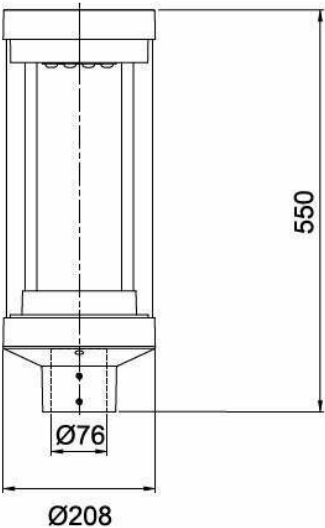

Optical Application

Type

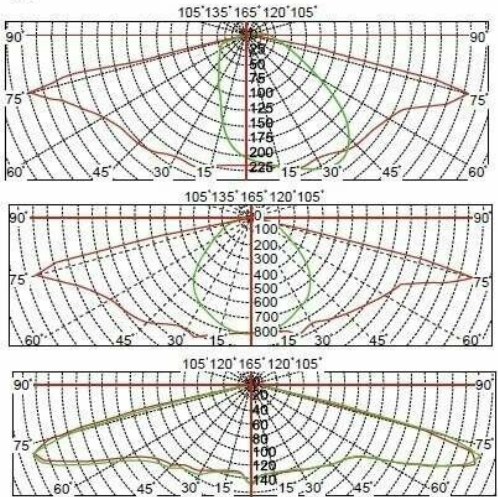

Technology Data

Cord	Power	Voltage	N.W (kg)	G.W (kg)	Packing size (mm)
AT-1069 (20)	20W	100-277	5.8	6.8	580*265*265
AT-1069 (30)	30W	100-277			
AT-1069 (40)	40W	100-277			
AT-1069 (60)	60W	100-277			

AT-1070



Description

Product description:


Die cast aluminum housing

Tempered glass mask


Sealed lamp housing

Double photometric diffuser technology

Equipped with NEMA socket

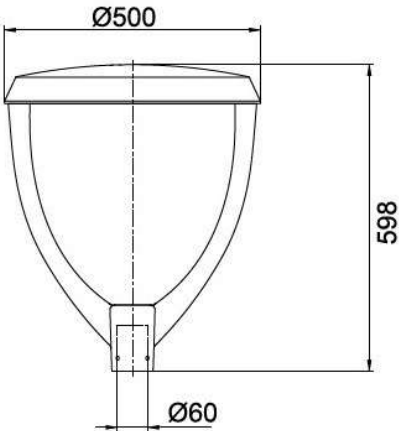

Type

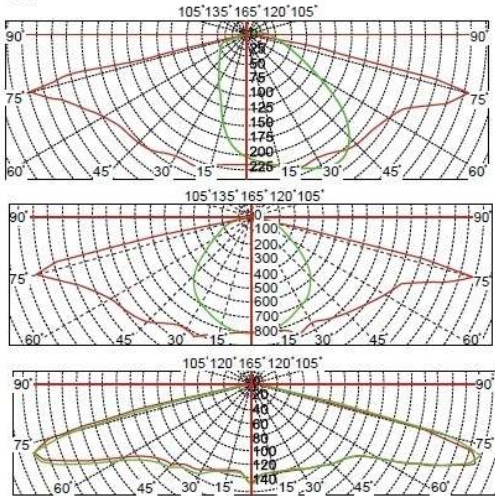

Technology Data

Cord	Power	Voltage	N.W (kg)	G.W (kg)	Packing size (mm)
AT-1070 (30)	30W	100-277	8.8	10.3	560*560*220
AT-1070 (40)	40W	100-277			
AT-1070 (55)	55W	100-277			
AT-1070 (60)	60W	100-277			
AT-1070 (70)	70W	100-277			
AT-1070 (80)	80W	100-277			
AT-1070 (90)	90W	100-277			
AT-1070 (100)	100W	100-277			

AT-1074

Description

Product description:


Die cast aluminum housing

Tempered glass mask


Sealed lamp housing

Double photometric diffuser technology

Equipped with NEMA socket

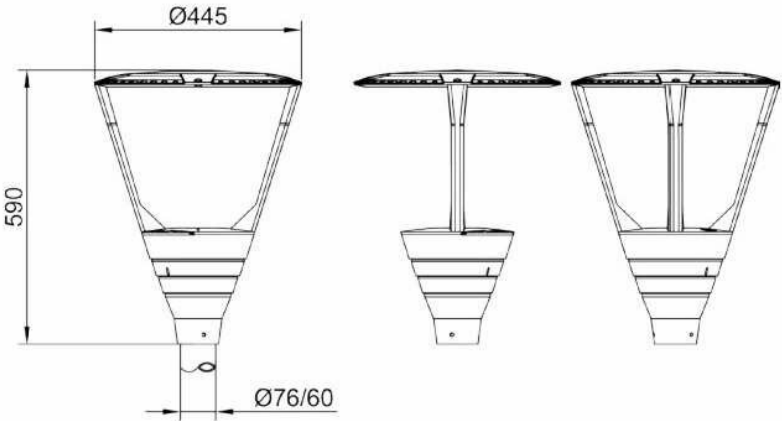

Optical Application

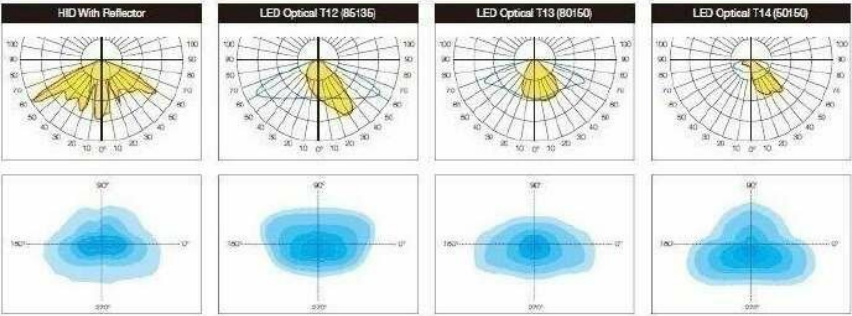

100V-277V
50-60Hz

>50000 h



Technology Data


Cord	Power	Voltage	N.W (kg)	G.W (kg)	Packing size (mm)
AT-1074 (30)	30W	100-277	10.5	11.6	510*510*600
AT-1074 (40)	40W	100-277			
AT-1074 (60)	60W	100-277			
AT-1074 (80)	80W	100-277			
AT-1074 (100)	100W	100-277			

AT-1076


Description

Product description:

- Die cast aluminum housing
- Tempered glass mask
- Sealed lamp housing
- Double photometric diffuser technology
- Equipped with NEMA socket

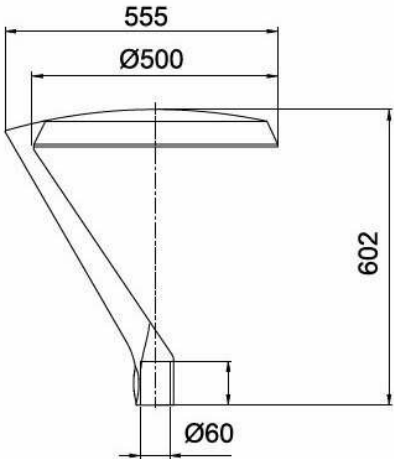

Type

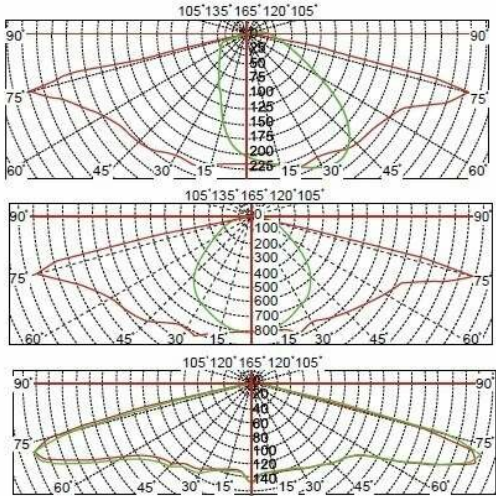

Technology Data

Cord	Power	Voltage	N.W (kg)	G.W (kg)	Packing size (mm)
AT-1076 (30)	30W	100-277	8.8	10.3	560*560*220
AT-1076 (40)	40W	100-277			
AT-1076 (55)	55W	100-277			
AT-1076 (60)	60W	100-277			
AT-1076 (70)	70W	100-277			
AT-1076 (80)	80W	100-277			
AT-1076 (90)	90W	100-277			
AT-1076 (100)	100W	100-277			

AT-1077



Description

Product description:


Die cast aluminum housing

Tempered glass mask


Sealed lamp housing

Double photometric diffuser technology

Equipped with NEMA socket

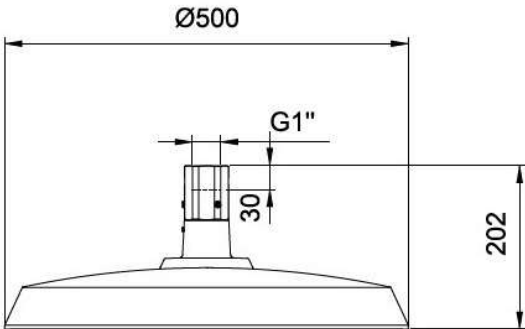

Type

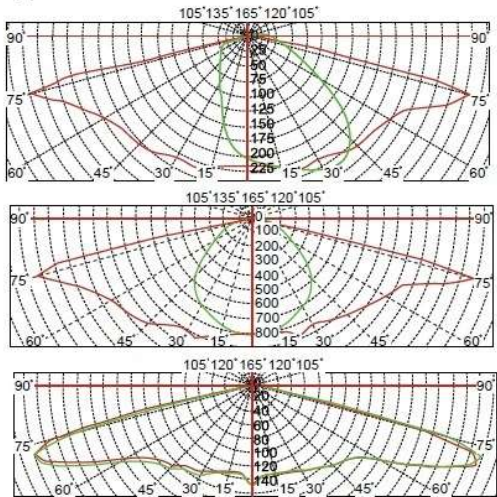

Technology Data

Cord	Power	Voltage	N.W (kg)	G.W (kg)	Packing size (mm)
AT-1077 (30)	30W	100-277	6.8	7.3	560*560*260
AT-1077 (40)	40W	100-277			
AT-1077 (55)	55W	100-277			
AT-1077 (60)	60W	100-277			
AT-1077 (70)	70W	100-277			
AT-1077 (80)	80W	100-277			
AT-1077 (90)	90W	100-277			
AT-1077 (100)	100W	100-277			


AT-1078




Description

Product description:

- Spinning aluminum housing
- Double photometric diffuser technology
- UV-stop PC lamp cover
- Sealed lamp housing

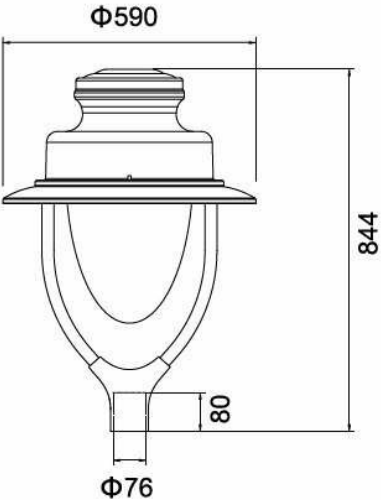

Optical Application

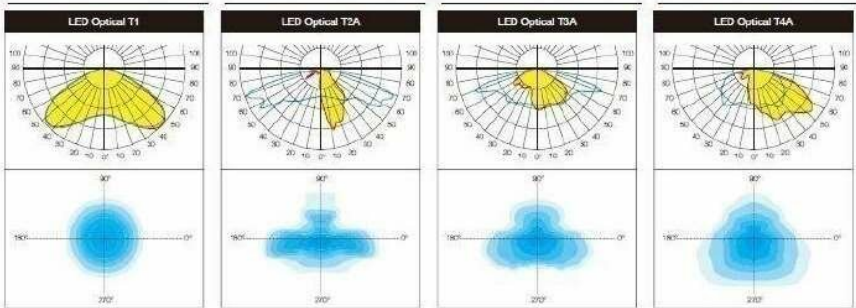

Technology Data

100V-277V
50-60Hz

>50000 h



Cord	Power	Voltage	N.W (kg)	G.W (kg)	Packing size (mm)
AT-1078 (30)	30W	100-277	8.0	9.2	540*540*115
AT-1078 (40)	40W	100-277			
AT-1078 (60)	60W	100-277			
AT-1078 (80)	80W	100-277			



AT-1081



Description

Product description:

Die cast aluminum housing, Drawn aluminum rod
Optical grade PMMA lamp shades
Sealed lamp housing
216PCS 3030 SMT process
Even light transmission

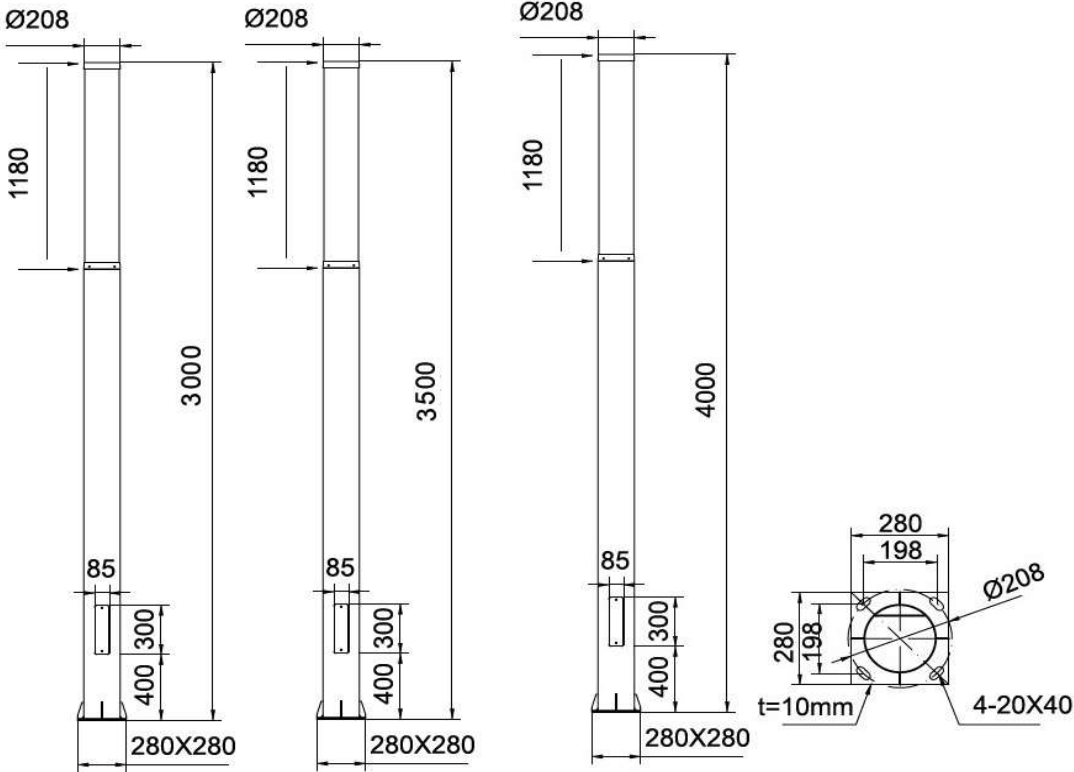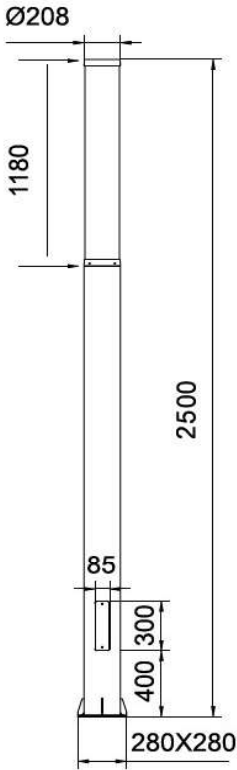


Technology Data

Cord	Power	Voltage	N.W (kg)	G.W (kg)	Packing size (mm)
AT-1081 (20)	20W	100-277	7.8	8.8	1210*265*265
AT-1081 (30)	30W	100-277			
AT-1081 (45)	45W	100-277			
AT-1081 (60)	60W	100-277			

AT-1086

Description

Product description:
Aluminum die-casting housing
Optical grade PMMA lamp shades
Sealed lamp housing
Double photometric diffuser technology

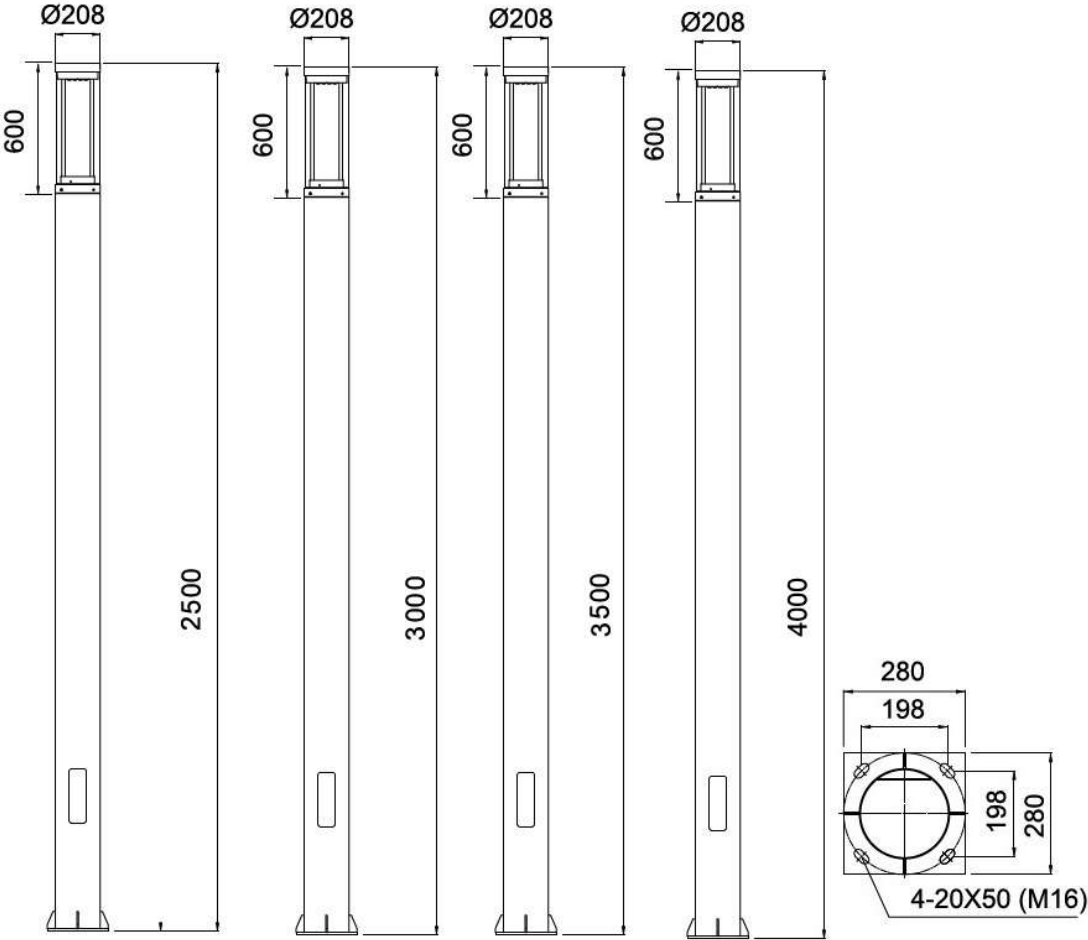

Technology Data

Cord	Power	Voltage	N.W (kg)	G.W (kg)	Packing size (mm)
AT-1086 (20)	20W	100-277	5.8	6.8	265*265*630
AT-1086 (30)	30W	100-277			
AT-1086 (40)	40W	100-277			
AT-1086 (60)	60W	100-277			

AT-1088




Description


Description:

Die-cast and sanding Aluminum housing

White Polymer plate

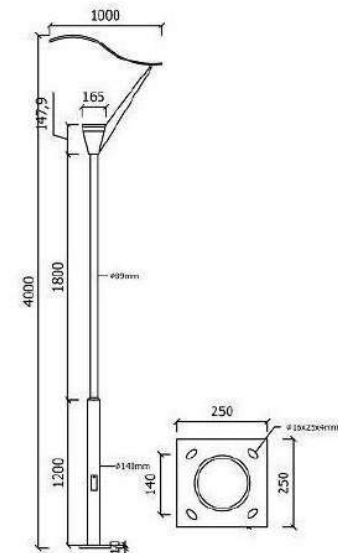

Optical Application



Technology Data

Cord	Power	Voltage	N.W (kg)	G.W (kg)	Packing size (mm)
AT-1088 (20)	20W	100-277	7.0	8.7	1000*255*650
AT-1088 (30)	30W	100-277			
AT-1088 (40)	40W	100-277			

AT-1090

Description

Product description:


Die cast aluminum housing

Tempered glass mask


Sealed lamp housing

Double photometric diffuser technology

Equipped with NEMA socket

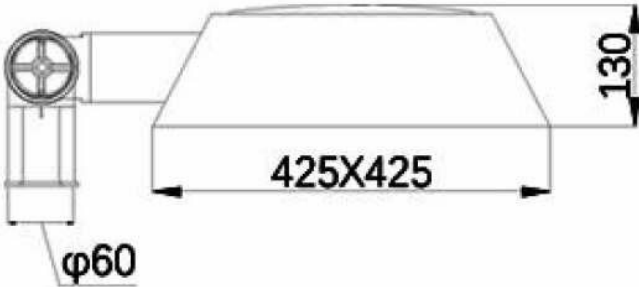

Optical Application

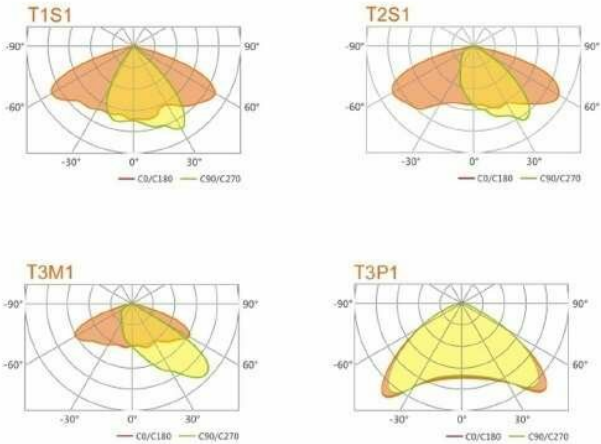

Technology Data


Cord	Power	Voltage	N.W (kg)	G.W (kg)	Packing size (mm)
AT-1090 (30)	30W	100-277	10.8	11.8	450*450*620
AT-1090 (40)	40W	100-277			
AT-1090 (60)	60W	100-277			
AT-1090 (80)	80W	100-277			
AT-1090 (100)	100W	100-277			

AT-1091




Description

Product description:
whole body Die cast aluminum housing
Double photometric diffuser technology
Supper white toughened glass
Individual and sealed module

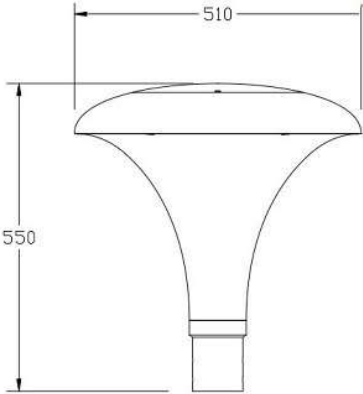

Optical Application

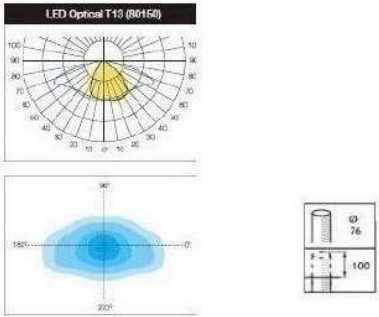

Technology Data



Cord	Power	Voltage	N.W (kg)	G.W (kg)	Packing size (mm)
AT-1091 (30)	30W	100-277	10.8	11.8	510*510*550
AT-1091 (40)	40W	100-277			
AT-1091 (60)	60W	100-277			
AT-1091 (80)	80W	100-277			
AT-1091 (100)	100W	100-277			

AT-1092



Description


Product description:

Spinning aluminum housing

Double photometric diffuser technology

UV-stop PC lamp cover

Sealed lamp housing

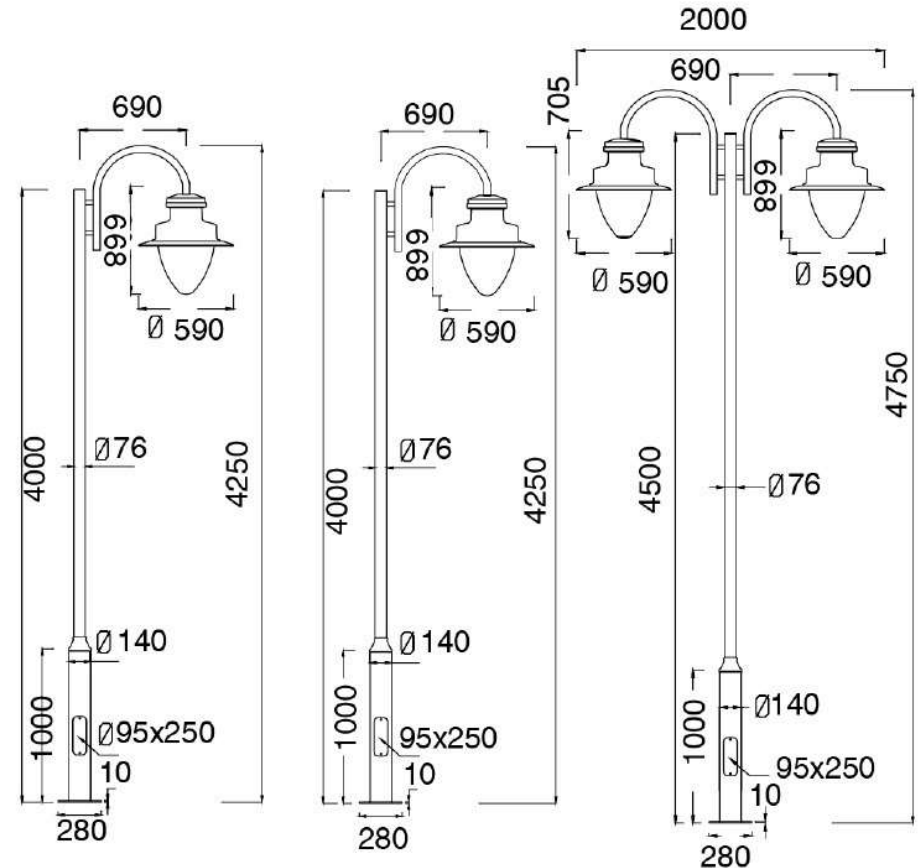


Cord	Power	Voltage	N.W (kg)	G.W (kg)	Packing size (mm)
AT-1092 (30)	30W	100-277	10.8	11.8	570*570*390
AT-1092 (40)	40W	100-277			
AT-1092 (60)	60W	100-277			
AT-1092 (80)	80W	100-277			
AT-1092 (100)	100W	100-277			

AT-1093




Description

Product description:
whole body Die cast aluminum housing
Double photometric diffuser technology
Supper white toughened glass
Sealed lamp housing

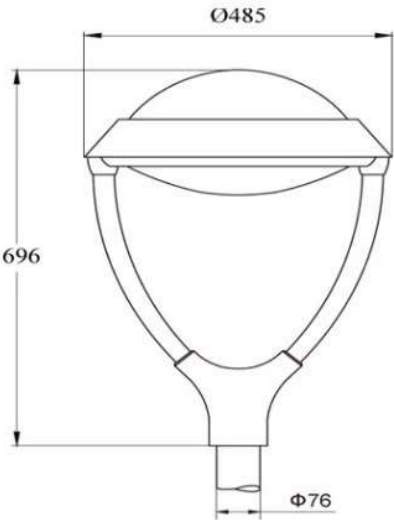

Optical Application

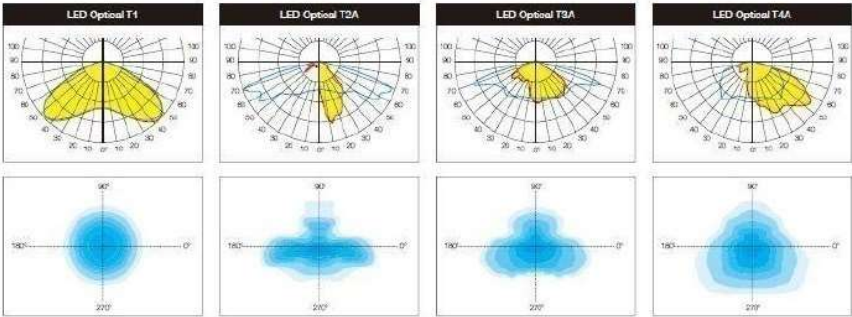

100V-277V
50-60Hz

>50000 h



Technology Data



Cord	Power	Voltage	N.W (kg)	G.W (kg)	Packing size (mm)
AT-1093 (30)	30W	100-277	10.8	11.8	490*490*650
AT-1093 (40)	40W	100-277			
AT-1093 (60)	60W	100-277			

AT-1094



Description


Product description:
Die cast aluminum housing
Indirect lighting technology
UV-stop PC lamp cover

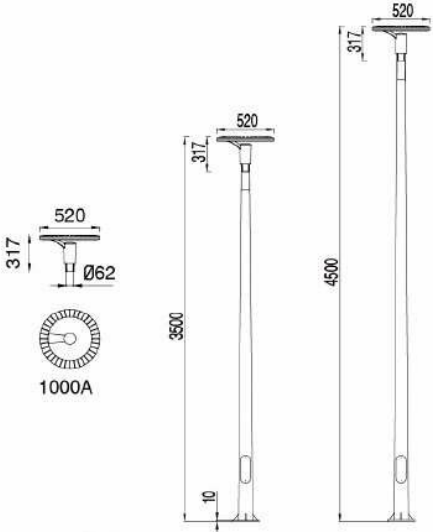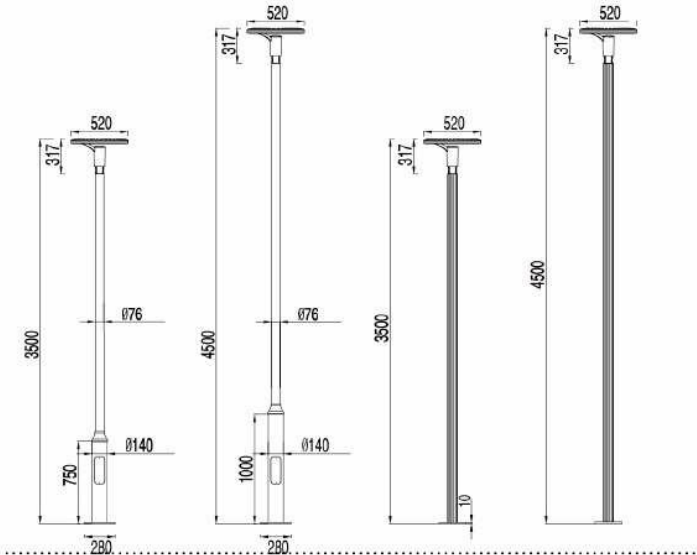

Technology Data

Cord	Power	Voltage	N.W (kg)	G.W (kg)	Packing size (mm)
AT-1094 (30)	30W	100-277	10.8	11.8	520*520*317
AT-1094 (45)	45W	100-277			
AT-1094 (60)	60W	100-277			
AT-1094 (80)	80W	100-277			

UV-stop PC lamp cover

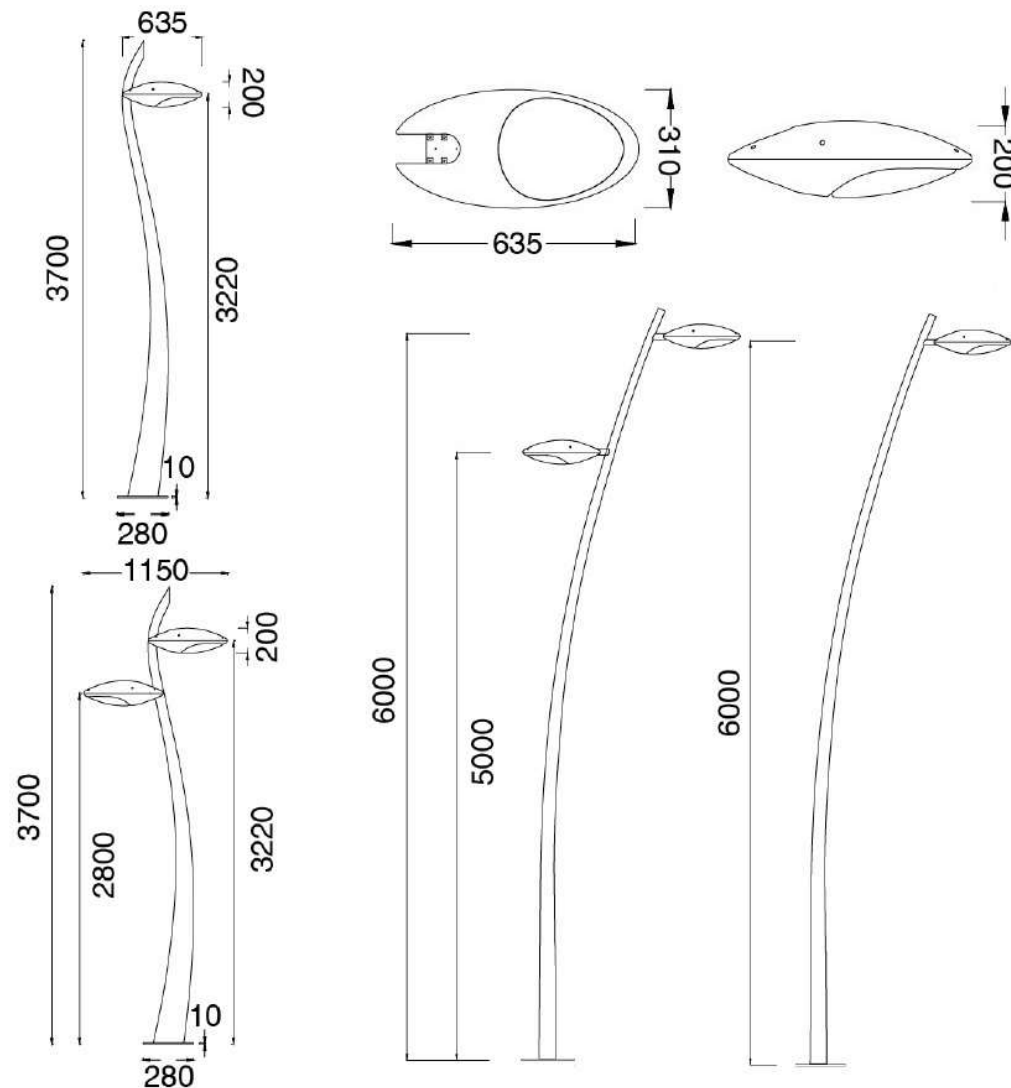


Cord	Power	Voltage	N.W (kg)	G.W (kg)	Packing size (mm)
AT-1099 (25)	25W	100-277	9.8	10.8	635*310*200
AT-1099 (50)	50W	100-277			
AT-1099 (70)	70W	100-277			

AT-1100



Description

Product description:
Die-cast Aluminum housing;
Spinning Aluminum Top Cover
UV-stop PC lamp cover

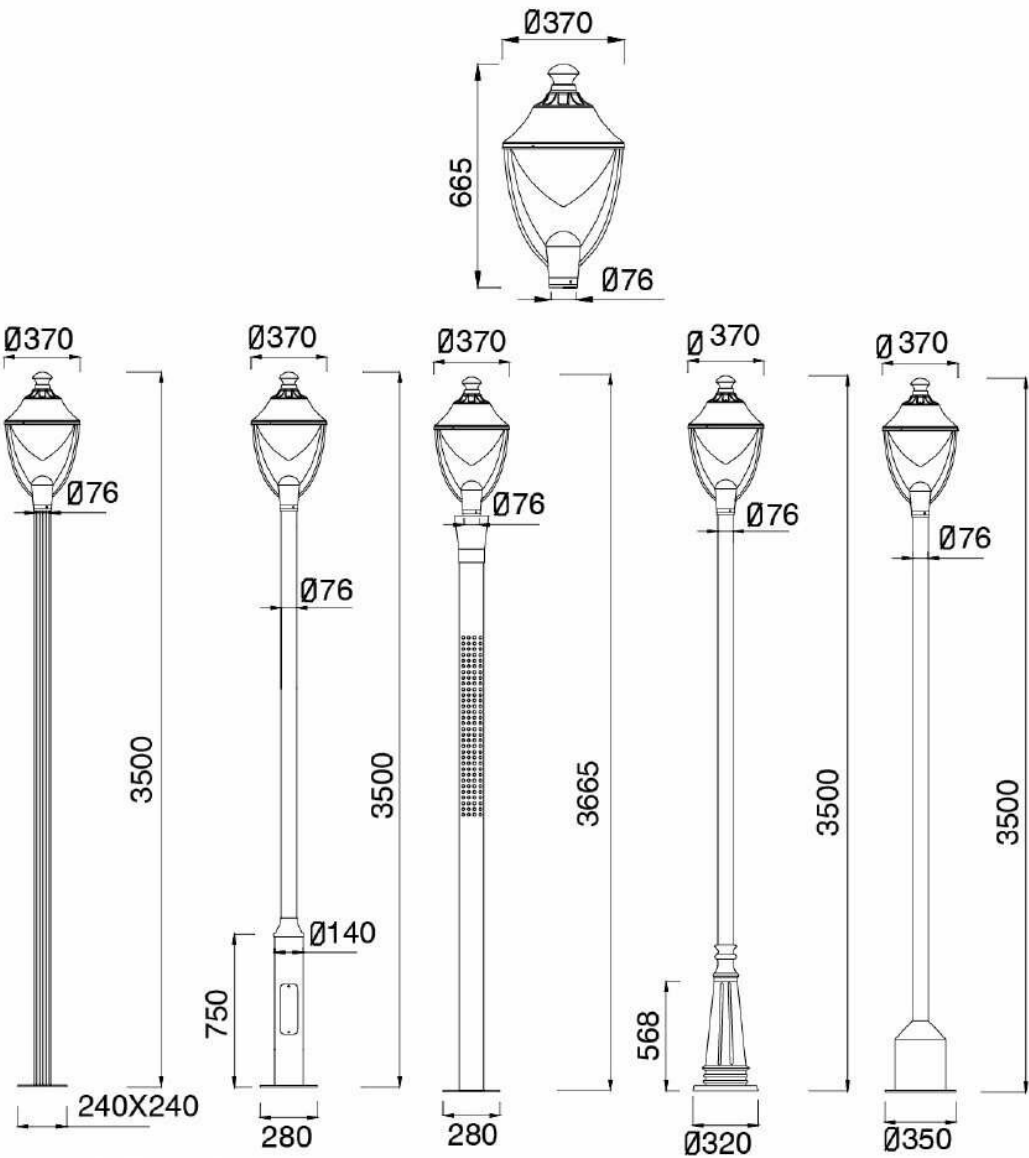

Technology Data


Cord	Power	Voltage	N.W (kg)	G.W (kg)	Packing size (mm)
AT-1100 (25)	25W	100-277	9.5	10.6	370*370*365
AT-1100 (35)	35W	100-277			
AT-1100 (60)	60W	100-277			

AT-1101



Description

Die-cast Aluminum housing;
Spinning Aluminum Top Cover
UV-stop PC lamp cover

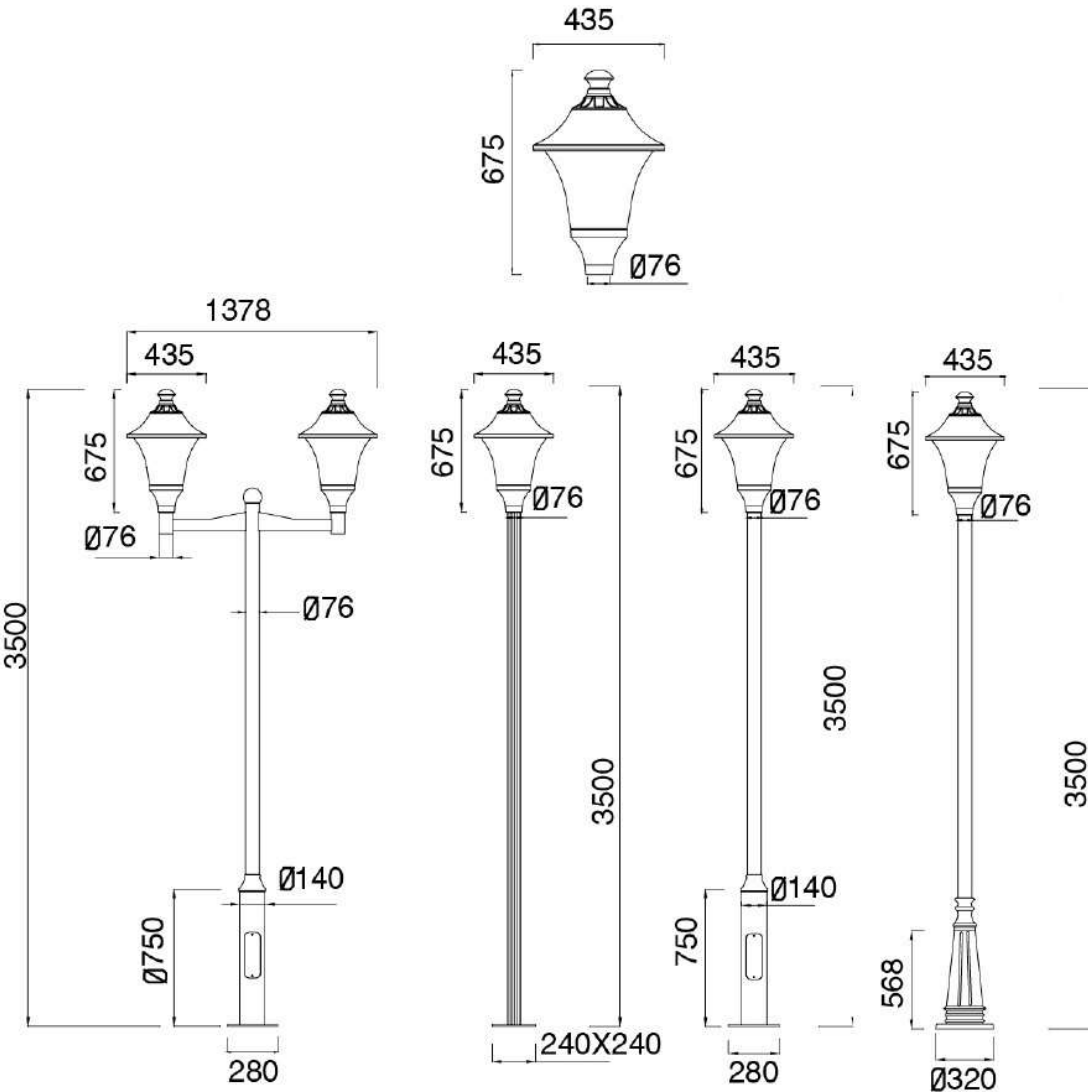

Technology Data

Cord	Power	Voltage	N.W (kg)	G.W (kg)	Packing size (mm)
AT-1101 (25)	25W	100-277	9.0	10.2	435*435*675
AT-1101 (35)	35W	100-277			
AT-1101 (60)	60W	100-277			




Description

Description:

Die-cast Aluminum housing;

Spinning Aluminum Top Cover

UV-stop PC lamp cover

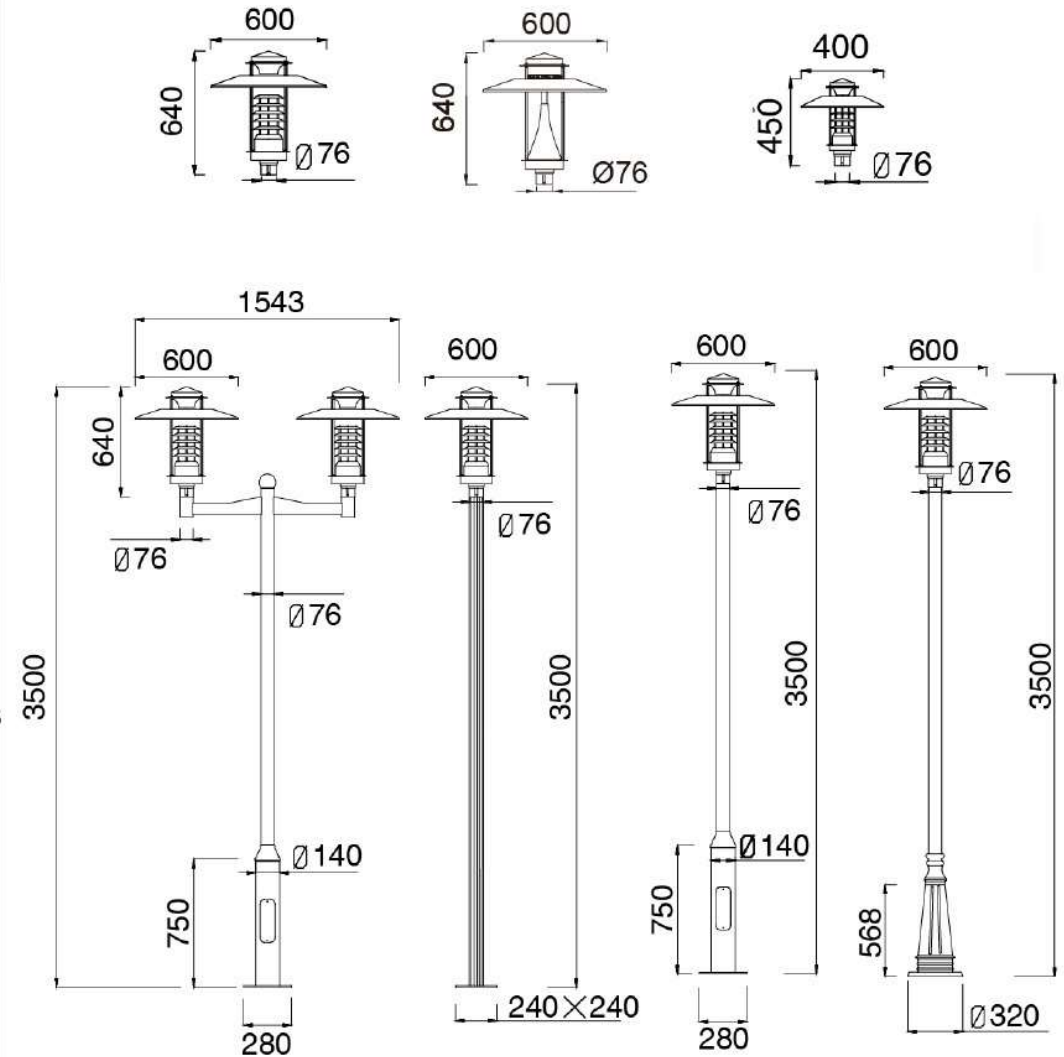

Technology Data


Cord	Power	Voltage	N.W (kg)	G.W (kg)	Packing size (mm)
AT-1102 (25)	25W	100-277	8.0	9.2	600*600*640
AT-1102 (35)	35W	100-277			
AT-1102 (60)	60W	100-277			

AT-1103



Description


Description:
Die-cast Aluminum housing;
Spinning Aluminum Top Cover
UV-stop PC lamp cover

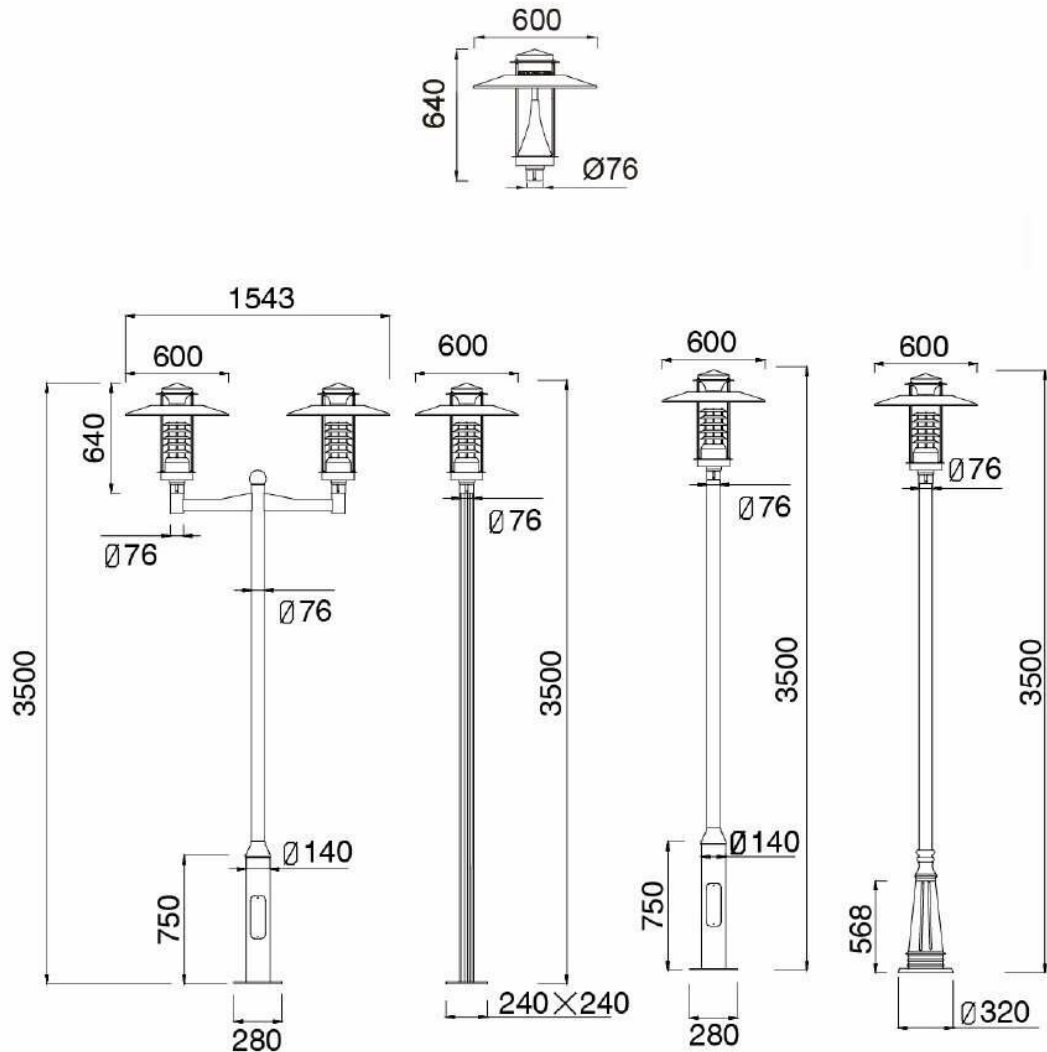

Technology Data

Cord	Power	Voltage	N.W (kg)	G.W (kg)	Packing size (mm)
AT-1103 (25)	25W	100-277	8.0	9.2	600*600*640
AT-1103 (35)	35W	100-277			
AT-1103 (60)	60W	100-277			

Die-cast Aluminum housing;
Spinning Aluminum Top Cover
UV-stop PC lamp cover

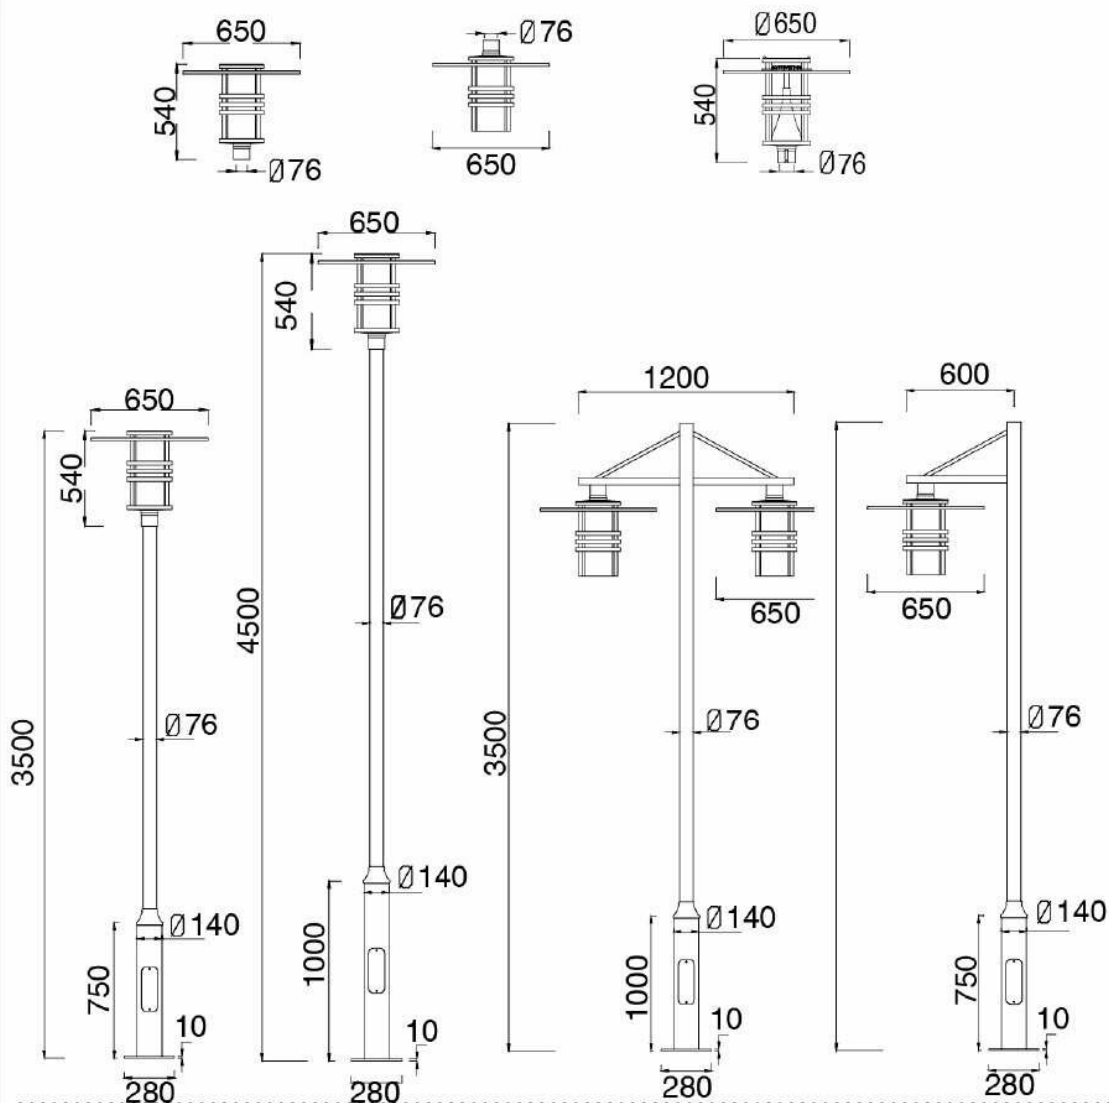


Cord	Power	Voltage	N.W (kg)	G.W (kg)	Packing size (mm)
AT-1104 (25)	25W	100-277	8.0	9.2	650*650*540
AT-1104 (35)	35W	100-277			
AT-1104 (60)	60W	100-277			

AT-1108



Description

Description:
Die-cast Aluminum housing
Top Aluminium sheet reflector system

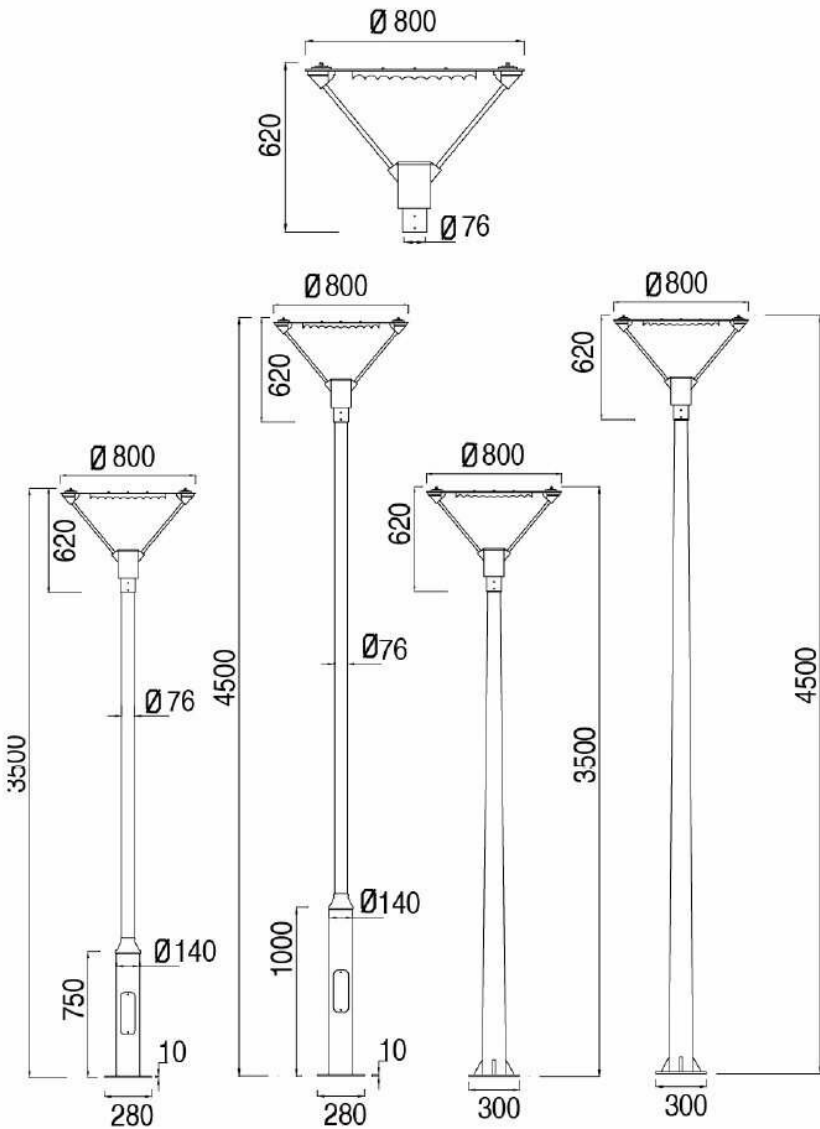

Technology Data

Cord	Power	Voltage	N.W (kg)	G.W (kg)	Packing size (mm)
AT-1108 (20)	20W	100-277	10.1	11.3	800*800*620
AT-1108 (30)	30W	100-277			
AT-1108 (40)	40W	100-277			


AT-1111



Description

Extruded Aluminum pole

Double photometric diffuser technology

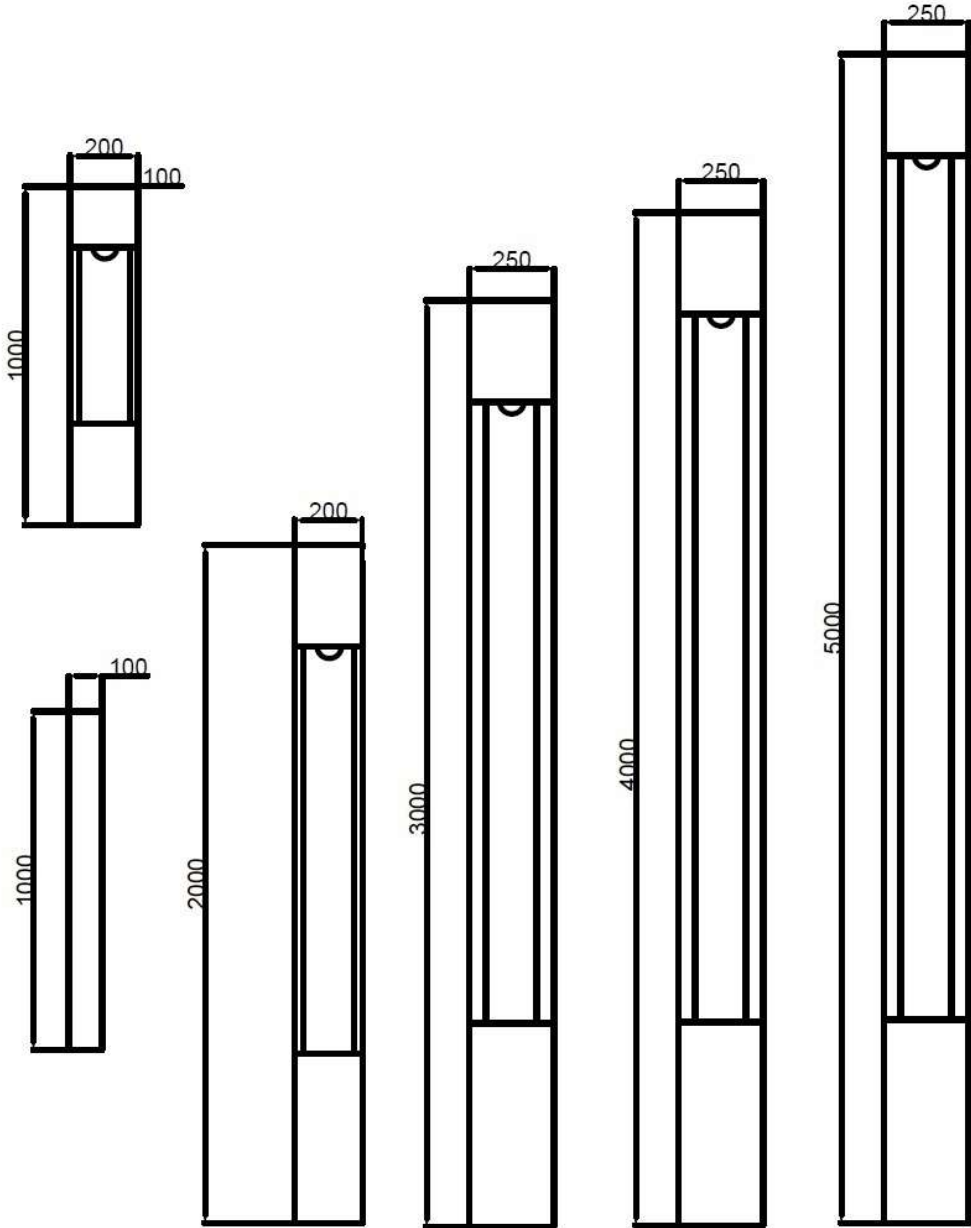


Cord	Power	Voltage	N.W (kg)	G.W (kg)	Packing size (mm)
AT-1111 (20-60)	20-60W	100-277	9.3	10.9	758*360*125

AT-1113



Description

Description:
Die-cast Aluminum housing;
Spinning Aluminum Top Cover
UV-stop PC lamp cover

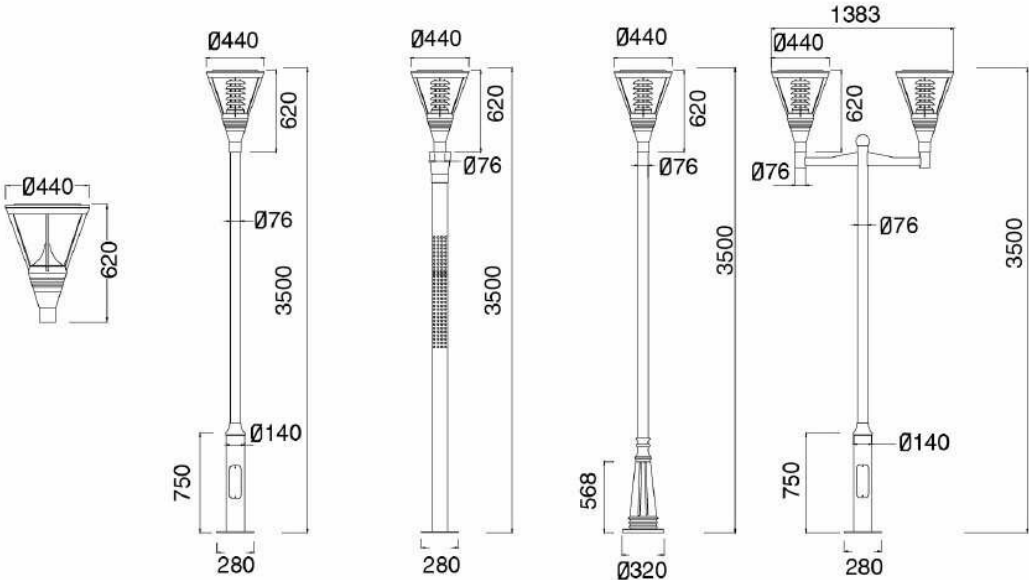

Technology Data

Cord	Power	Voltage	N.W (kg)	G.W (kg)	Packing size (mm)
AT-1113 (45)	45W	100-277	7.8	8.8	440*440*620
AT-1113 (60)	60W	100-277			

AT-1116



Description

Product description:


Die cast aluminum housing

Tempered glass mask

Sealed lamp housing


Double photometric diffuser technology

Equipped with NEMA socket

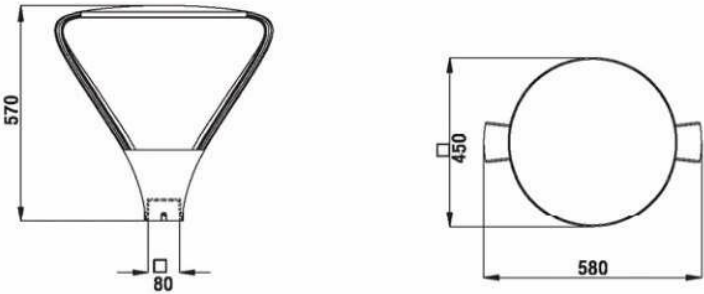

Optical Application

C Plane Distribution Diagram

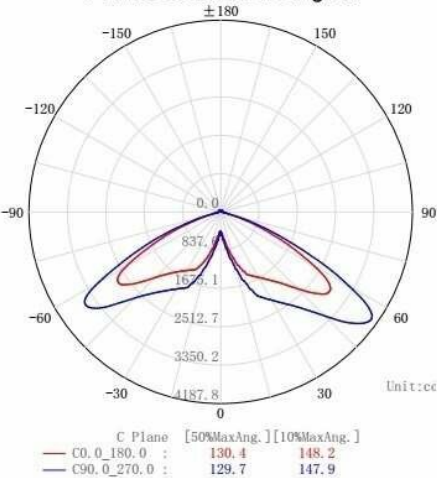

Technology Data

Cord	Power	Voltage	N.W (kg)	G.W (kg)	Packing size (mm)
AT-1116 (30)	30W	100-277	7.5	8.5	580*450*718
AT-1116 (40)	40W	100-277			
AT-1116 (60)	60W	100-277			
AT-1116 (80)	80W	100-277			
AT-1116 (100)	100W	100-277			

AT-1121



Description

Product description:

Die cast aluminum housing

Tempered glass mask


Sealed lamp housing

Double photometric diffuser technology

Equipped with NEMA socket



Optical Application



Technology Data

Cord	Power	Voltage	N.W (kg)	G.W (kg)	Packing size (mm)
AT-1121(40)	40W	100-277	9.2	10.5	590 * 590 * 145
AT-1121(60)	60W	100-277			
AT-1121(80)	80W	100-277			
AT-1121(100)	100W	100-277			
AT-1121(120)	120W	100-277			

AT-1125



Description

Product description:

Die cast aluminum housing

Tempered glass mask

Sealed lamp housing

Double photometric diffuser technology



Protection Index




AT-1128


Description

Extruded Aluminum pole

Double photometric diffuser technology

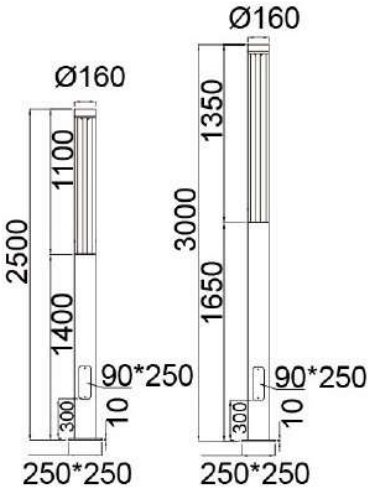

Optical Application

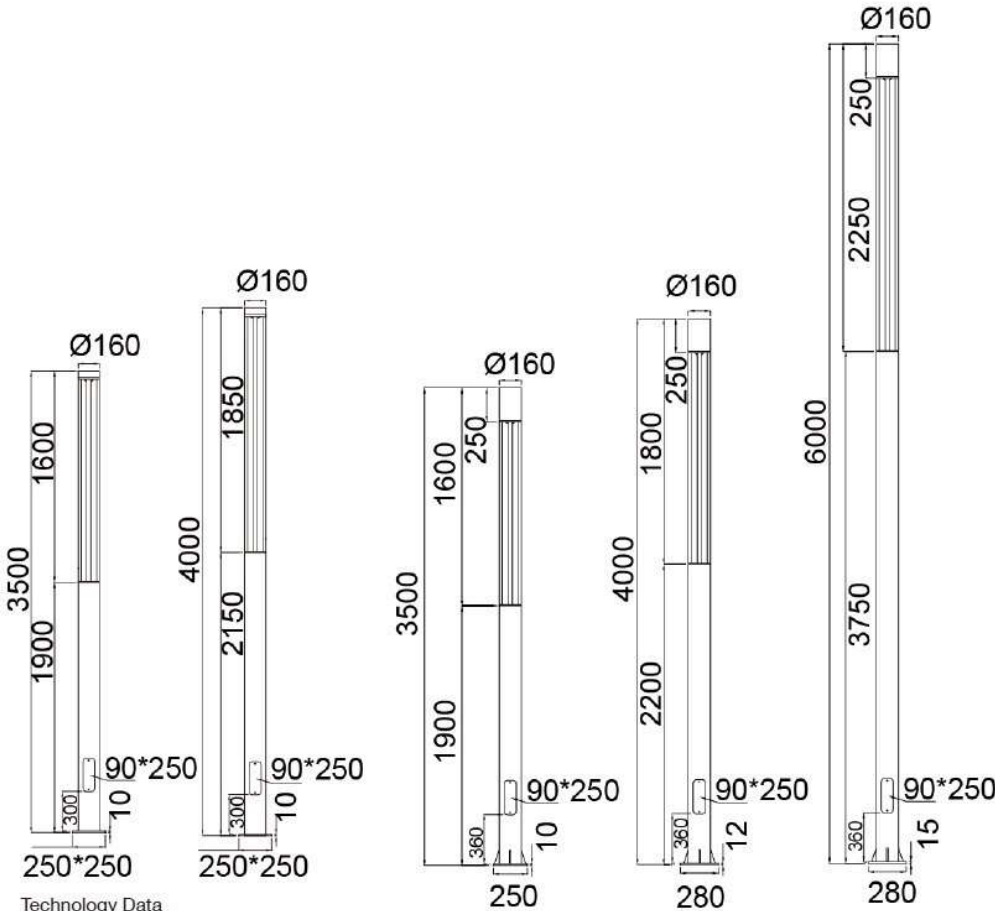

Technology Data

Cord	Power	Voltage	N.W (kg)	G.W (kg)	Packing size (mm)
AT-1128 (20)	20W	100-277	25.8	29.8	2000-6000
AT-1128 (30)	30W	100-277			
AT-1128 (40)	40W	100-277			
AT-1128 (50)	50W	100-277			

AT-1129




Description

Description:
Sanding-cast Aluminum housing
UV-stop PC lamp cover



Optical Application

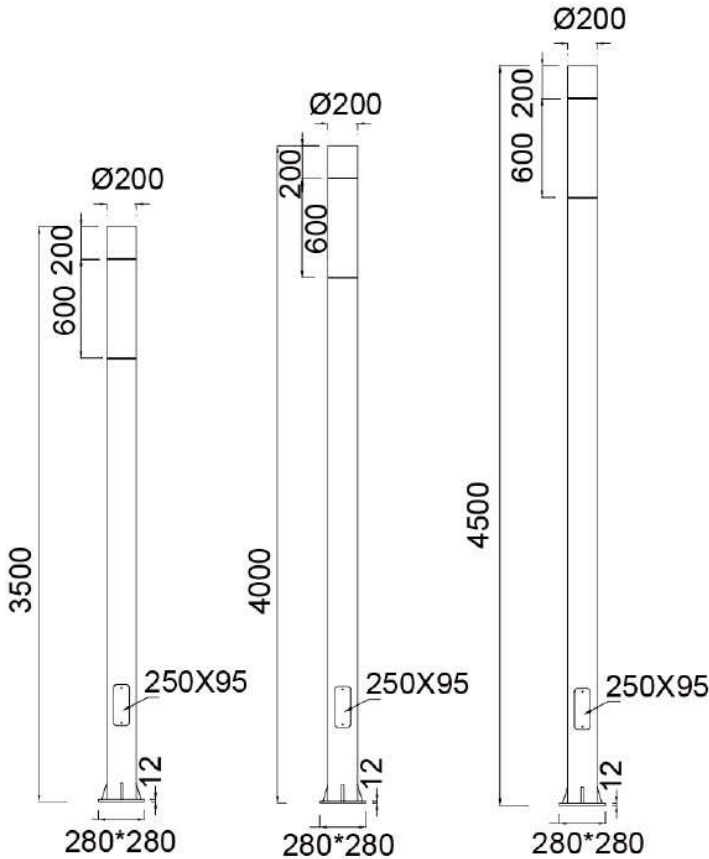

Technology Data

Cord	Power	Voltage	N.W (kg)	G.W (kg)	Packing size (mm)
AT-1129 (30)	30W	100-277	29	33	3500-4500
AT-1129 (45)	45W	100-277			

AT-1131





Description

Description:
Die-cast and sanding Aluminum housing
White Polymer plate



Optical Application

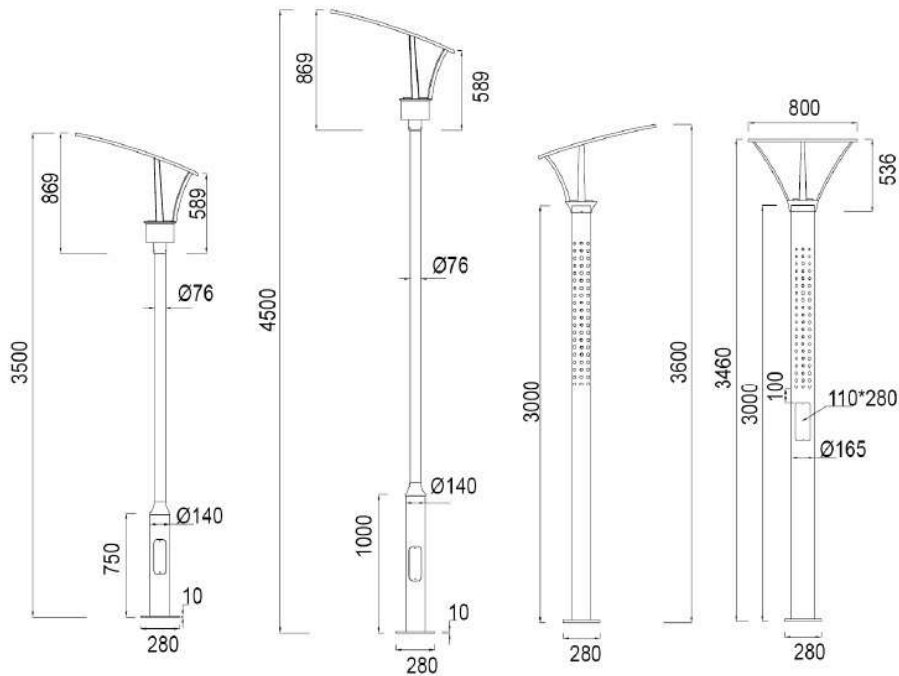

Technology Data


Cord	Power	Voltage	N.W (kg)	G.W (kg)	Packing size (mm)
AT-1131 (30)	30W	100-277	27.8	30.8	3500-4500
AT-1131 (40)	40W	100-277			
AT-1131 (50)	50W	100-277			

AT-1136



Description

Extruded Aluminum pole
Double photometric diffuser technology

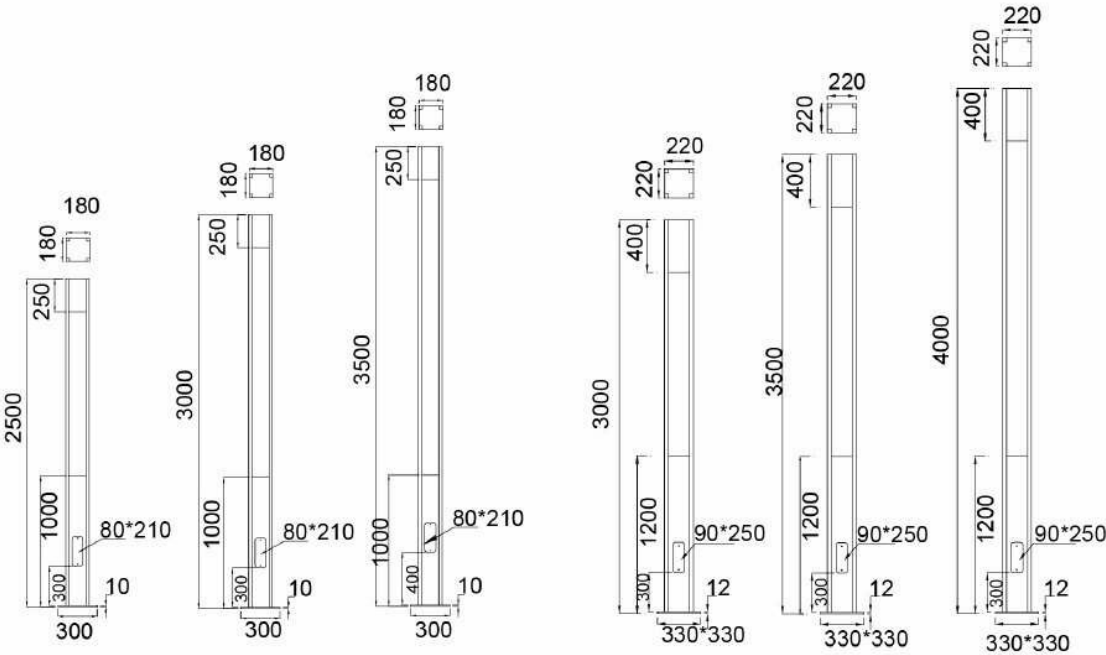


Cord	Power	Voltage	N.W (kg)	G.W (kg)	Packing size (mm)
AT-1136 (20)	20W	100-277	39.9	43.9	300*300*3600-6000
AT-1136 (30)	30W	100-277			
AT-1136 (40)	40W	100-277			
AT-1136 (50)	50W	100-277			
AT-1136 (60)	60W	100-277			

AT-1137

Description

Extruded Aluminum pole

Double photometric diffuser technology

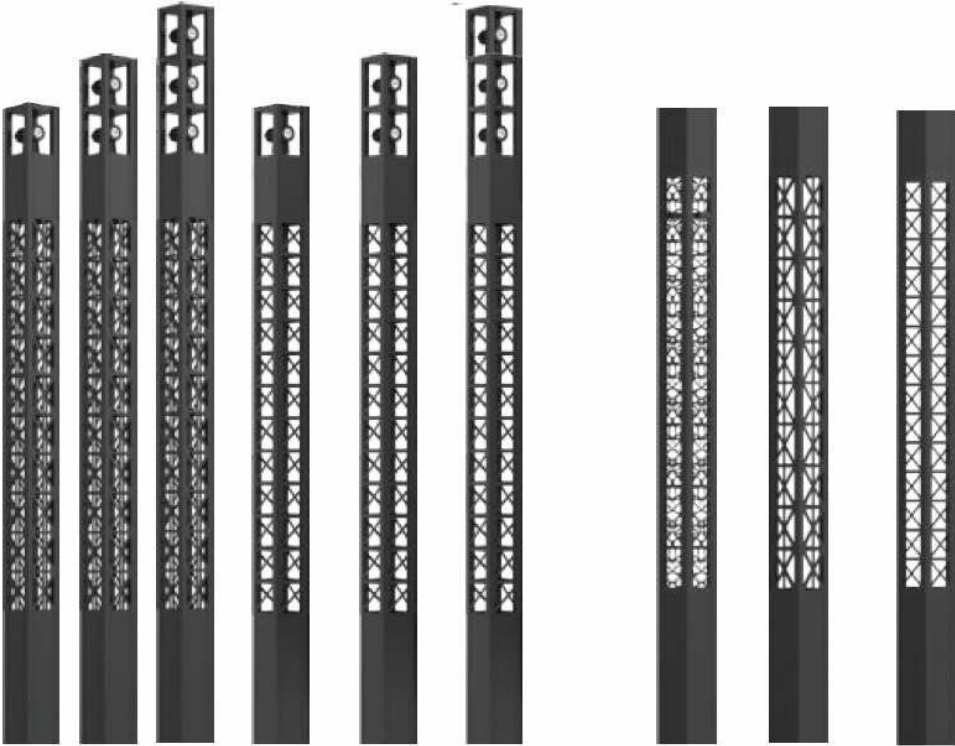

Optical Application



Cord	Power	Voltage	High
AT-1137 (20)	20W	100-277	100-8000mm
AT-1137 (30)	30W	100-277	
AT-1137 (40)	40W	100-277	
AT-1137 (50)	50W	100-277	
AT-1137 (60)	60W	100-277	
AT-1137 (80)	80W	100-277	

AT-1139




Description

Extruded Aluminum pole

Double photometric diffuser technology

UV-stop PC lamp cover

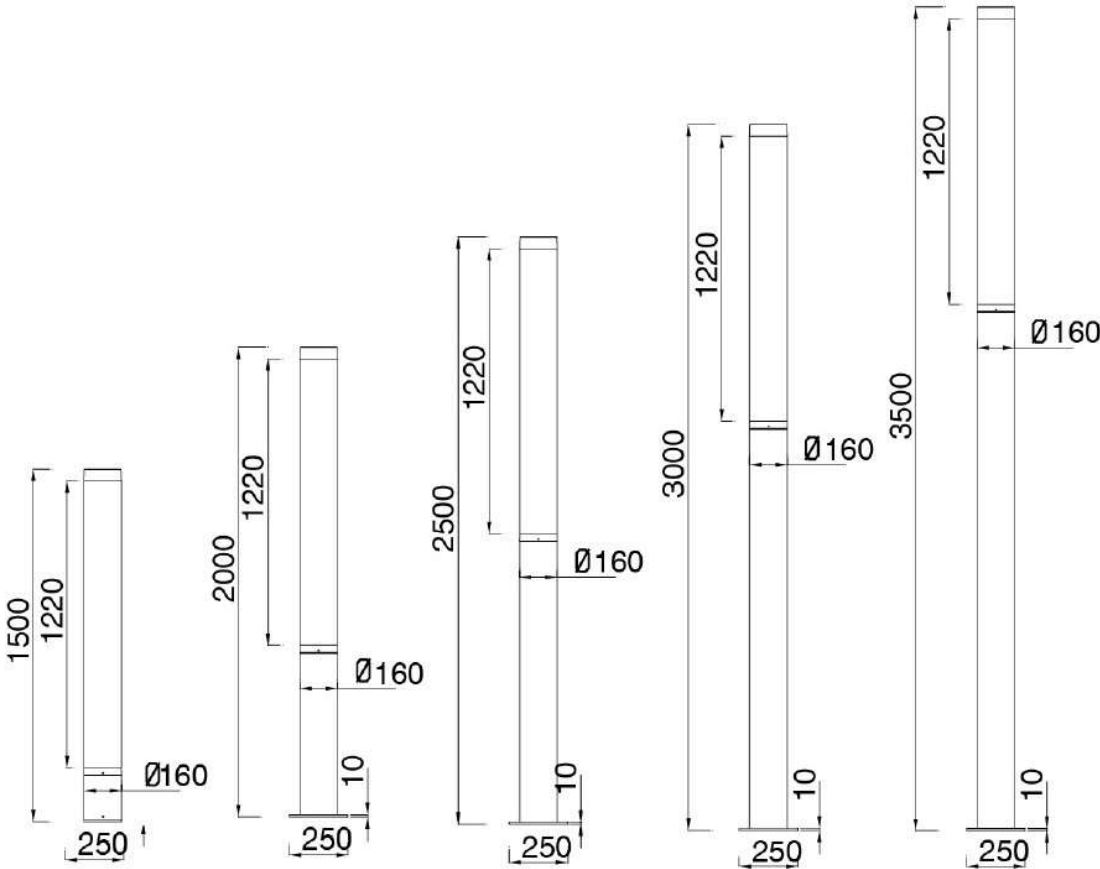

Technology Data

Cord	Power	Voltage	N.W (kg)	G.W (kg)	Packing size (mm)
AT-1139 (36)	36W	100-277	22.5	25.5	1500-3500-

AT-1140



Description

Product description:


Die-cast Aluminum housing;

Spinning Aluminum Top Cover

UV-stop PC lamp cover



Optical Application

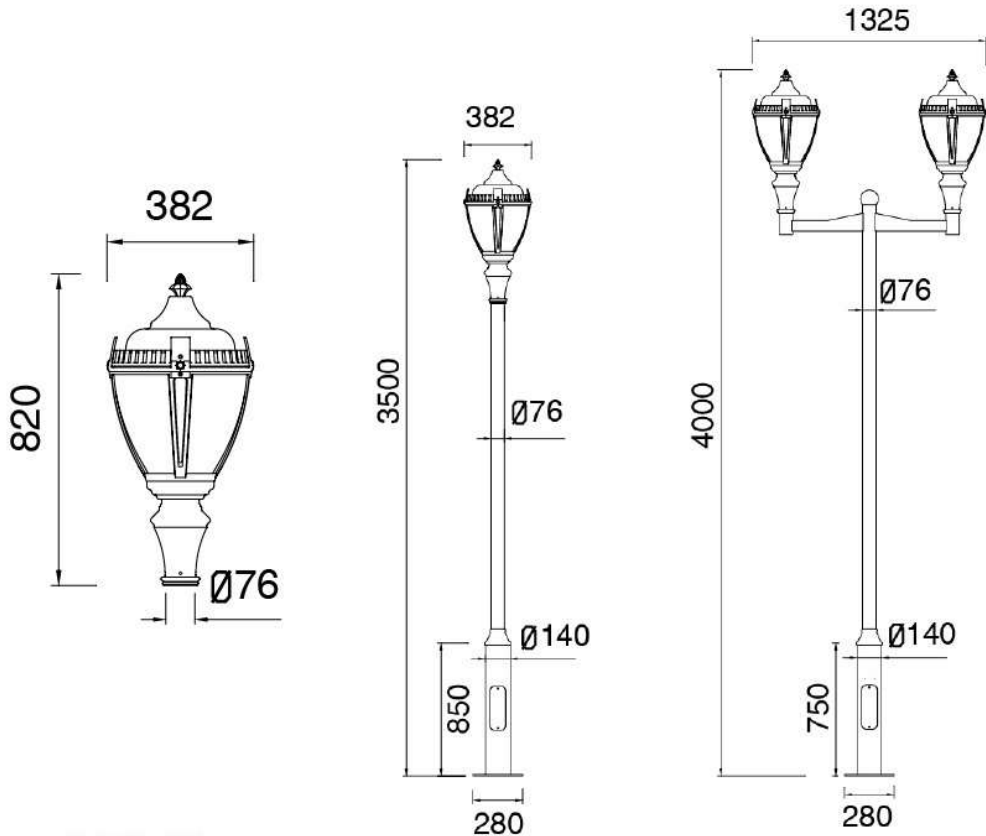

Technology Data

Cord	Power	Voltage	N.W (kg)	G.W (kg)	Packing size (mm)
AT-1140 (25)	25W	100-277	9.8	10.8	435*435*675
AT-1140 (35)	35W	100-277			
AT-1140 (60)	60W	100-277			

AT-1141



Description

Product description:


Die-cast Aluminum housing;

Spinning Aluminum Top Cover

UV-stop PC lamp cover



Optical Application

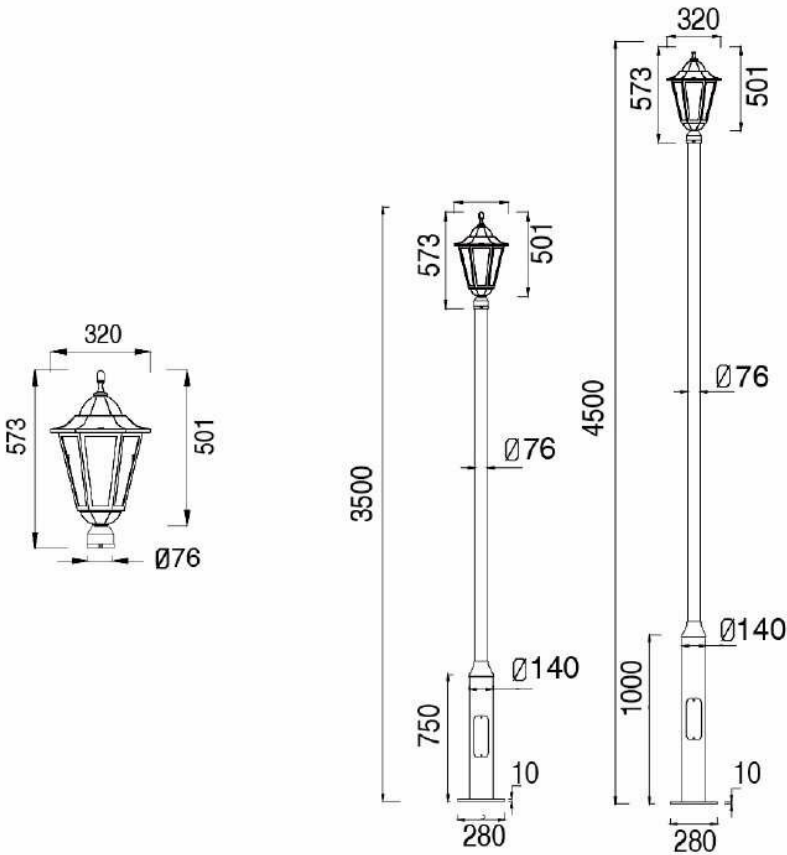

Technology Data

Cord	Power	Voltage	N.W (kg)	G.W (kg)	Packing size (mm)
AT-1141 (25)	25W	100-277	9.5	10.5	320*320*573
AT-1141 (35)	35W	100-277			
AT-1141 (60)	60W	100-277			









AT-1155



Description

Extruded Aluminum pole

Double photometric diffuser technology

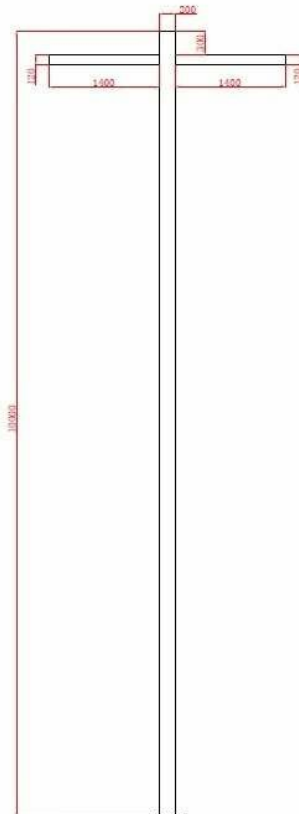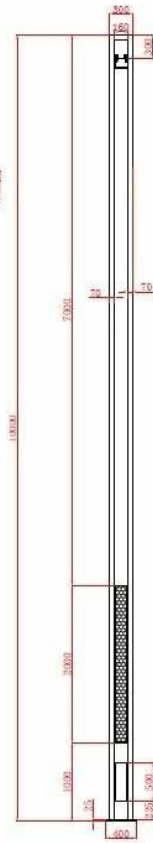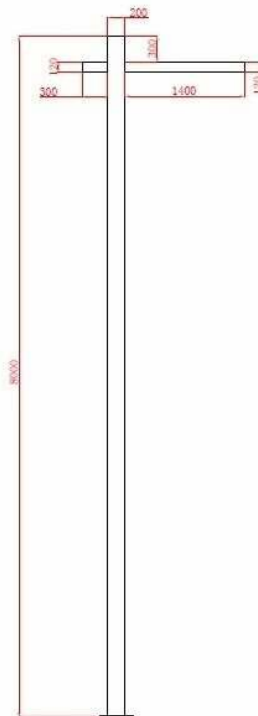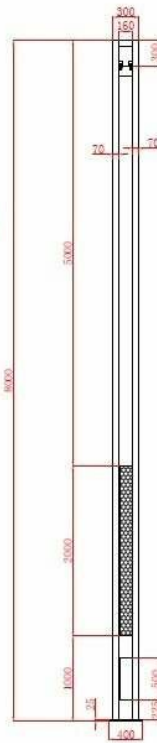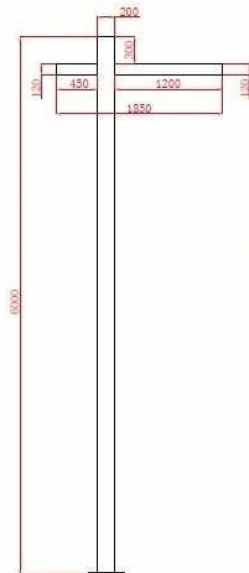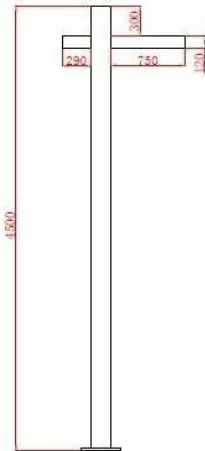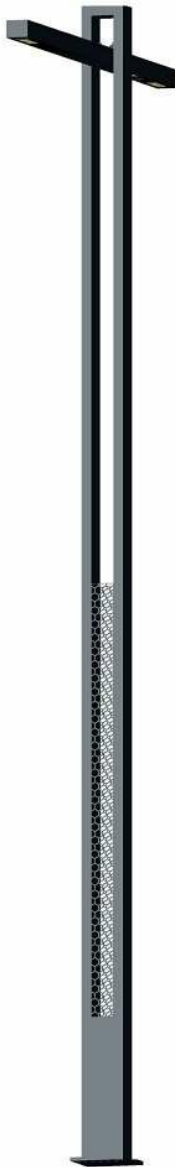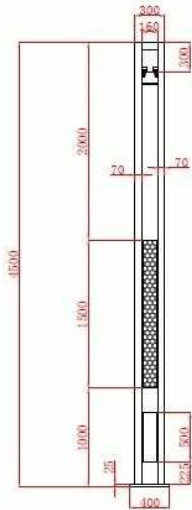








AT-1156



Description

Extruded Aluminum pole

Double photometric diffuser technology

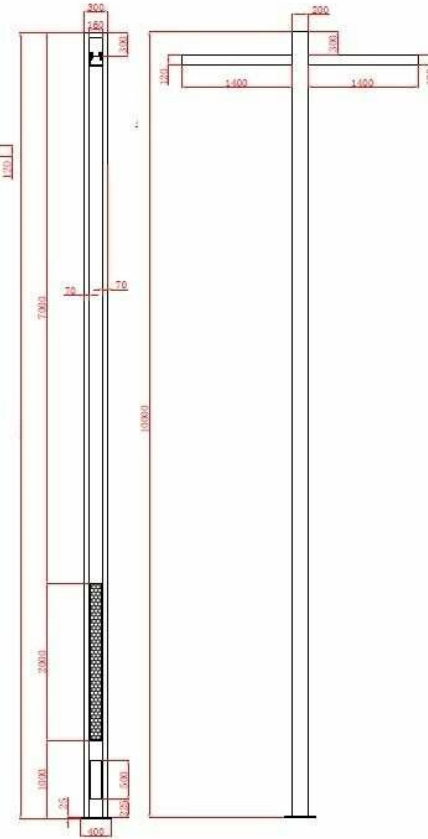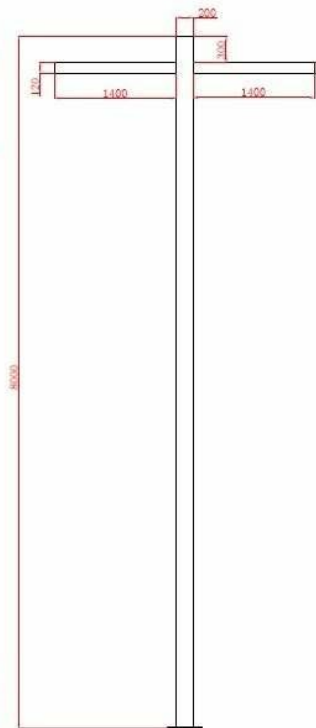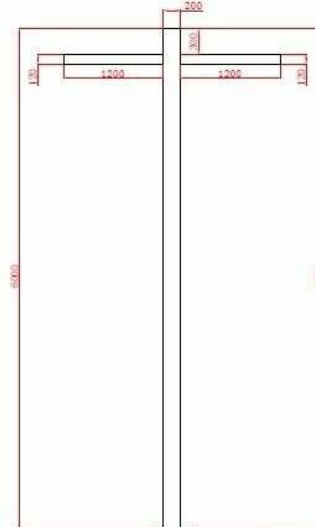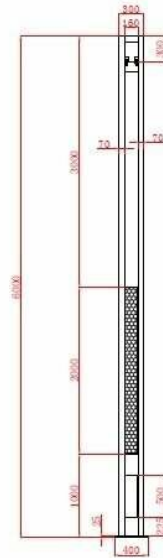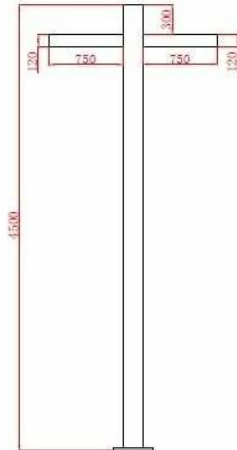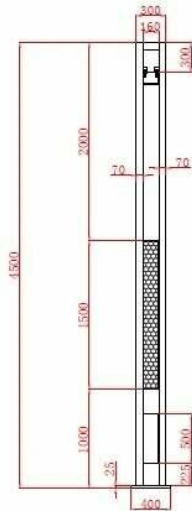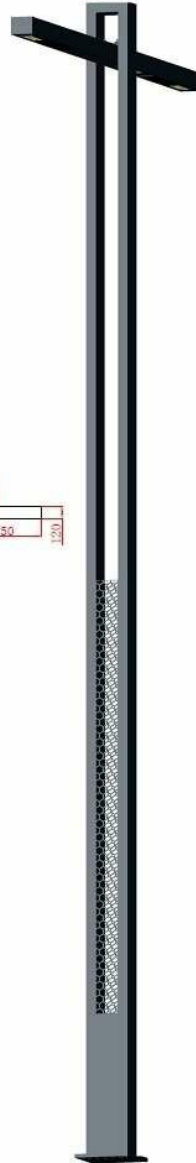

AT-1158



Description

Product description:


Die cast aluminum housing

Tempered glass mask

Sealed lamp housing

Double photometric diffuser technology

Equipped with NEMA socket

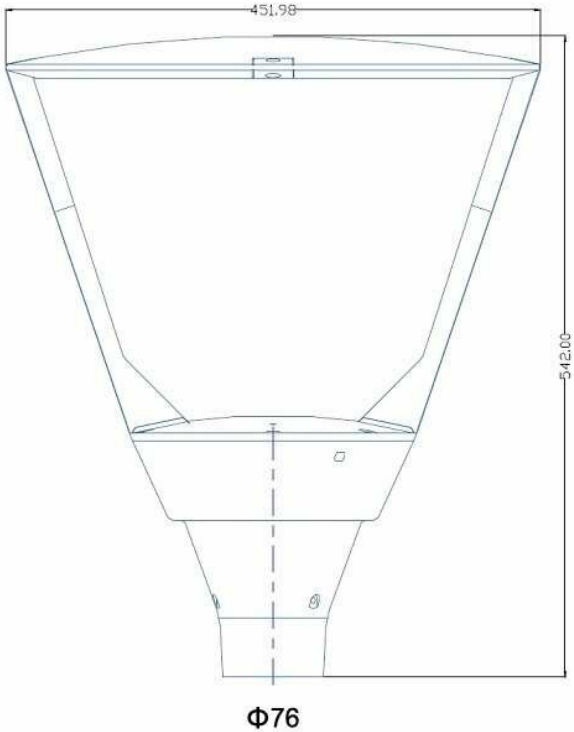

Cord	Power	Voltage	N.W (kg)	G.W (kg)	Packing size (mm)
AT-1158 (30)	30W	100-277	8.5	9.7	510*505*595
AT-1158 (40)	40W	100-277			
AT-1158 (60)	60W	100-277			
AT-1158 (80)	80W	100-277			
AT-1158 (100)	100W	100-277			

AT-1163



Description

Product description:


Die cast aluminum housing

Tempered glass mask

Sealed lamp housing

Double photometric diffuser technology

Equipped with NEMA socket

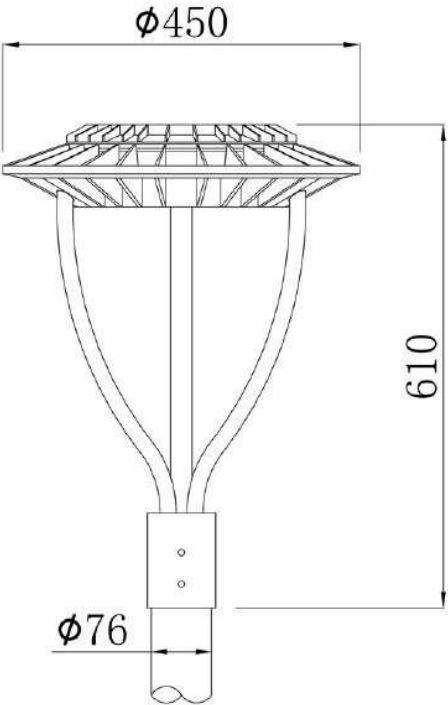




Cord	Power	Voltage	N.W (kg)	G.W (kg)	Packing size (mm)
AT-1163 (30)	30W	100-277	6.9	7.9	450*450*610
AT-1163 (40)	40W	100-277			
AT-1163 (60)	60W	100-277			

AT-1168

Description

Extruded Aluminum pole

Double photometric diffuser technology

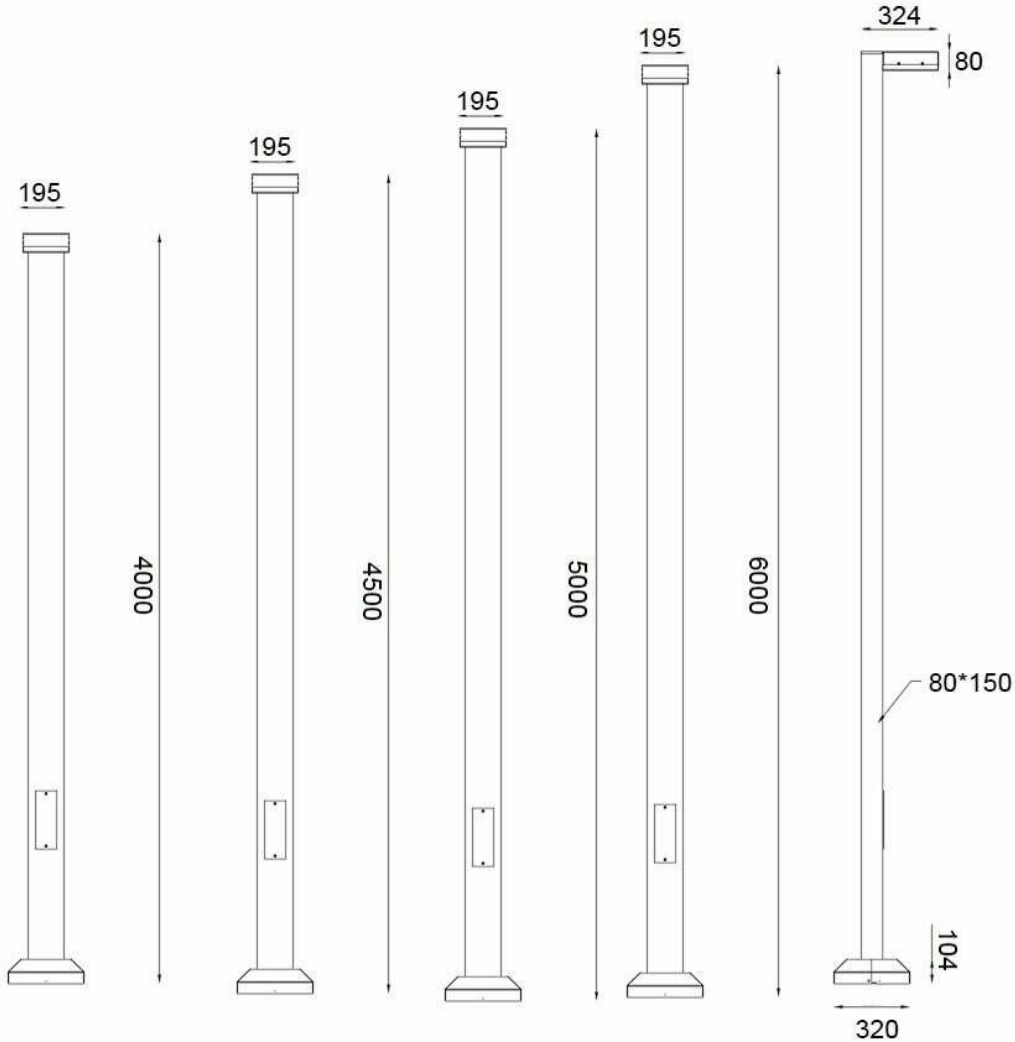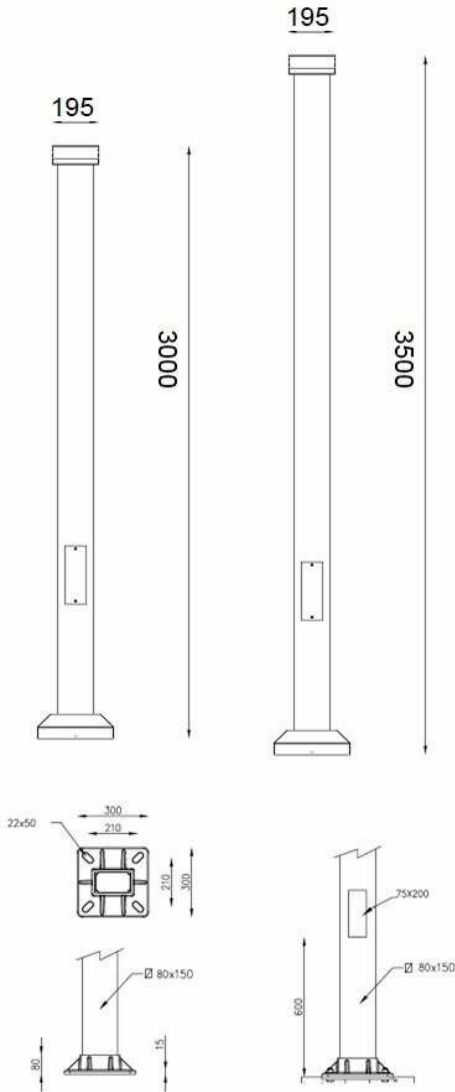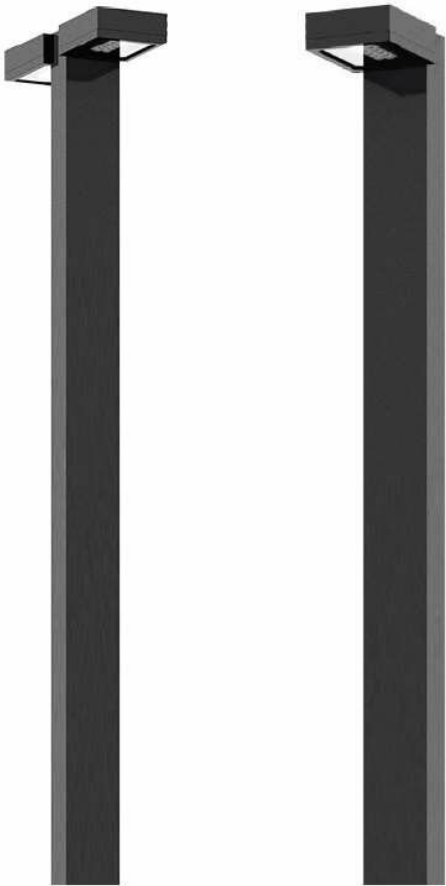

Technology Data

Cord	Power	Voltage	N.W (kg)	G.W (kg)	Packing size (mm)
AT-1168	20-60W	100-277	29.9	30.9	80*150- 3000-6000

AT-1172



Description

Product description:


Die cast aluminum housing

Tempered glass mask

Sealed lamp housing

Double photometric diffuser technology

Equipped with NEMA socket

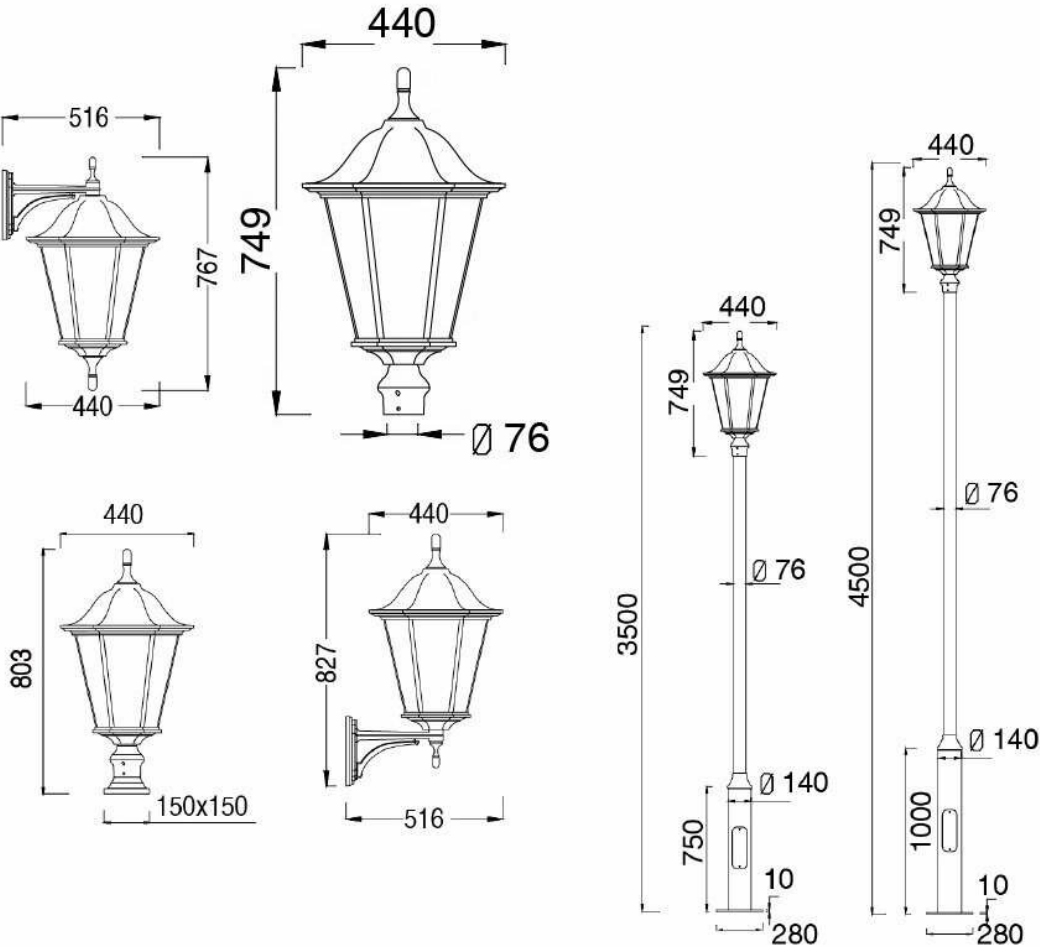

Technology Data

Cord	Power	Voltage	N.W (kg)	G.W (kg)	Packing size (mm)
AT-1172 (30)	30W	100-277	9.9	10.9	440*440*749
AT-1172 (45)	45W	100-277			
AT-1172 (60)	60W	100-277			

AT-1173



Description

Product description:


Die cast aluminum housing

Tempered glass mask

Sealed lamp housing

Double photometric diffuser technology

Equipped with NEMA socket

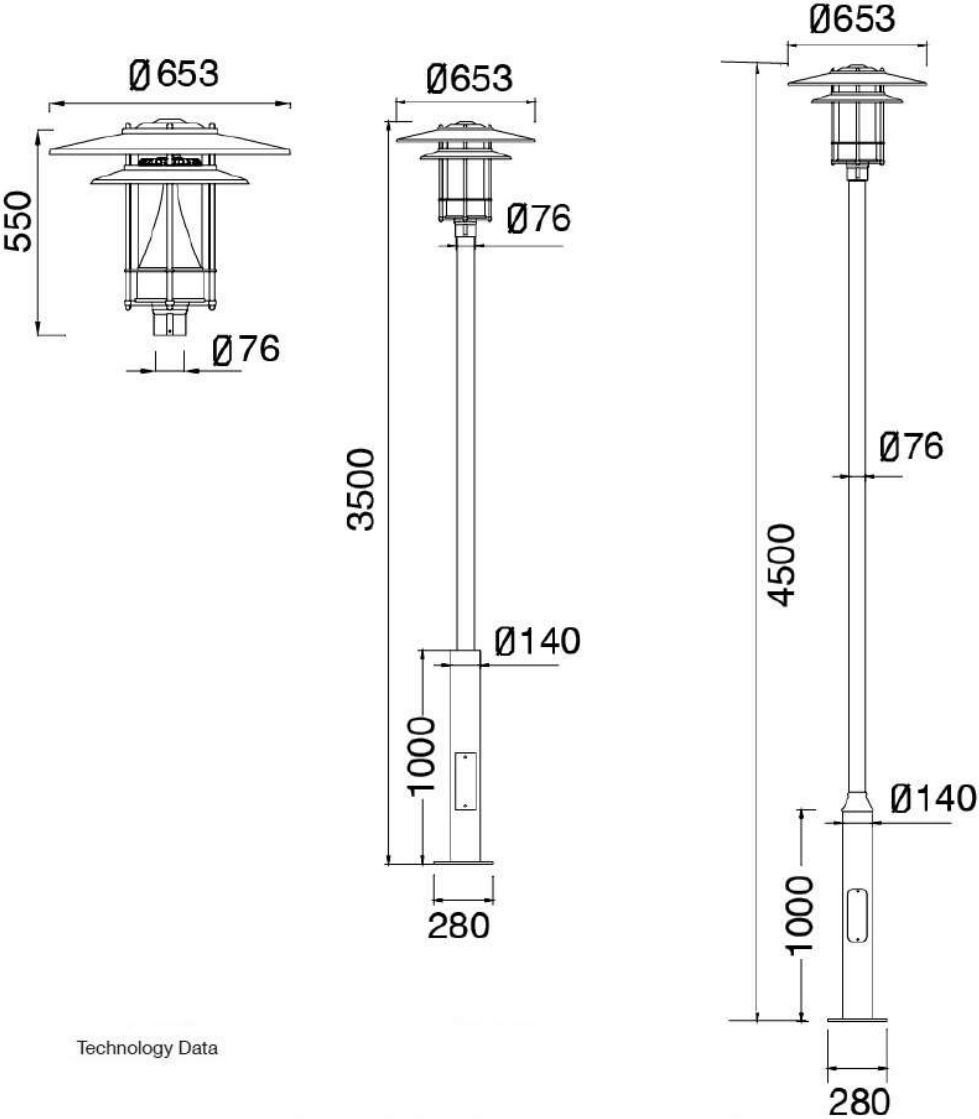

Technology Data

Cord	Power	Voltage	N.W (kg)	G.W (kg)	Packing size (mm)
AT-1173 (25)	25W	100-277	9.7	10.7	653*653*550
AT-1173 (35)	35W	100-277			
AT-1173 (60)	60W	100-277			

AT-1175






Description

Product description:
Die cast aluminum housing
Optical grade PMMA lamp shades
Sealed lamp housing
Double photometric diffuser technology
Equipped with NEMA socket



Optical Application

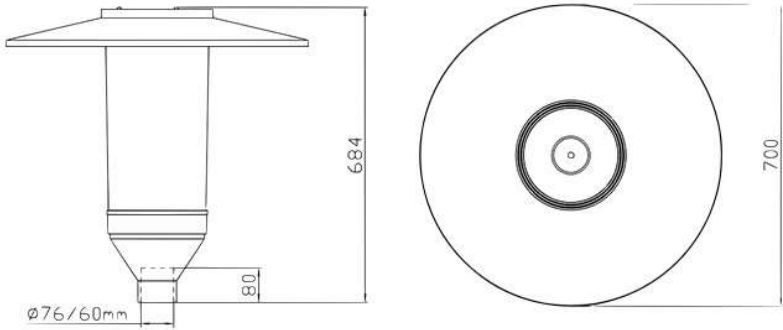

Technology Data

Cord	Power	Voltage	N.W (kg)	G.W (kg)	Packing size (mm)
AT-1175 (30)	30W	100-277	8.8	9.8	700*700*684
AT-1175 (60)	60W	100-277			

AT-1176








Description

Product description:
Die cast aluminum housing
Optical grade PMMA lamp shades
Sealed lamp housing
Double photometric diffuser technology
Equipped with NEMA socket



Optical Application

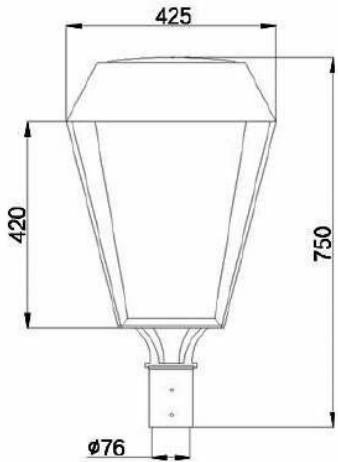

Technology Data

Cord	Power	Voltage	N.W (kg)	G.W (kg)	Packing size (mm)
AT-1176 (30)	30W	100-277	11.8	12.8	440*440*780
AT-1176 (40)	40W	100-277			
AT-1176 (60)	60W	100-277			
AT-1176 (80)	80W	100-277			
AT-1176 (100)	100W	100-277			

AT-1177








Description

Product description:
Die cast aluminum housing
Optical grade PMMA lamp shades
Sealed lamp housing
Double photometric diffuser technology
Equipped with NEMA socket



Optical Application

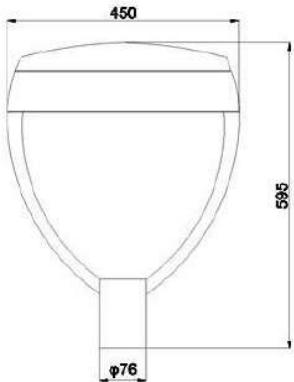

Technology Data

Cord	Power	Voltage	N.W (kg)	G.W (kg)	Packing size (mm)
AT-1177 (30)	30W	100-277	10.8	11.8	470*470*610
AT-1177 (40)	40W	100-277			
AT-1177 (60)	60W	100-277			
AT-1177 (80)	80W	100-277			
AT-1177 (100)	100W	100-277			

AT-1178








Description

Product description:
Die cast aluminum housing
Optical grade PMMA lamp shades
Sealed lamp housing
Double photometric diffuser technology
Equipped with NEMA socket



Optical Application

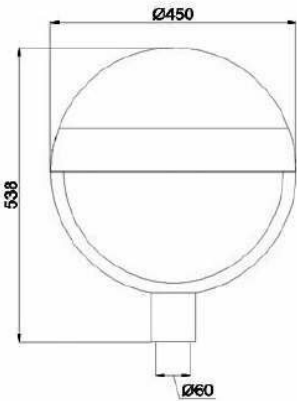




Technology Data

Cord	Power	Voltage	N.W (kg)	G.W (kg)	Packing size (mm)
AT-1178 (30)	30W	100-277	10.8	11.8	470*470*550
AT-1178 (40)	40W	100-277			
AT-1178 (60)	60W	100-277			
AT-1178 (80)	80W	100-277			
AT-1178 (100)	100W	100-277			

AT-1182

Description

Product description:
Die cast aluminum housing
Tempered glass mask

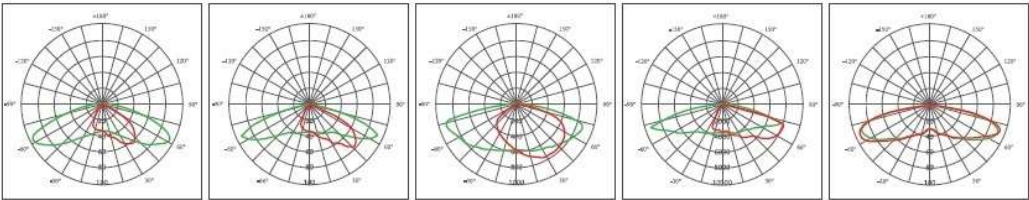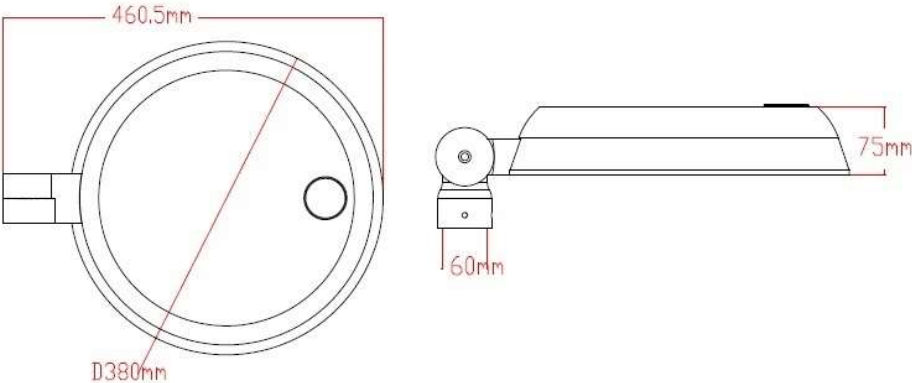

Type2-M Type3-S Type3-M Type4-M Type5-M


Technology Data

Cord	Power	Voltage	N.W (kg)	G.W (kg)	Packing size (mm)
AT-1182 (20)	20W	100-277	5.5	6.5	320 * 320 * 500
AT-1182 (30)	30W	100-277			
AT-1182 (40)	40W	100-277			
AT-1182 (50)	50W	100-277			
AT-1182 (60)	60W	100-277	7.5	8.5	380 * 380 * 560
AT-1182 (80)	80W	100-277			
AT-1182 (100)	100W	100-277			


AT-1194

Description

Product description:
Die cast aluminum housing
Tempered glass mask
Sealed lamp housing
Double photometric diffuser technology
Equipped with NEMA socket




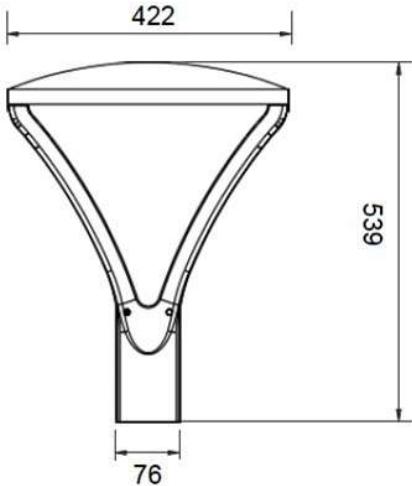






Optical Application

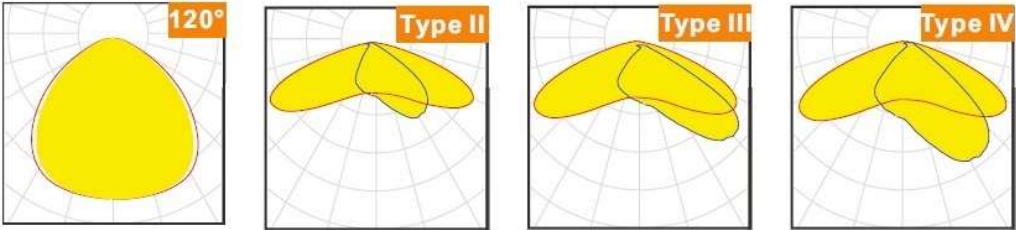

Technology Data

Cord	Power	Voltage	N.W (kg)	G.W (kg)	Packing size (mm)
AT-1194 (30)	30W	100-277	8.8	9.8	422*422*539
AT-1194 (40)	40W	100-277			
AT-1194 (60)	60W	100-277			
AT-1194 (90)	90W	100-277			

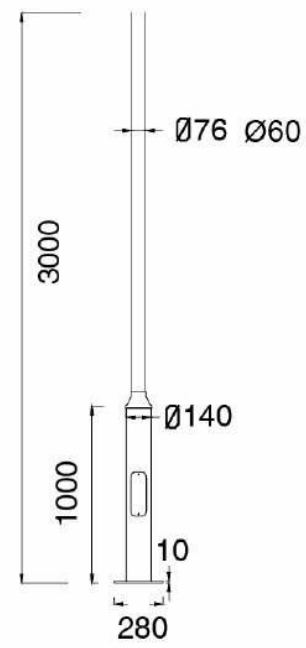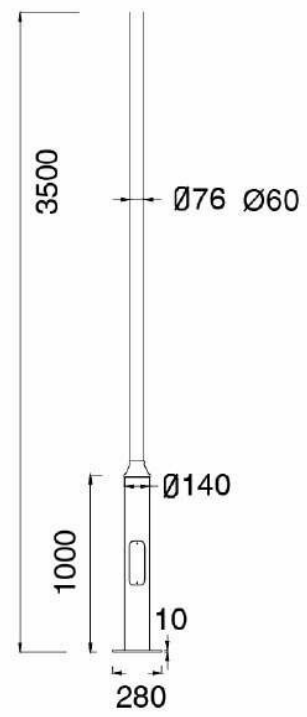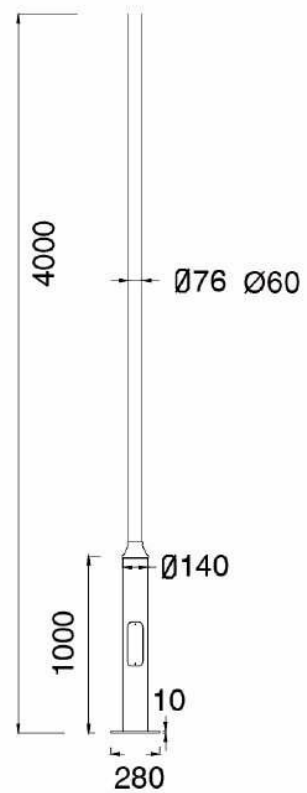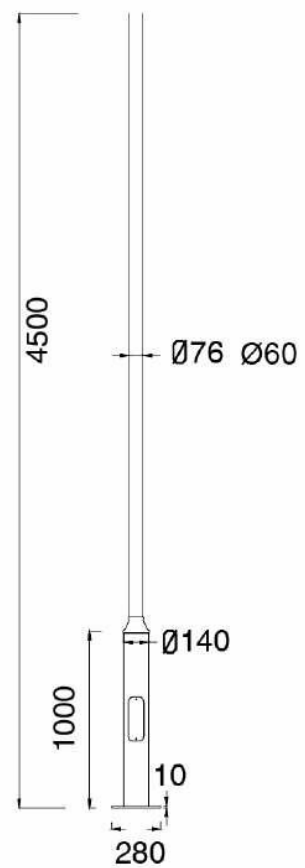

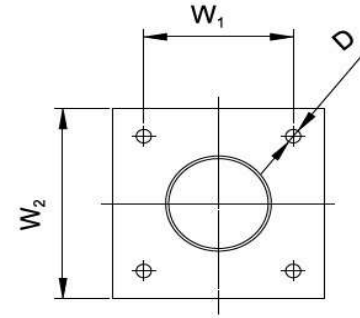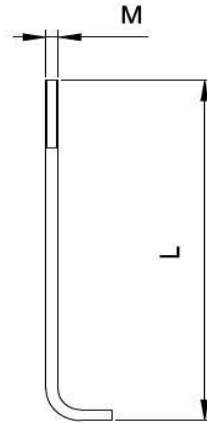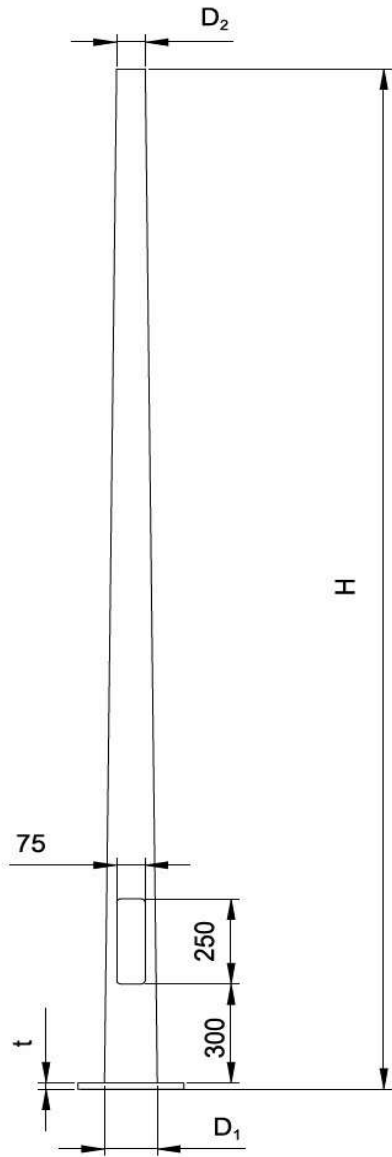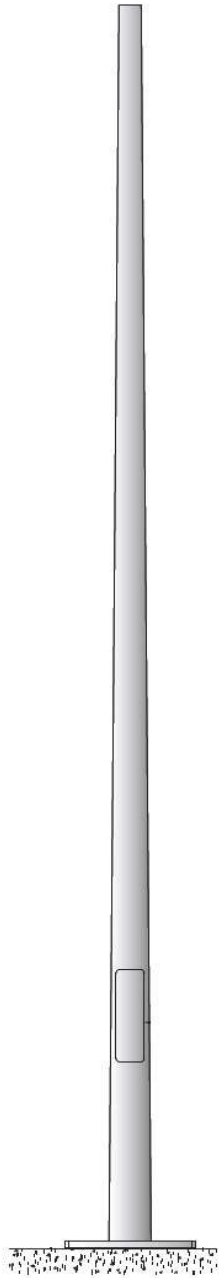

H	D ₁	D ₂	W ₁	W ₂	t	D	L	M	Weight
4000	118	60	198	280	12	20	500	16	34.3
4000	134	76	198	280	12	20	500	16	39
5000	130	60	198	280	12	20	500	16	43.2
5000	146	76	198	280	12	20	500	16	49.1
6000	142	60	198	280	14	22	600	18	53
6000	158	76	198	280	14	22	600	18	60.1
7000	154	60	198	280	14	22	600	18	63.8
7000	170	76	198	280	14	22	600	18	72