

INNOVATIVE LIGHTING



FLEXIBLE LED STRIP SERIES

FLEXIBLE LED STRIP SERIES



P1

General Information:

- ◆ FLEXIBLE LED STRIP SERIES works at low voltage(DC 12V or 24V), Super Bright SMD LED mounted on flexible PCB.
- ◆ We can offer single colors, such as warm white, natural white, cool white, red, green, yellow, orange, blue, pink, purple. Besides, a few kinds of RGB and RGBW strips are available as well as controllers.
- ◆ Clips and self-adhere 3M tape are used for fast installation.
- ◆ Our Flexible LED strips series get reputation of strong, good color repeating, full series.

Applications:

- ◆ Border or perimeter lighting.
- ◆ Architectural decorative lighting.
- ◆ Back lighting.
- ◆ Use indoor and outdoor(Silicon Resin Dropping; Silicon Resin Filling Into Half Silicon Tube; Silicon Resin Filling Into Silicon Tube etc).
- ◆ Use in highlight areas.
- ◆ Concealed lighting.
- ◆ Cove and under cabinet lighting.
- ◆ Lighting tube.



Features:

- ◆ Available in 12 or 24 volt.
- ◆ Super Bright 2216, 3014, 3528, 2835, 335, 5025, 5050, 5730 SMD LEDs.
- ◆ High brightness & low power consumption.
- ◆ RGB, RGBW Color changing available.
- ◆ Can be cut to intervals at marked point and rejoined by electricians.
- ◆ Long life span LED lights, more than 50,000 hours+.
- ◆ Operating temperature: -20~50°C.
- ◆ Replace traditional neon, easy to shape.
- ◆ High color rendering index is available.

P2

WATERPROOF GRADE



IP20
(Non-waterproof)



IP54
(Silicon Resin Dropping)

Waterproof Grade



IP67
(Silicon Resin Filling Into Half Silicon Tube)



IP68
(Silicon Resin Filling Into Silicon Tube)




FLEXIBLE LED STRIP SERIES

2216 Single Color 280LED/Meter



Features:

- 1, LED Type: SMD 2216
- 2, High brightness & low power consumption.
- 3, CRI90-95 SMD LED.
- 4, Long life span LED lights, more than 50,000 hours+.
- 5, Operating temperature: -20~50°C.
- 6, Dimmable to 6V DC.
- 7, Adhesive back, peel & stick!

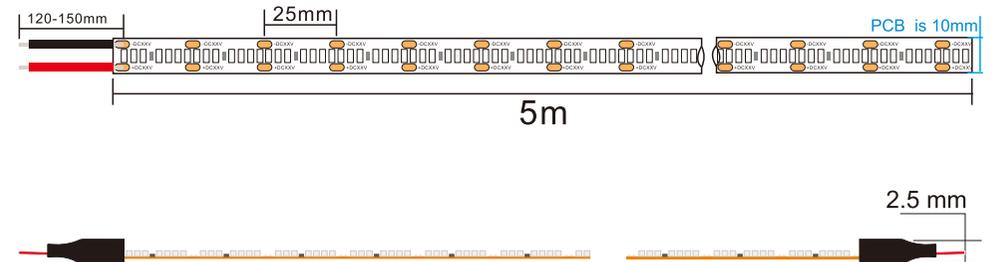

✂ Said the cutting area. All LED's view angle is 120°.

SMD2216, 280LED/meter

Part Number	Size	Color	Cut every (LEDS)	LED Qty/M	Lumen/M	Voltage	Power/m	Packing/m
2216FWW280	L5000*W10*H3	WW ■	7	280	1400	24V	19.2W	5 Meters/reel
2216FNW280		NW ■			1680			
2216FCW280		CW ■			1960			


FLEXIBLE LED STRIP SERIES

2835 Single Color 60LED/Meter



Features:

- 1, LED Type: SMD 2835
- 2, High brightness & low power consumption.
- 3, CRI80 SMD LED.
- 4, Long life span LED lights, more than 50,000 hours+.
- 5, Operating temperature: -20~50°C.
- 6, Dimmable to 6V DC.
- 7, Adhesive back, peel & stick!
- 8, IP20, IP54, IP67 and IP68 waterproof are all available.

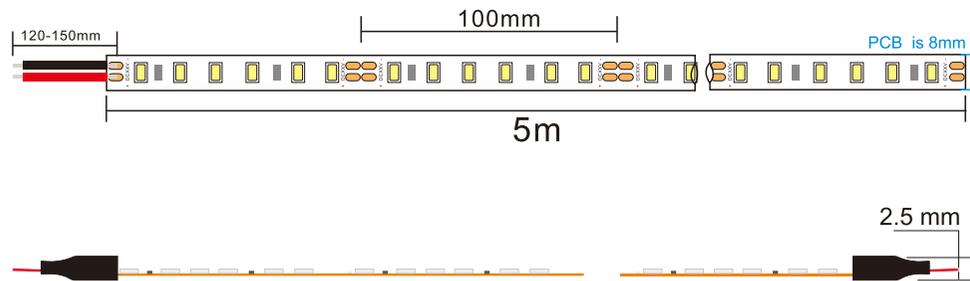

✂ Said the cutting area. All LED's view angle is 120°.

SMD2835,60LED/meter								
Part Number	Size	Color	Cut every (LEDS)	LED Qty/M	Lumen/M	Voltage	Power/m	Packing/m
2835FWW60	L5000*W8*H3	WW ■	6	60	1080	12/24V	14.4W	5 Meters/reel
2835FNW60		NW ■			1140			
2835FCW60		CW ■			1200			


FLEXIBLE LED STRIP SERIES

2835 Single Color 120LED/Meter



Features:

- 1, LED Type: SMD 2835.
- 2, High brightness & low power consumption.
- 3, CRI80 SMD LED.
- 4, Long life span LED lights, more than 50,000 hours+.
- 5, Operating temperature: -20~50°C.
- 6, Dimmable to 6V DC.
- 7, Adhesive back, peel & stick!
- 8, IP20, IP54, IP67 and IP68 waterproof are all available.

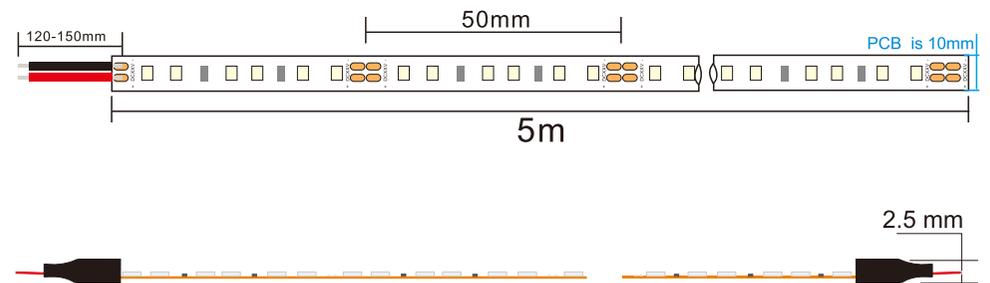

✂ Said the cutting area. All LED's view angle is 120°.

SMD2835,120LED/meter									
Part Number	Size	Color	Cut every (LEDS)	LED Qty/M	Lumen/M	Voltage	Power/m	Packing/m	
2835FWW120	L5000*W10*H3 or L5000*W12*H3	WW ■	6	120	1350	12/24V	14.4W	5 Meters/reel	
2835FNW120		NW ■			1470				
2835FCW120		CW ■			1600				


FLEXIBLE LED STRIP SERIES

2835 Color temperature adjustable



Features:

- 1, LED Type: SMD 2835.
- 2, High brightness & low power consumption.
- 3, CRI80 SMD LED.
- 4, Long life span LED lights, more than 50,000 hours+.
- 5, Operating temperature: -20~50°C.
- 6, Dimmable to 6V DC.
- 7, Adhesive back, peel & stick!
- 8, IP20, IP54, IP67 and IP68 waterproof are all available.

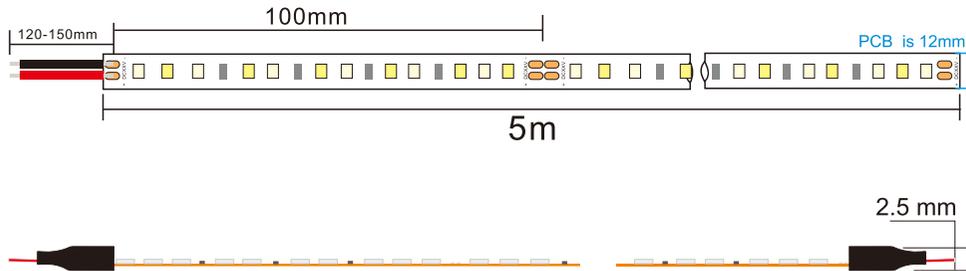

✂ Said the cutting area. All LED's view angle is 120°.

SMD2835, 120LED/meter, Dual color.

Part Number	Size	Color	Cut every (LEDS)	LED Qty/M	Lumen/M	Voltage	Power/m	Packing/m
2835FWW+CW120	L5000*W10*H3	WW+CW	12	120	800-1400	24V	21W	5 Meters/reel


FLEXIBLE LED STRIP SERIES

3014 Single Color 60LED/Meter



Features:

- 1, LED Type: SMD 3014
- 2, High brightness & low power consumption.
- 3, CRI80 SMD LED.
- 4, Long life span LED lights, more than 50,000 hours+.
- 5, Operating temperature: -20~50°C.
- 6, Dimmable to 6V DC.
- 7, Adhesive back, peel & stick!
- 8, IP20, IP54, IP67 and IP68 waterproof are all available.

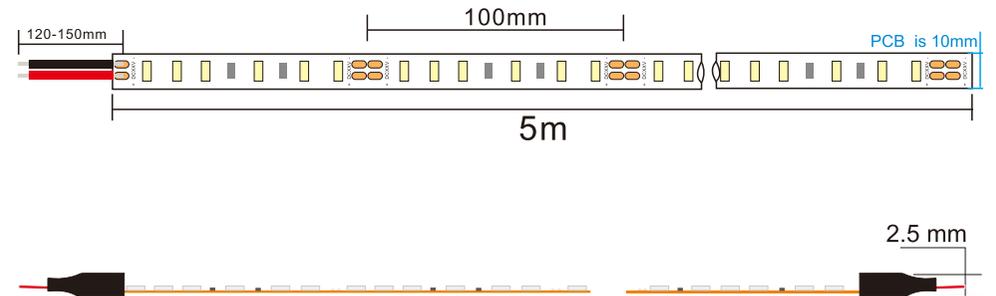

✂ Said the cutting area. All LED's view angle is 120°.

SMD3014, 60LED/meter

Part Number	Size	Color	Cut every (LEDS)	LED Qty/M	Lumen/M	Voltage	Power/m	Packing/m
3014FWW60	L5000*W10*H3	WW ■	6	60	600	12/24V	7.2W	5 Meters/reel
3014FNW60		NW ■			660			
3014FCW60		CW ■			700			


FLEXIBLE LED STRIP SERIES

3014 Single Color 120LED/Meter



Features:

- 1, LED Type: SMD 3014
- 2, High brightness & low power consumption.
- 3, CRI80 SMD LED.
- 4, Long life span LED lights, more than 50,000 hours+.
- 5, Operating temperature: -20~50°C.
- 6, Dimmable to 6V DC.
- 7, Adhesive back, peel & stick!
- 8, IP20, IP54, IP67 and IP68 waterproof are all available.

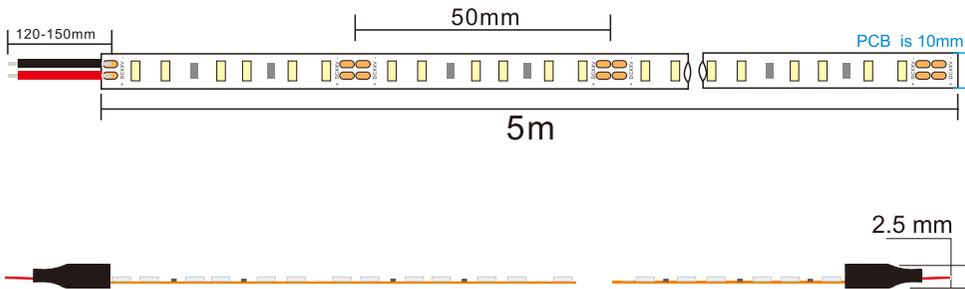

✂ Said the cutting area. All LED's view angle is 120°.

SMD3014,120LED/meter								
Part Number	Size	Color	Cut every (LEDS)	LED Qty/M	Lumen/M	Voltage	Power/m	Packing/m
3014FWW120	L5000*W10*H3	WW ■	6	120	1200	12/24V	14.4W	5 Meters/reel
3014FNW120		NW ■			1320			
3014FCW120		CW ■			1440			


FLEXIBLE LED STRIP SERIES

3014 Single Color 204LED/Meter



Features:

- 1, LED Type: SMD 3014
- 2, High brightness & low power consumption.
- 3, CRI80 SMD LED.
- 4, Long life span LED lights, more than 50,000 hours+.
- 5, Operating temperature: -20~50°C.
- 6, Dimmable to 6V DC.
- 7, Adhesive back, peel & stick!

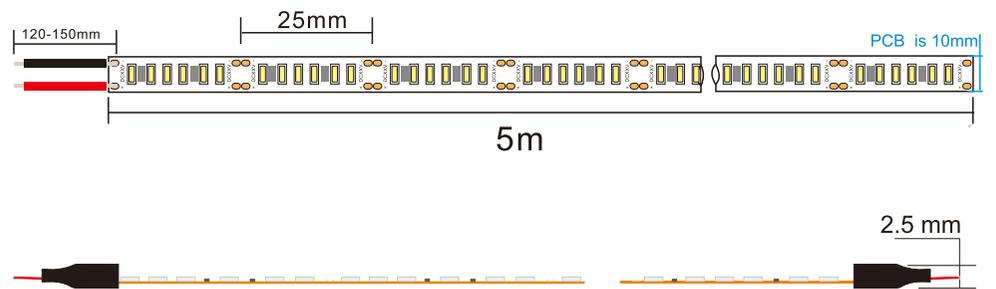

✂ Said the cutting area. All LED's view angle is 120°.

SMD3014,204LED/meter								
Part Number	Size	Color	Cut every (LEDS)	LED Qty/M	Lumen/M	Voltage	Power/m	Packing/m
3014FWW204	L5000*W10*H3	WW ■	6	204	1800	24V	21W	5 Meters/reel
3014FNW204		NW ■			1960			
3014FCW204		CW ■			2100			


FLEXIBLE LED STRIP SERIES

3527 Dual Color, 120LED/Meter



Features:

- 1, LED Type: SMD 3527
- 2, High brightness & low power consumption.
- 3, CRI80 SMD LED.
- 4, Long life span LED lights, more than 50,000 hours+.
- 5, Operating temperature: -20~50°C.
- 6, Dimmable to 6V DC.
- 7, Adhesive back, peel & stick!
- 8, IP20, IP54, IP67 and IP68 waterproof are all available.

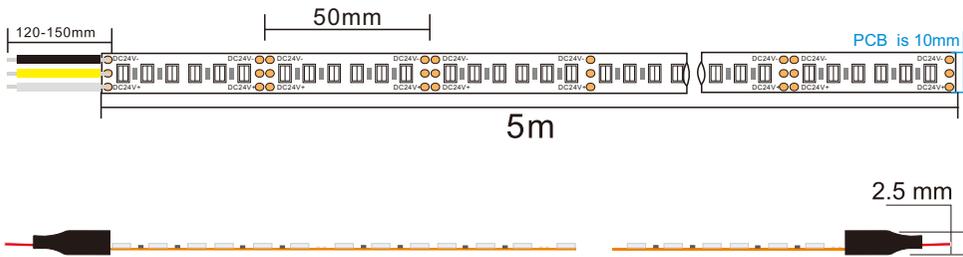

✂ Said the cutting area. All LED's view angle is 120°.

SMD3527,120LED/meter, Dual color.

Part Number	Size	Color	Cut every (LEDS)	LED Qty/M	Lumen/M	Voltage	Power/m	Packing/m
3527FWW+CW120	L5000*W10*H3	WW+CW	6	120	720+810	12/24V	19.2W	5 Meters/reel
3527FWW+Blue120		WW+Blue			720+200			



White+Warm white



Cool White+Blue


FLEXIBLE LED STRIP SERIES

3527 RGBW LED Strip, 120LED/Meter



Features:

- 1, LED Type: SMD 3527
- 2, High brightness & low power consumption.
- 3, Long life span LED lights, more than 50,000 hours+.
- 4, Operating temperature: -20~50°C.
- 5, Dimmable to 6V DC.
- 6, Adhesive back, peel & stick!
- 7, IP20, IP54, IP67 and IP68 waterproof are all available.

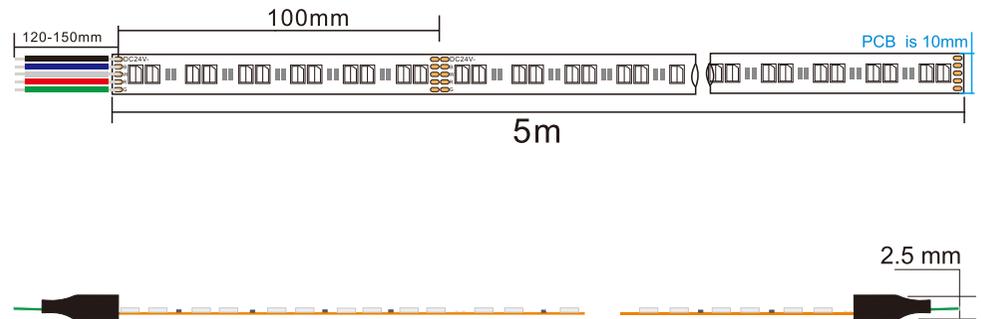

✂ Said the cutting area. All LED's view angle is 120°.

SMD3527RGBW,120LED/meter

Part Number	Size	Color	Cut every (LEDS)	LED Qty/M	Lumen/M	Voltage	Power/m	Packing/m
3527FRGBW120	L5000*W10*H3	RGBW	12	120	1620	12/24V	19.2W	5 Meters/reel


FLEXIBLE LED STRIP SERIES

3528 Single Color 240S LED/Meter



Features:

- 1, LED Type: SMD 3528
- 2, High brightness & low power consumption.
- 3, CRI80 SMD LED.
- 4, Long life span LED lights, more than 50,000 hours+.
- 5, Operating temperature: -20~50°C.
- 6, Dimmable to 6V DC.
- 7, Adhesive back, peel & stick!

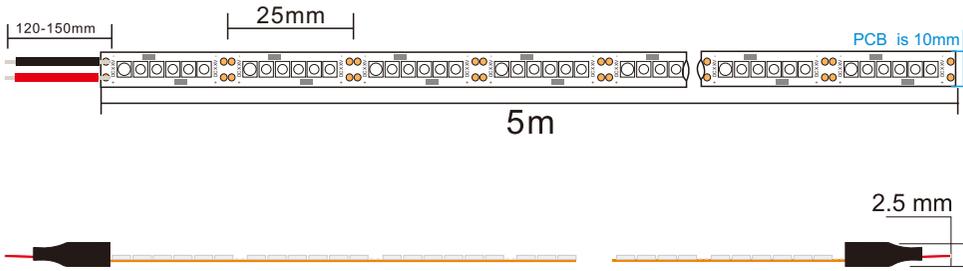

✂ Said the cutting area. All LED's view angle is 120°.

SMD3528,240S LED/meter								
Part Number	Size	Color	Cut every (LEDS)	LED Qty/M	Lumen/M	Voltage	Power/m	Packing/m
3528FWW240S	L5000*W10*H3	WW	6	240	1200	24V	19.2W	5 Meters/reel
3528FNW240S		NW			1300			
3528FCW240S		CW			1400			
3528FR240S		Red			640			
3528FY240S		Yellow			640			
3528FB240S		Blue			768			
3528FG240S		Green			1280			
3528FP240S		Pink			640			


FLEXIBLE LED STRIP SERIES

3528 Single Color 240D LED/Meter-Double lines



Features:

- 1, LED Type: SMD 3528
- 2, High brightness & low power consumption.
- 3, CRI80 SMD LED.
- 4, Long life span LED lights, more than 50,000 hours+.
- 5, Operating temperature: -20~50°C.
- 6, Dimmable to 6V DC.
- 7, Adhesive back, peel & stick!
- 8, IP20, IP54, IP67 and IP68 waterproof are all available.

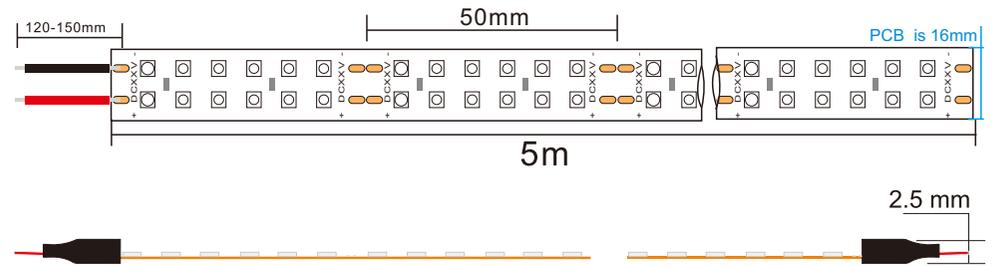

✂ Said the cutting area. All LED's view angle is 120°.

SMD3528,240D LED/meter-Double lines								
Part Number	Size	Color	Cut every (LEDS)	LED Qty/M	Lumen/M	Voltage	Power/m	Packing/m
3528FWW240D	L5000*W16*H3	WW	12	240	1400	24V	19.2W	5 Meters/reel
3528FNW240D		NW			1500			
3528FCW240D		CW			1600			
3528FR240D		Red			680			
3528FY240D		Yellow			680			
3528FB240D		Blue			810			
3528FG240D		Green			1320			
3528FP240D		Pink			680			


FLEXIBLE LED STRIP SERIES

3528 Single Color 60LED/Meter



Features:

- 1, LED Type: SMD 3528
- 2, High brightness & low power consumption.
- 3, CRI80 SMD LED.
- 4, Long life span LED lights, more than 50,000 hours+.
- 5, Operating temperature: -20~50°C.
- 6, Dimmable to 6V DC.
- 7, Adhesive back, peel & stick!
- 8, IP20, IP54, IP67 and IP68 waterproof are all available.

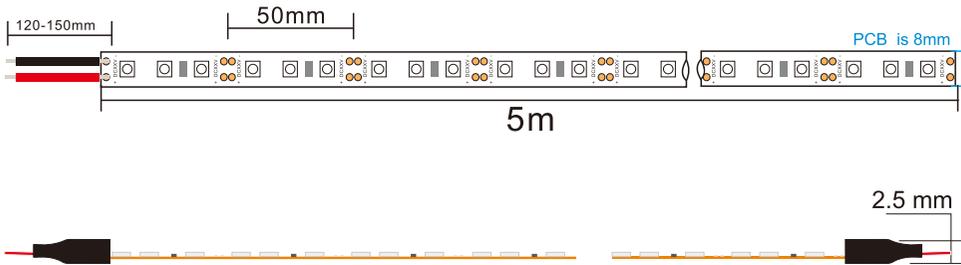

✂ Said the cutting area. All LED's view angle is 120°.

SMD3528,60LED/meter								
Part Number	Size	Color	Cut every (LEDS)	LED Qty/M	Lumen/M	Voltage	Power/m	Packing/m
3528FWW60	L5000*W8*H3	WW	3	60	360	12/24V	4.8W	5 Meters/reel
3528FNW60		NW			375			
3528FCW60		CW			390			
3528FR60		Red			120			
3528FY60		Yellow			120			
3528FB60		Blue			150			
3528FG60		Green			240			
3528FP60		Pink			120			


FLEXIBLE LED STRIP SERIES

3528 Single Color 120LED/Meter



Features:

- 1, LED Type: SMD 3528
- 2, High brightness & low power consumption.
- 3, CRI80 SMD LED.
- 4, Long life span LED lights, more than 50,000 hours+.
- 5, Operating temperature: -20~50°C.
- 6, Dimmable to 6V DC.
- 7, Adhesive back, peel & stick!
- 8, IP20, IP54, IP67 and IP68 waterproof are all available.

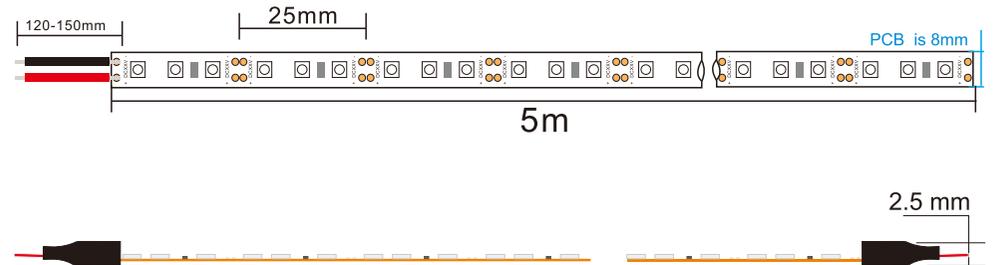

✂ Said the cutting area. All LED's view angle is 120°.

SMD3528,120LED/meter								
Part Number	Size	Color	Cut every (LEDS)	LED Qty/M	Lumen/M	Voltage	Power/m	Packing/m
3528FWW120	L5000*W8*H3	WW	3	120	720	12/24V	9.6W	5 Meters/reel
3528FNW120		NW			750			
3528FCW120		CW			780			
3528FR120		Red			240			
3528FY120		Yellow			240			
3528FB120		Blue			300			
3528FG120		Green			480			
3528FP120		Pink			240			

FLEXIBLE LED STRIP SERIES


5025 Color temperature adjustable strip,60LED/Meter



2 chips in one

Features:

- 1, LED Type: SMD 5025
- 2, High brightness & low power consumption.
- 3, CRI80 SMD LED.
- 4, Long life span LED lights, more than 50,000 hours+.
- 5, Operating temperature: -20~50°C.
- 6, Dimmable to 6V DC.
- 7, Adhesive back, peel & stick!
- 8, IP20, IP54, IP67 and IP68 waterproof are all available.

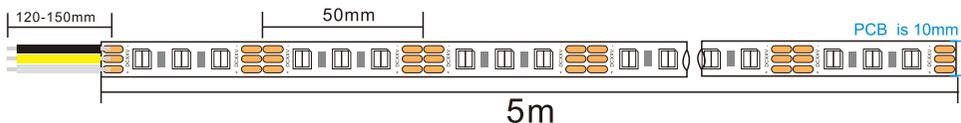

✂ Said the cutting area. All LED's view angle is 120°.

SMD5025,60LED/meter, Dual color.

Part Number	Size	Color	Cut every (LEDS)	LED Qty/M	Lumen/M	Voltage	Power/m	Packing/m
5025FWW+CW60	L5000*W10*H3	WW+CW	3	60	780-900	12V	14.4W	5 Meters/reel


FLEXIBLE LED STRIP SERIES

5050 single color/RGB, 30LED/meter



Features:

- 1, LED Type: SMD 5050
- 2, High brightness & low power consumption.
- 3, CRI80 SMD LED(single color).
- 4, Long life span LED lights, more than 50,000 hours+.
- 5, Operating temperature: -20~50°C.
- 6, Dimmable to 6V DC.
- 7, Adhesive back, peel & stick!
- 8, IP20, IP54, IP67 and IP68 waterproof are all available.

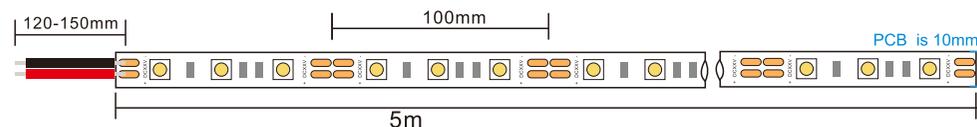

✂ Said the cutting area. All LED's view angle is 120°.

SMD5050,30LED/meter

Part Number	Size	Color	Cut every (LEDS)	LED Qty/M	Lumen/M	Voltage	Power/m	Packing/m
5050FRGB30	L5000*W10*H3	Red	3	30	60	12/24V	7.2W	5 Meters/reel
		Green			120			
		Blue			75			
5050FWW30	L5000*W10*H3	WW	3	30	375	12/24V	7.2W	5 Meters/reel
NW		420						
CW		480						
5050FR30		Red			180			
5050FY30	Yellow	18						
5050FB30	Blue	225						
5050FG30	Green	360						
5050FP30	Pink	180						


FLEXIBLE LED STRIP SERIES

5050 Dream color LED strip, 32LED/meter



Features:

- 1, LED Type: SMD 5050
- 2, Each LED has a address IC and is programmable.
- 3, High brightness & low power consumption.
- 4, Long life span LED lights, more than 50,000 hours+.
- 5, Operating temperature: -20~50°C.
- 6, Dimmable to 5V DC.
- 7, Adhesive back, peel & stick!
- 8, IP20, IP54, IP67 and IP68 waterproof are all available.

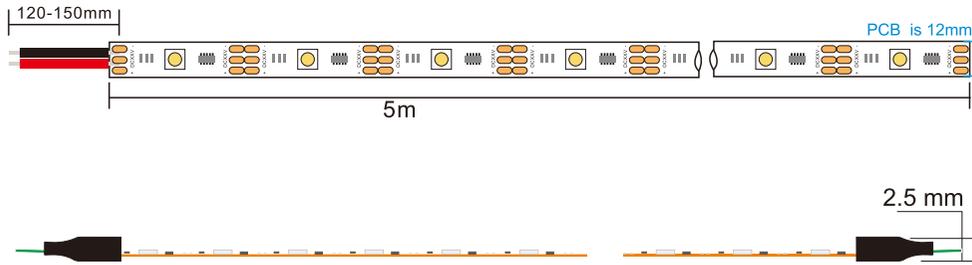

✂ Said the cutting area. All LED's view angle is 120°.

SMD5050,32LED/meter								
Part Number	Size	Color	Cut every (LEDS)	LED Qty/M	Lumen/M	Voltage	Power/m	Packing/m
5050FW32	L5000*W12*H3	Red	1	32	40-50	5V	9.6W	5 Meters/reel
		Green			100-110			
		Blue			35-45			


FLEXIBLE LED STRIP SERIES

5050 single color, 72LED/meter



Features:

- 1, LED Type: SMD 5050
- 2, High brightness & low power consumption.
- 3, CR180 SMD LED.
- 4, Long life span LED lights, more than 50,000 hours+.
- 5, Operating temperature: -20~50°C.
- 6, Dimmable to 6V DC.
- 7, Adhesive back, peel & stick!
- 8, IP20, IP54, IP67 and IP68 waterproof are all available.

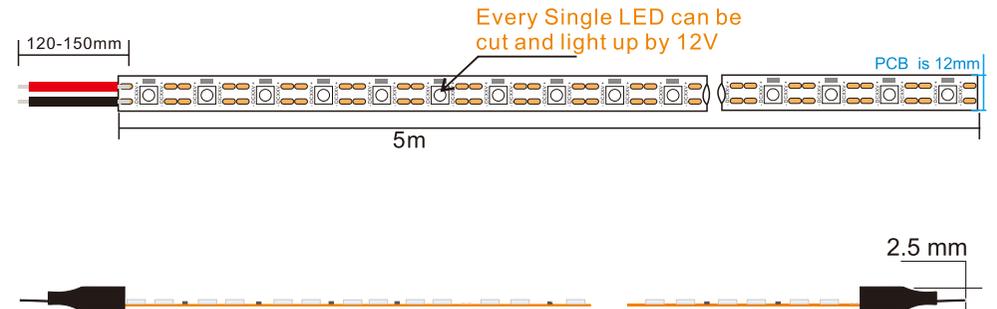


✂ Said the cutting area. All LED's view angle is 120°.
Every LED can be cut down.

SMD5050,72LED/meter								
Part Number	Size	Color	Cut every (LEDS)	LED Qty/M	Lumen/M	Voltage	Power/m	Packing/m
5050FWW72	L5000*W12*H3	WW	1	72	800	12V	17.3W	5 Meters/reel
5050FNW72		NW			960			
5050FCW72		CW			1100			


FLEXIBLE LED STRIP SERIES

5050 Single color/RGB, 60LED/meter

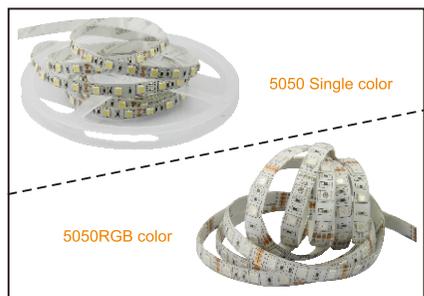

Features:

- 1, LED Type: SMD 5050
- 2, High brightness & low power consumption.
- 3, CRI80 SMD LED(single color).
- 4, Long life span LED lights, more than 50,000 hours+.
- 5, Operating temperature: -20~50°C.
- 6, Dimmable to 6V DC.
- 7, Adhesive back, peel & stick!
- 8, IP20, IP54, IP67 and IP68 waterproof are all available.

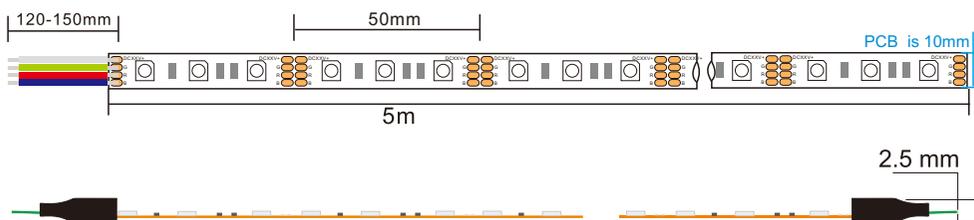

✂ Said the cutting area. All LED's view angle is 120°.

SMD5050,60LED/meter								
Part Number	Size	Color	Cut every (LEDS)	LED Qty/M	Lumen/M	Voltage	Power/m	Packing/m
5050FRGB60	L5000*W10*H3	Red	3	60	120	12/24V	14.4W	5 Meters/reel
		Green			240			
		Blue			150			
5050FWW60	L5000*W10*H3	WW	3	60	1080	12/24V	14.4W	5 Meters/reel
NW		1140						
CW		1200						
Red		360						
Yellow		360						
Blue		450						
Green		720						
Pink		360						


FLEXIBLE LED STRIP SERIES

5050 RGBW, 60LED/meter



Features:

- 1, LED Type: SMD 5050
- 2, High brightness & low power consumption.
- 3, Long life span LED lights, more than 50,000 hours+.
- 4, Operating temperature: -20~50°C.
- 5, Dimmable to 6V DC.
- 6, Adhesive back, peel & stick!
- 7, IP20, IP54, IP67 and IP68 waterproof are all available.

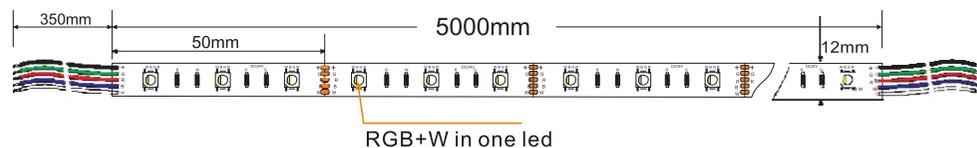

✂ Said the cutting area. All LED's view angle is 120°.

SMD5050,60LED/meter								
Part Number	Size	Color	Cut every (LEDS)	LED Qty/M	Lumen/M	Voltage	Power/m	Packing/m
5050FRGBW60	L5000*W12*H3	Red	6	60	98	12V/24V	14.4W	5 Meters/reel
		Green			362			
		Blue			90			
		NW			356			


FLEXIBLE LED STRIP SERIES

5050 Single color, 120D LED/meter-Double rows



Features:

- 1, LED Type: SMD 5050
- 2, High brightness & low power consumption.
- 3, CRI80 SMD LED.
- 4, Long life span LED lights, more than 50,000 hours+.
- 5, Operating temperature: -20~50°C.
- 6, Dimmable to 6V DC.
- 7, Adhesive back, peel & stick!
- 8, IP20, IP54, IP67 and IP68 waterproof are all available.

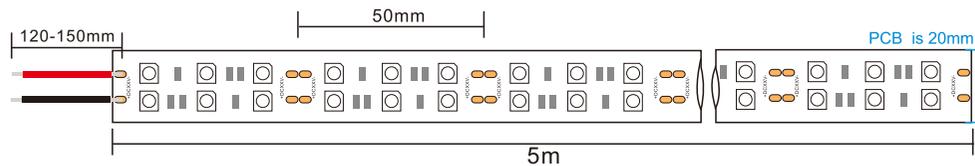

✂ Said the cutting area. All LED's view angle is 120°.

SMD5050, 120D LED/meter-Double rows								
Part Number	Size	Color	Cut every (LEDS)	LED Qty/M	Lumen/M	Voltage	Power/m	Packing/m
5050FWW120D	L5000*W20*H3	WW	6	120	1888	24V	28.8W	5 Meters/reel
5050FNW120D		NW			2280			
5050FCW120D		CW			2400			


FLEXIBLE LED STRIP SERIES

5050 Color temperature adjustable, 120LED/meter



Features:

- 1, LED Type: SMD 5050
- 2, High brightness & low power consumption.
- 3, CRI80 SMD LED.
- 4, Long life span LED lights, more than 50,000 hours+.
- 5, Operating temperature: -20~50°C.
- 6, Dimmable to 6V DC.
- 7, Adhesive back, peel & stick!
- 8, IP20, IP54, IP67 and IP68 waterproof are all available.

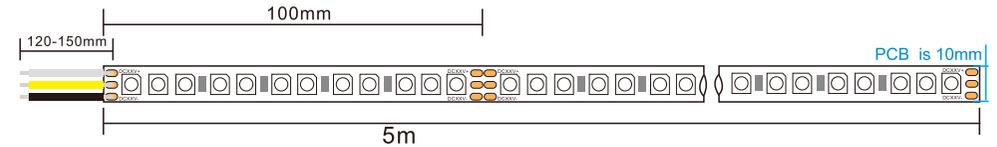

✂ Said the cutting area. All LED's view angle is 120°.

SMD5050,120LED/meter, Dual color.								
Part Number	Size	Color	Cut every (LEDS)	LED Qty/M	Lumen/M	Voltage	Power/m	Packing/m
5050FWW+CW120	L5000*W10*H3	WW+CW	12	120	1500-1920	12V	28.8W	5 Meters/reel


FLEXIBLE LED STRIP SERIES

5050 Single color, 200LED/meter



Features:

- 1, LED Type: SMD 5050
- 2, High brightness & low power consumption.
- 3, CRI80 SMD LED.
- 4, Long life span LED lights, more than 50,000 hours+.
- 5, Operating temperature: -20~50°C.
- 6, Dimmable to 6V DC.
- 7, Adhesive back, peel & stick!

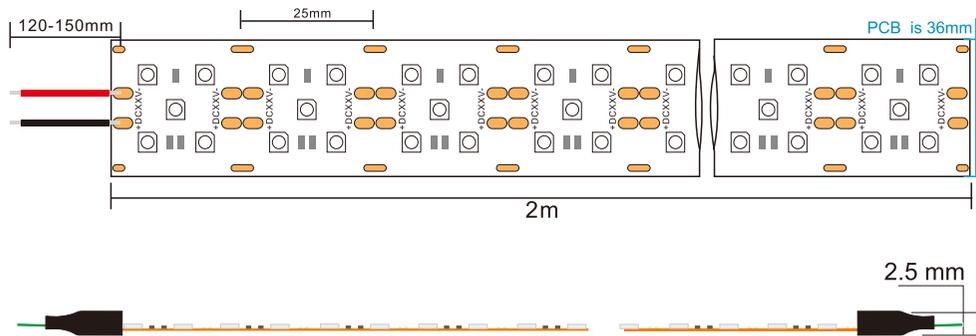


✂ Said the cutting area. All LED's view angle is 120°.

SMD5050, 200LED/meter-Double rows								
Part Number	Size	Color	Cut every (LEDS)	LED Qty/M	Lumen/M	Voltage	Power/m	Packing/m
5050FWW200	L2000*W36*H3	WW ■	5	200	3600	24V	56W	2 Meters/reel
5050FNW200		NW ■			3800			
5050FCW200		CW ■			4000			


FLEXIBLE LED STRIP SERIES

5050 Single color, 280LED/meter

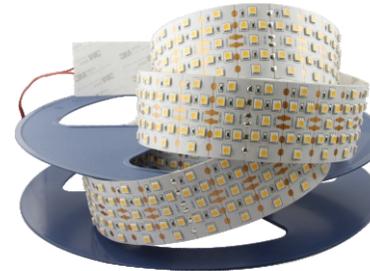

Features:

- 1, LED Type: SMD 5050
- 2, High brightness & low power consumption.
- 3, CRI80 SMD LED.
- 4, Long life span LED lights, more than 50,000 hours+.
- 5, Operating temperature: -20~50°C.
- 6, Dimmable to 6V DC.
- 7, Adhesive back, peel & stick!

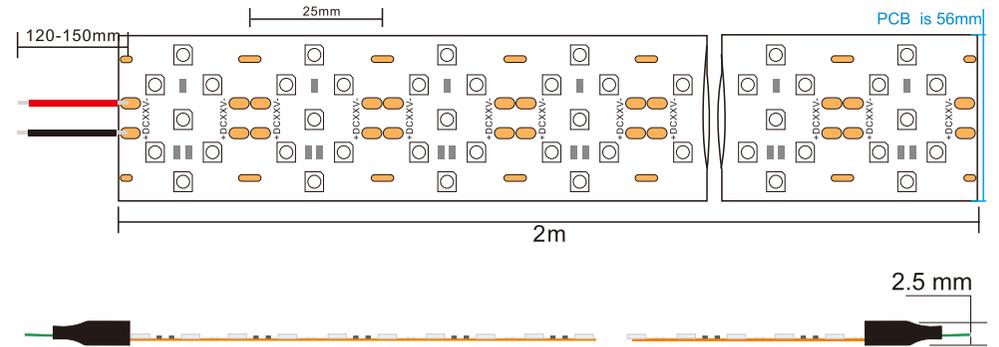

✂ Said the cutting area. All LED's view angle is 120°.

SMD5050, 280LED/meter-Double rows								
Part Number	Size	Color	Cut every (LEDS)	LED Qty/M	Lumen/M	Voltage	Power/m	Packing/m
5050FWW280	L2000*W56*H3	WW ■	7	280	5060	24V	56W	2 Meters/reel
5050FNW280		NW ■			5320			
5050FCW280		CW ■			5600			


FLEXIBLE LED STRIP SERIES

5730 Single color, 60LED/meter



Features:

- 1, LED Type: SMD 5730
- 2, High brightness & low power consumption.
- 3, CRI80 SMD LED.
- 4, Long life span LED lights, more than 50,000 hours+.
- 5, Operating temperature: -20~50°C.
- 6, Dimmable to 6V DC.
- 7, Adhesive back, peel & stick!
- 8, IP20, IP54, IP67 and IP68 waterproof are all available.

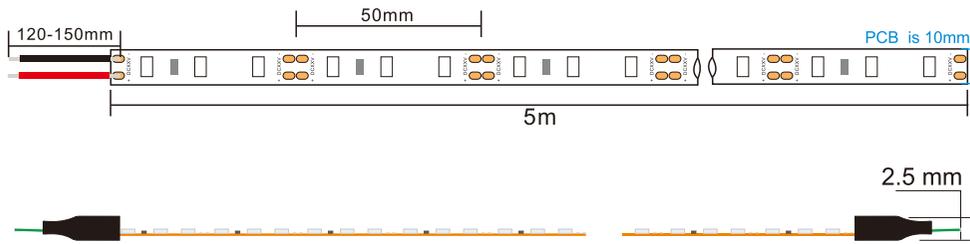


✂ Said the cutting area. All LED's view angle is 120°.

SMD5730, 60LED/meter								
Part Number	Size	Color	Cut every (LEDS)	LED Qty/M	Lumen/M	Voltage	Power/m	Packing/m
5730FWW60	L5000*W10*H3	WW	3	60	1380	12/24V	19.8W	5 Meters/reel
5730FNW60		NW			1560			
5730FCW60		CW			1800			
5730FR60		Red			460			
5730FY60		Yellow			460			
5730FB60		Blue			600			
5730FG60		Green			920			
5730FP60		Pink			460			


FLEXIBLE LED STRIP SERIES

335 Side edge emitting, 60LED/meter



Features:

- 1, LED Type: SMD 335
- 2, High brightness & low power consumption.
- 3, CRI80 SMD LED.
- 4, Long life span LED lights, more than 50,000 hours+.
- 5, Operating temperature: -20~50°C.
- 6, Dimmable to 6V DC.
- 7, Adhesive back, peel & stick!
- 8, IP20, IP54, IP67 and IP68 waterproof are all available.

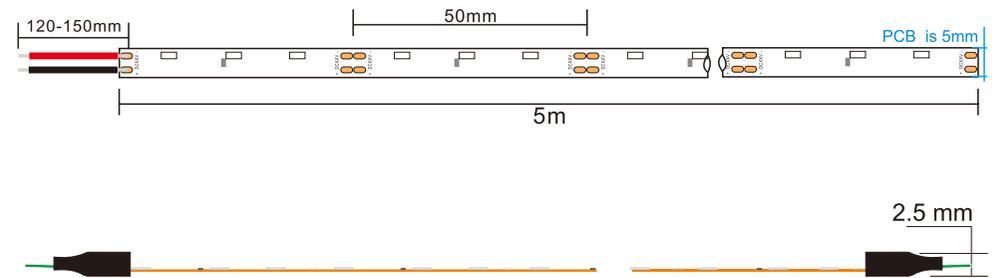

✂ Said the cutting area. All LED's view angle is 120°.


SMD335, 60LED/meter-Side edge emitting									
Part Number	Size	Color	Cut every (LEDS)	LED Qty/M	Lumen/M	Voltage	Power/m	Packing/m	
335FWW60	L5000*W5*H3	WW	3	60	240	12V	4.4W	5 Meters/reel	
335FNW60		NW			300				
335FCW60		CW			360				
335FR60		Red			120				
335FY60		Yellow			120				
335FB60		Blue			150				
335FG60		Green			240				
335FP60		Pink			120				

335 Side edge emitting, 96LED/meter



Features:

- 1, LED Type: SMD 335
- 2, High brightness & low power consumption.
- 3, CRI80 SMD LED.
- 4, Long life span LED lights, more than 50,000 hours+.
- 5, Operating temperature: -20~50°C.
- 6, Dimmable to 6V DC.
- 7, Adhesive back, peel & stick!
- 8, IP20, IP54, IP67 and IP68 waterproof are all available.

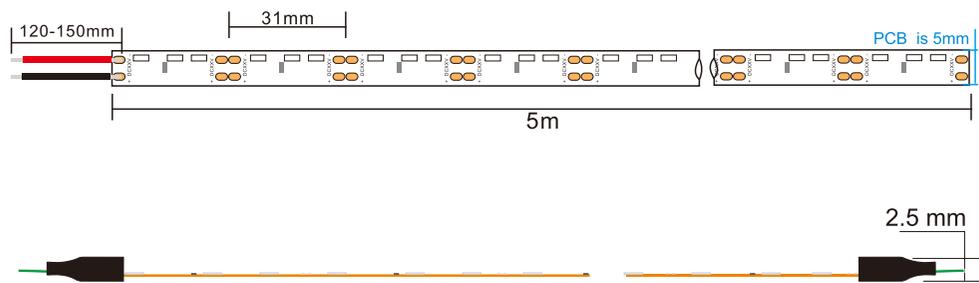

✂ Said the cutting area. All LED's view angle is 120°.

SMD335, 96LED/meter-Side edge emitting								
Part Number	Size	Color	Cut every (LEDS)	LED Qty/M	Lumen/M	Voltage	Power/m	Packing/m
335FWW96	L5000*W5*H3	WW ■	3	96	480	12V	7.6W	5 Meters/reel
335FNW96		NW ■			528			
335FCW96		CW ■			585			
335FR96		Red ■			192			
335FY96		Yellow ■			192			
335FB96		Blue ■			240			
335FG96		Green ■			384			
335FP96		Pink ■			192			

Note: All LED Strip can reach CRI above 80 or 90!

