

STARLINE

Indirect Lighting

Direct Lighting

Wall Washing

Brand

VIEW OF US
Worldwide Innovation Brand of Indoor LED Lighting

BRAND POSITIONING
LED Linear Lighting Solution Provider

BRAND STYLE
Concise | Trendy | Innovative

BRAND VALUE
Concentration | Profession | Acme | Innovation | Devotion


CONSIDERATION OF DESIGN
Simplification | User-friendly | Consumption

Production Facility



Wall Washing





Design principles

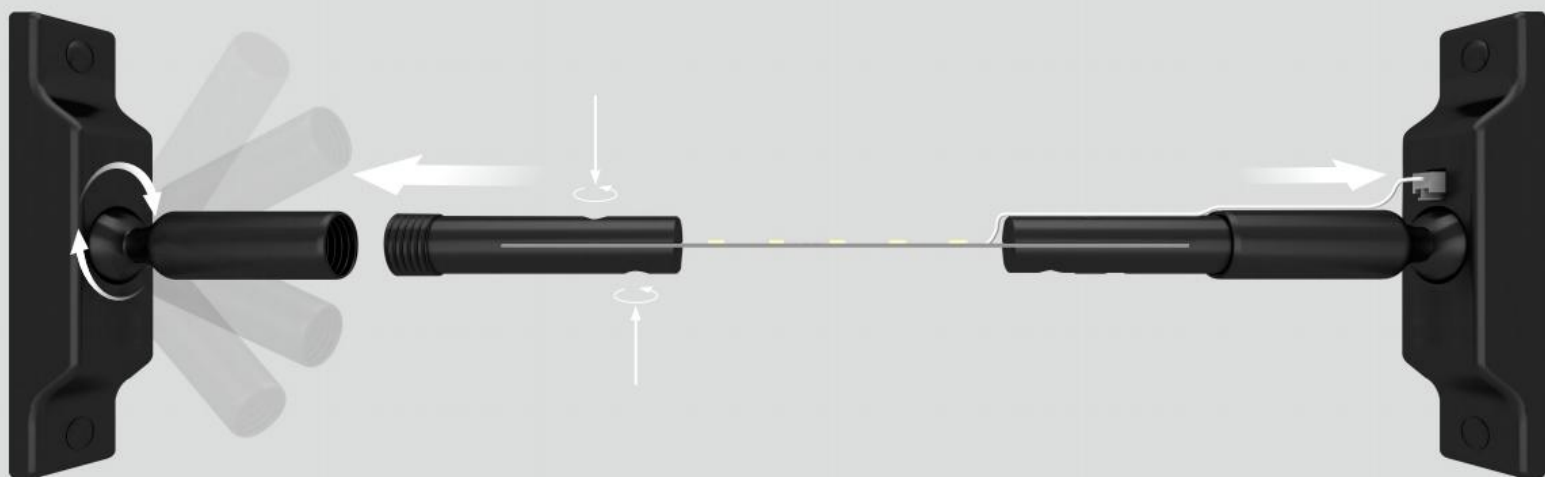


Application Guidelines

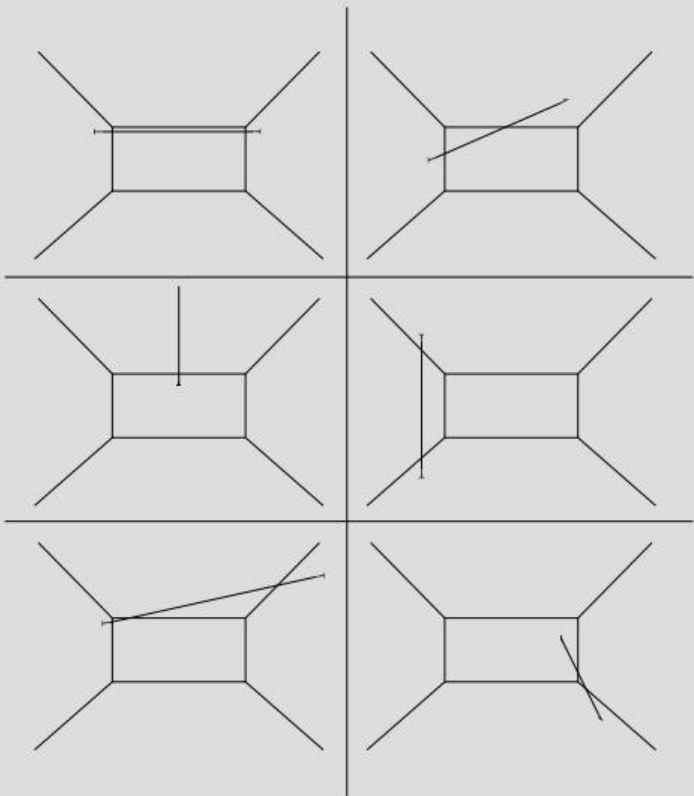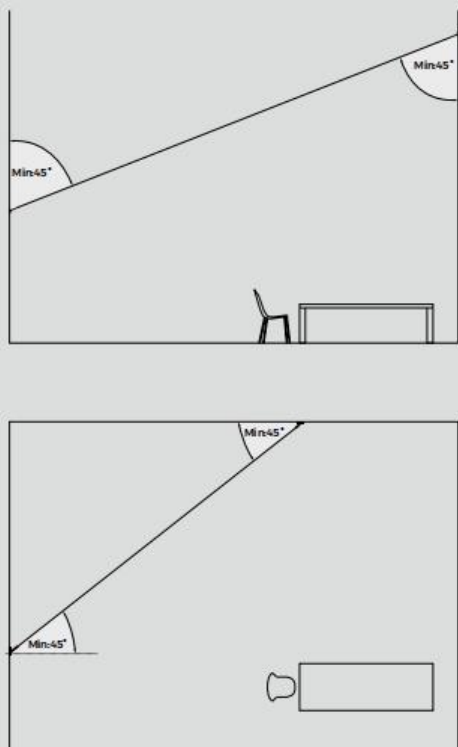

Installation guidelines

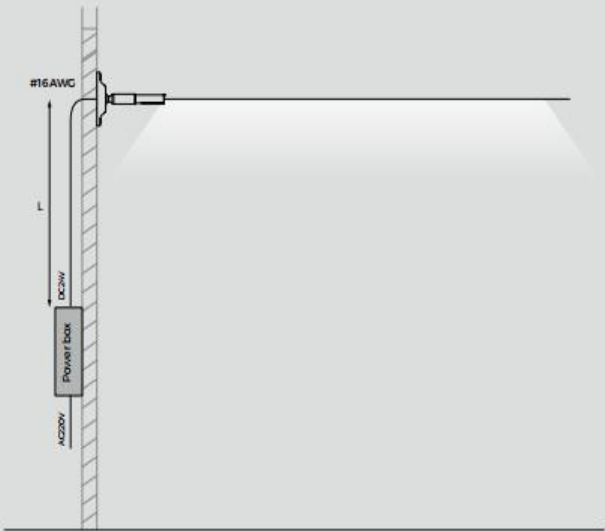
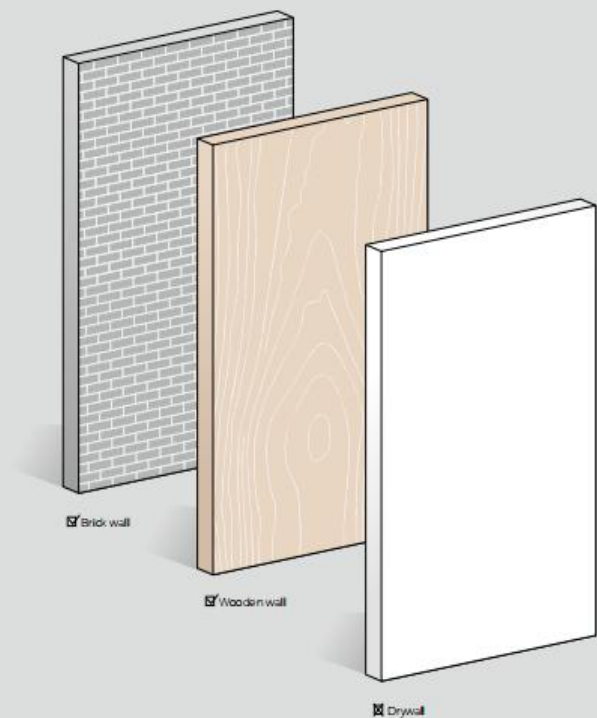


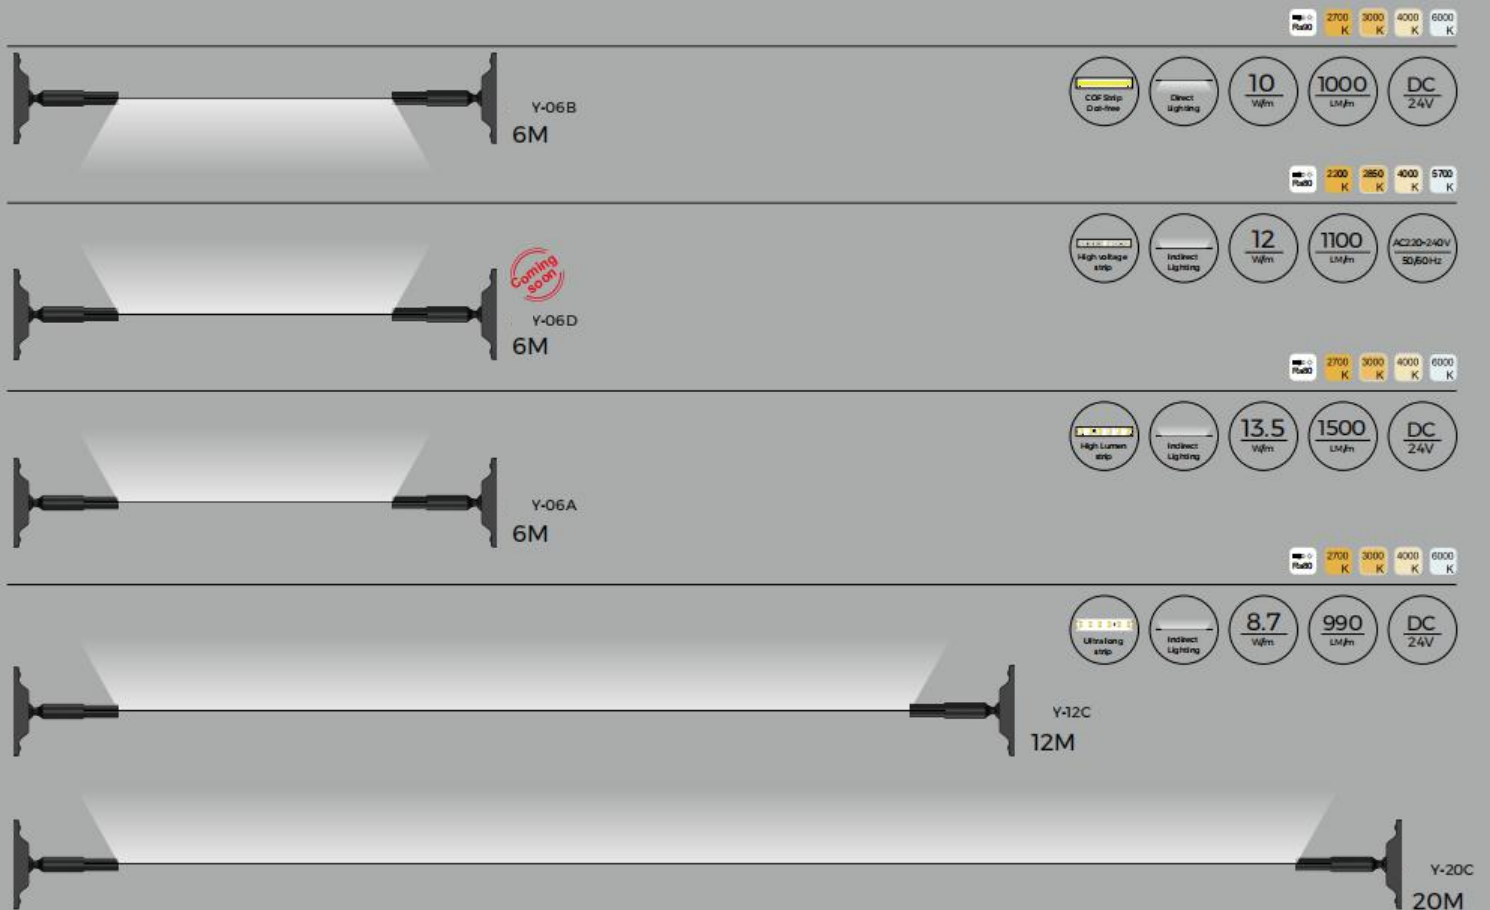



Parameters

Model	Y-06B	Y-06D Coming soon	Y-06A	Y-12C	Y-20C
Length	6M	6M	6M	12M	20M
Lighting source					
Input voltage	DC24V	AC220~240V, 50/60Hz	DC24V	DC24V	DC24V
CCT	   	   	   	   	   
CRI	>90	>80	>80	>80	>80
Typ. power	10W/m	12W/m	13.5W/m	8.7W/m	8.7W/m
Lumens	1000LM/m	1100LM/m	1500LM/m	990LM/m	990LM/m
Color	 	 	 	 	 



Optical & electronic data

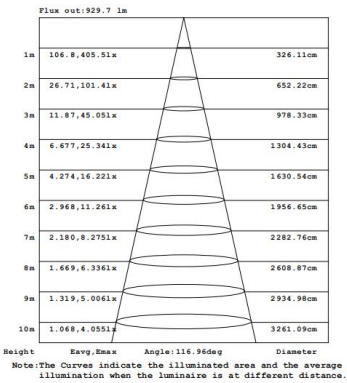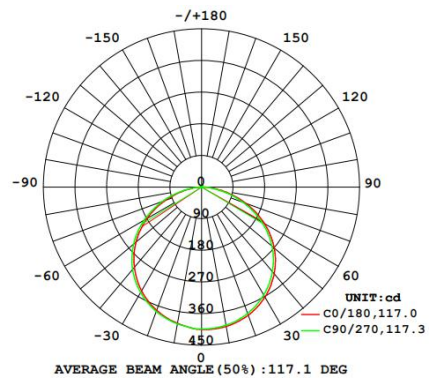



A

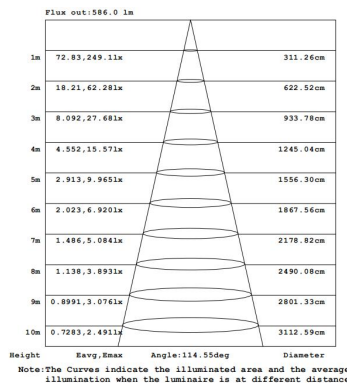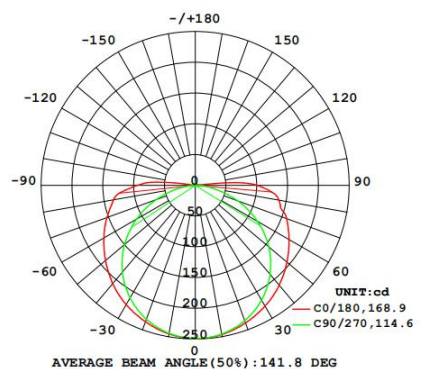

B

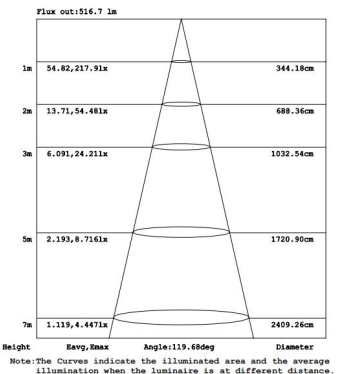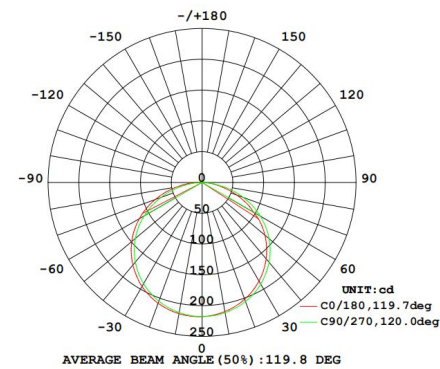

C

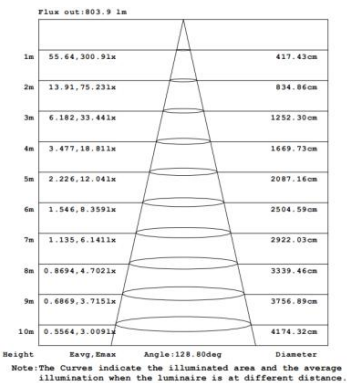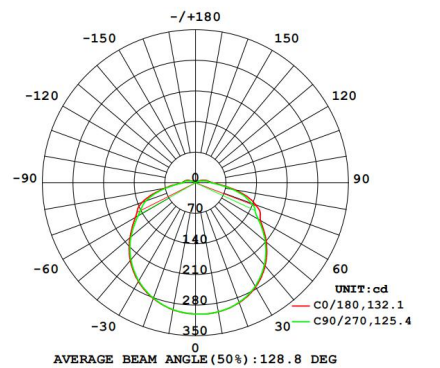

D





